

DYNAMax

The Ultimate Performance Concrete



Welcome to DYNAMax, high-strength concrete with a difference.


DYNAMax is a 60-100+MPa high-strength concrete that combines traditional strength, performance and quality properties with technical, innovation and service solutions to help you dematerialise your project.

Applications:

- Self compacting
- Piling
- Precast
- Post tension
- Core and columns
- Foundations
- Larger spans

Performance characteristics:

- Superior rigidity - 40+ GPa
- Outstanding durability - Max 750 Coulombs
- Low shrinkage - Nominal 500 microstrains
- Super workable
- Pumpability

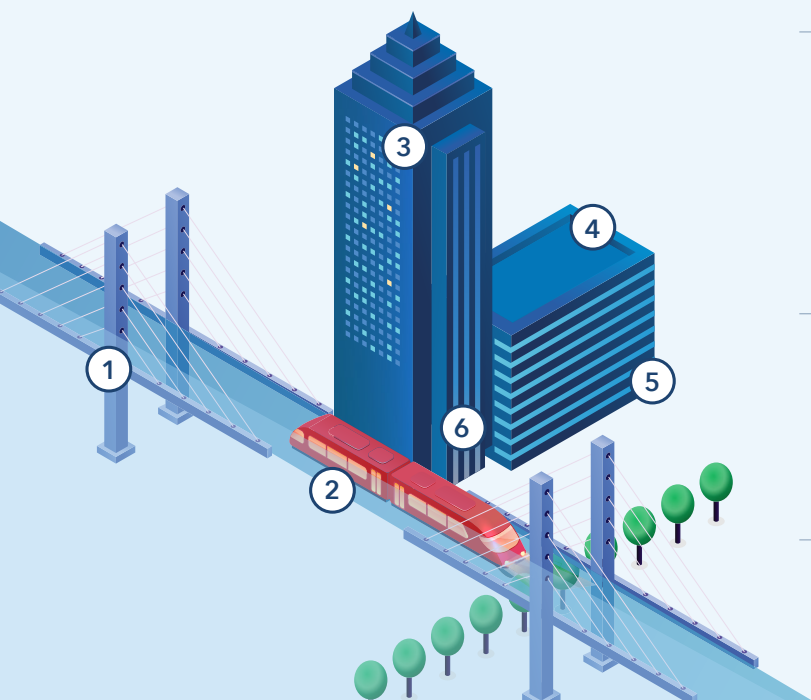

1 Exposed components

The dense pore structure ensures extremely resistant surfaces, increases service life and reduces maintenance costs of the load bearing structure.

4 Slabs

Reduced thickness allowing the separation of the supporting structure and building utilities, thus speeding up the construction process and facilitating later adjustments.

2 Large spans

High compressive strength and rigidity enable slender concrete construction with wide spans.

5 Carparks

Slim supporting structures simplify traffic routing, increase the number of parking bays and create more room height.

3 Columns and beams

Smaller cross-sections require less valuable space, thus increasing the usable area.

6 Stairwells & elevator shafts

Reduced wall thickness increases the usable area.




Dematerialise your project

- Reduce resource consumption
- More efficient structures and forms
- Contribute to the circular economy
- Recyclability and reuse



A unique service solution

- Innovative pumping tool with SMARTFLOW
- Maturity testing with SMARTCAST
- Thermal modelling with THERMAL
- Delivery reliability
- Carbon offsets
- Environmental Product Declarations on demand

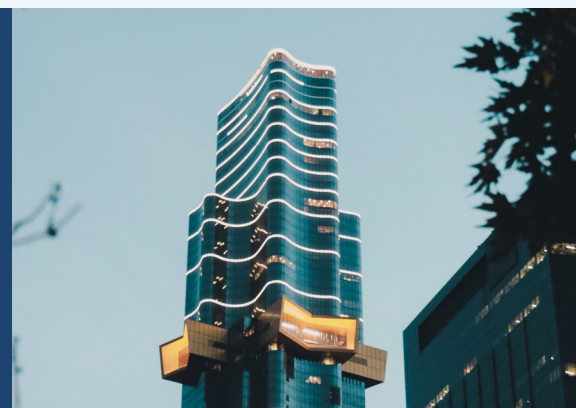

Australia 108, DYNAMax in action

**Get more, with less. Let's talk about how DYNAMax can help you.
Talk to our specification team today. [holcim.com.au/dynamax](https://www.holcim.com.au/dynamax)**

The information in this document is provided as is without any guarantees or warranty. Holcim (Australia) Pty. Ltd. and its affiliates make no warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights. In no case shall the information be considered a part of any terms and conditions of sale of Holcim. Users shall refer to local product data sheets and specifications for products concerned and the terms and conditions applicable to the sale of a product by Holcim.