Noise Monitoring Assessment

Lynwood Quarry, Marulan, NSW Quarter 4 Ending December 2019.



Prepared for: Holcim (Australia) Pty Ltd November 2019 MAC180611-02RP6

Document Information

Noise Monitoring Assessment

Lynwood Quarry, Marulan, NSW

Quarter 4 Ending December 2019

Prepared for: Holcim (Australia) Pty Ltd

Prepared by: Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-02RP6	Final	25 November 2019	Nicholas Shipman	N.Shp	Rod Linnett	RH Lat

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



CONTENTS

1		INTRODUCTION	.5
2		NOISE CRITERIA	.7
3		METHODOLOGY	.9
	3.1	LOCALITY	.9
	3.2	ASSESSMENT METHODOLOGY	.9
4		RESULTS 1	13
	4.1	ASSESSMENT RESULTS - LOCATION N1 1	13
	4.2	ASSESSMENT RESULTS - LOCATION N2 1	13
	4.3	ASSESSMENT RESULTS - LOCATION N3 1	14
	4.4	ASSESSMENT RESULTS - LOCATION N4 1	14
5		DISCUSSION 1	15
	5.1	DISCUSSION OF RESULTS - LOCATION N1 1	15
	5.2	DISCUSSION OF RESULTS - LOCATION N2 1	15
	5.3	DISCUSSION OF RESULTS - LOCATION N3 1	15
	5.4	DISCUSSION OF RESULTS - LOCATION N4 1	15
6		CONCLUSION 1	17

APPENDIX A - GLOSSARY OF TERMS





1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for Lynwood Quarry (the 'quarry'), Marulan, NSW.

The monitoring has been conducted in accordance with the Lynwood Noise Management Plan (NMP) and in general accordance with the Noise Policy for Industry (NPI), at four representative monitoring locations. This assessment has been undertaken for the Quarterly period ending December 2019, and forms part of the annual noise monitoring program to address conditions outlined in the Development Consent.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- Lynwood Quarry Noise Management Plan (NMP), 2016;
- Lynwood Quarry Environmental Protection Licence (EPL), 2013 (12939);
- Lynwood Quarry, Development Consent, 2005 (DA128-5-2005); and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.





2 Noise Criteria

The Lynwood Quarry Noise Management Plan (NMP), outlines the applicable noise criteria for residential receivers L1 – L16 surrounding the quarry, and are presented in **Table 1**.

Table 1 Noise Criteria ¹									
Location	Day (7am to 6pm)	Evening (6pm to 10pm)	Night (10pm to 7am)						
Location	dB LAeq(15min)	dB LAeq(15min)	dB LAeq(15min)	dB LA1(1min)					
L1	35	35	35	45					
L2	35	35	35	45					
L3	35	35	35	45					
L4	35	37	35	46					
L5	35	35	35	46					
L6	35	37	36	46					
L7	38	38	35	55					
L8	39	38	36	55					
L9	39	39	37	56					
L10	42	42	40	53					
L11	35	35	35 ¹	47					
L12	37	37	36	47					
L13	40	38	37	47					
L14	35	35	35	47					
L15	35	35	35	47					
L16	35	35	35	45					

Note 1: Noise criteria adopted from the EPL.





3 Methodology

3.1 Locality

The quarry is located near Marulan, NSW approximately 4km west of the town centre. Receivers in the locality surrounding the quarry are primarily rural and residential. The quarry is surrounded by rural properties to the west, with the Hume Highway situated to the east and south of the site. Highway traffic is a dominant noise source in the area along with rural noise. The monitoring locations with respect to the quarry and assessed receivers are presented in the locality plan in **Figure 1** and presented in **Table 2**.

Table 2 M	Table 2 Monitoring Location Addresses										
Location	on NMP ID Address			Criteria							
LUCATION		Addless	Day	Evening	Night						
N1	L1	South Eastern Boundary of 1114 Carrick Road, Marulan ¹	35	35	35						
N2	L6	End of Maclura Drive, Marulan	35	37	36						
N3	L11	Northern Boundary, 16038 Hume Highway, Marulan ¹	35	35	35 ²						
N4	L12	Corner of Dorsett and Suffolk Road, Marulan	37	37	36						

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods. Note 1: Intermediate noise monitoring point.

Note 2: Noise criteria adopted from the EPL.

3.2 Assessment Methodology

The attended noise measurements were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise" and the Lynwood Quarry EPL. The measurements were carried out using a Svantek Type 1, 971 noise analyser on Tuesday 19 November 2019 and Thursday 21 November 2019. The acoustic instrumentation used carries current NATA calibration and complies with AS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA.

Noise measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Measurements were conducted at four locations (N1-N4) on Tuesday 19 November 2019 and Thursday 21 November 2019 to satisfy the requirements of the NMP.



Extraneous noise sources were excluded from the analysis to determine the LAeq(15min) quarry noise contribution for comparison against the relevant criteria. In the event of quarry attributed noise being above criteria, prevailing meteorological conditions for the monitoring period are sourced from the onsite meteorological station and analysed in accordance with Fact Sheet A4 of the NPI to determine the stability category present at the time of each attended measurement.

Where the quarry is inaudible, the contribution is estimated to be at least 10dBA below the ambient noise level.











4 Results

4.1 Assessment Results - Location N1

The monitored noise level contributions and observed meteorological conditions for each assessment period at location N1 for the NMA are presented in **Table 3**.

Table 3 Operator-Attended Noise Survey Results – Location N1							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA	
Dale	Time (TIIS)	LAmax	LAeq	LA90	Meteorology	Description and SFL, dBA	
						Wind 38-56	
19/11/2019	15:51	64	49	43	WD: W WS: 3m/s	Birds 40-45	
19/11/2019	(Day)	64	49	43	Rain: Nil	Aircraft <45	
					Raiii. Nii	Holcim Site Inaudible	
	Lynwoo	d Quarry L	Aeq(15min)	Contribution		<30	
							Wind 40-61
21/11/2010	11:07	<u>c</u> e	FO	40	WD: NW	Livestock 45-51	
21/11/2019	(Day)		WS: 2m/s	Birds 41-45			
					Rain: Nil	Holcim Site Inaudible	
	Lynwoo	d Quarry L	Aeq(15min)	Contribution		<30	

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.2 Assessment Results - Location N2

The monitored noise level contributions and observed meteorological conditions for each assessment period at location N2 for the NMA are presented in **Table 4**.

Table 4 Operator-Attended Noise Survey Results – Location N2						
Date	Time (hrs)	Descript	or (dBA re	20 µPa)	Meteorology	Departmention and CDL dDA
Date	Time (TIIS)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
					WD: W	Wind 39-55
19/11/2019	14:43	72	47	42	WS: 2.5m/s	Birds <40
10/11/2010	(Day)	12	-11	72	Rain: Nil	Aircraft 40-45
						Holcim Site Inaudible
	Lynwo	od Quarry	LAeq(15min) Contributior	1	<30
						Wind 34-43
	10:05				WD: N	Birds 40-42
21/11/2019	(Day)	53	38	34	WS: 1.5m/s	Insects <38
	(Duy)				Rain: Nil	Aircraft 37-44
						Holcim Site Vehicle <33
	Lynwo	<33				

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



4.3 Assessment Results - Location N3

The monitored noise level contributions and observed meteorological conditions for each assessment period at location N3 for the NMA are presented in **Table 5**.

		Descript	or (dBA re	20 µPa)		
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
						Wind 37-50
	10 50				WD: W	Birds 44-50
19/11/2019	16:58 (Dav)	67	46	38	WS: 2.5m/s	Traffic <40
	(Day)				Rain: Nil	Aircraft <40
						Holcim Site Vehicle <35
	Lynwoo	d Quarry L	Aeq(15min)	Contribution		<35
						Birds 40-45
						Wind 40-53
21/11/2019	09:17	EG	10	20	WD: N WS: 2m/s	Aircraft 42-55
21/11/2019	1/2019 56 43 39 WS: 2n (Day) Rain: N	50	56 43 39		Traffic 38-44	
			rain. Nii	Holcim Site Vehicles <36		
						Holcim Site Hum 34-36
	Lynwor	d Quarry I	Acq(15min)	Contribution		35

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.4 Assessment Results - Location N4

The monitored noise level contributions and observed meteorological conditions for each assessment period at location N4 for the NMA are presented in **Table 6**.

Table 6 Operator-Attended Noise Survey Results – Location N4						
Date	Descriptor (dBA	or (dBA re	BA re 20 μPa) ————————————————————————————————————		Description and SPL, dBA	
Date	Time (hrs)	LAmax	LAeq	LA90	Weteorology	Description and SFE, dBA
					WD: NW	Wind 40-62
19/11/2019	15:07	73	53	42	WD. NW WS: 2.8m/s	Birds 40-46
19/11/2019	(Day)	73	55	42	Rain: Nil	Traffic 45-64
					rain. Nii	Holcim Site Inaudible
Lynwood Quarry LAeq(15min) Contribution						<30
					WD: NW	Wind 36-47
21/11/2019	10:27	65	41	38	WS: 1.6m/s	Birds 36-41
21/11/2013	(Day)	00	71	00		Traffic 36-38
					ixani. Ivii	Holcim Site Inaudible
	Lynwoo	<30				

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



5 Discussion

5.1 Discussion of Results - Location N1

Monitoring on Tuesday 19 November 2019 and Thursday 21 November 2019 identified that the quarry noise was inaudible during both daytime surveys with contributions estimated to be below 30dBA on both occasions therefore, satisfying the relevant noise criteria for both periods. Extraneous sources included wind, birds, aircraft, and livestock.

5.2 Discussion of Results - Location N2

Quarry noise emissions were inaudible on the Tuesday 19 November 2019 and therefore the quarry contribution was estimated to be <30dBA. Quarry noise emissions were audible on Thursday 21 November 2019 with Holcim site vehicles measured at <33dBA during the measurement, therefore satisfying the relevant noise criteria for both measurements. Extraneous sources measured included wind, birds, aircraft and insects.

5.3 Discussion of Results - Location N3

Quarry noise was audible during measurements on Tuesday 19 November 2019 and Thursday 21 November 2019 with quarry noise emissions estimated to be 35dBA, or less, therefore satisfying relevant noise criteria for both periods. Quarry noise sources audible during the survey included Holcim site vehicles and quarry hum. Extraneous noise sources included wind, birds, traffic and aircraft noise.

5.4 Discussion of Results - Location N4

Quarry noise was inaudible during the measurements conducted on Tuesday 19 November 2019 and Thursday 21 November 2019. Quarry noise emissions were estimated to be <30dBA for both daytime periods, therefore satisfying relevant noise criteria for both measurements. Non-quarrying sources included wind, birds and traffic.





6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) for Holcim (Australia) Pty Ltd at the Lynwood Quarry, Marulan, NSW. The assessment was completed to assess the quarry's compliance with the relevant noise criteria during Quarter 4 (ending December 2019).

Attended noise monitoring was undertaken on Tuesday 19 November 2019 and Thursday 21 November 2019 at four representative monitoring locations. The assessment has identified that noise emissions generated by Lynwood Quarry were occasionally audible, however quarry noise emissions were below the relevant noise criteria, satisfying the applicable noise criteria throughout the survey period.





Appendix A - Glossary of Terms



 Table A1 provides a number of technical terms have been used in this report.


Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice
	the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90
	statistical noise levels.
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site
	for a significant period of time (that is, wind occurring more than 30% of the time in any
	assessment period in any season and/or temperature inversions occurring more than 30% of the
	nights in winter).
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many
	sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human
	ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency
	response of the human ear.
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second
	equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of
	maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a
	source, and is the equivalent continuous sound pressure level over a given period.
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a
	measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing
	each assessment period over the whole monitoring period. The RBL is used to determine the
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a
	fundamental location of the source and is independent of the surrounding environment. Or a
	measure of the energy emitted from a source as sound and is given by :
	= 10.log10 (W/Wo)
	Where : W is the sound power in watts and Wo is the sound reference power at 10-12 watts.



Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA						
Source	Typical Sound Level					
Threshold of pain	140					
Jet engine	130					
Hydraulic hammer	120					
Chainsaw	110					
Industrial workshop	100					
Lawn-mower (operator position)	90					
Heavy traffic (footpath)	80					
Elevated speech	70					
Typical conversation	60					
Ambient suburban environment	40					
Ambient rural environment	30					
Bedroom (night with windows closed)	20					
Threshold of hearing	0					

 Table A2 provides a list of common noise sources and their typical sound level.



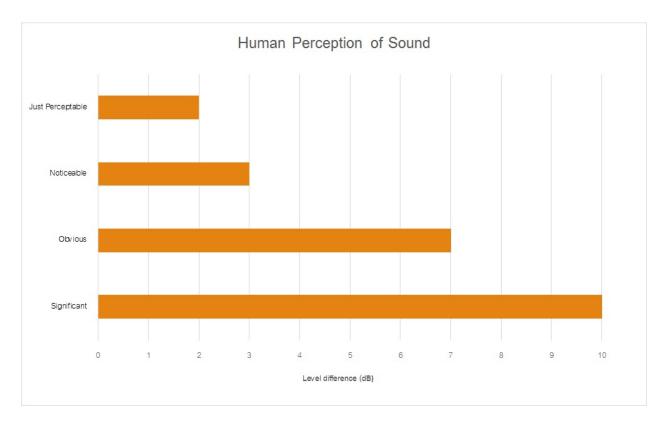



Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

