Noise Monitoring Assessment

Teven Quarry, Teven, NSW Quarter 3 Ending September 2022



Document Information

Noise Monitoring Assessment

Teven Quarry, Teven, NSW

Quarter 3 Ending September 2022

Prepared for: Holcim (Australia) Pty Ltd

Prepared by: Muller Acoustic Consulting Pty Ltd

PO Box 678, Kotara NSW 2289

ABN: 36 602 225 132 P: +61 2 4920 1833

www.mulleracoustic.com

Document ID	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-06RP17	7 September 2022	Nicholas Shipman	N. Sym	Rod Linnett	RULA

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



CONTENTS

1	I۱	ITRODUCTION	5
2	N	OISE CRITERIA	7
3	Μ	ETHODOLOGY	9
	3.1	LOCALITY	9
	3.2	NOISE MONITORING LOCATIONS	9
	3.3	ASSESSMENT METHODOLOGY	9
4	R	ESULTS	11
	4.1	ASSESSMENT RESULTS - LOCATION NM1	11
	4.2	ASSESSMENT RESULTS - LOCATION NM2	12
	4.3	ASSESSMENT RESULTS - LOCATION NM3	13
	4.4	ASSESSMENT RESULTS - LOCATION NM4	14
	4.5	ASSESSMENT RESULTS - LOCATION NM5	15
5	D	ISCUSSION	17
	5.1	DISCUSSION OF RESULTS - LOCATION NM1	17
	5.2	DISCUSSION OF RESULTS - LOCATION NM2	17
	5.3	DISCUSSION OF RESULTS - LOCATION NM3	17
	5.4	DISCUSSION OF RESULTS - LOCATION NM4	18
	5.5	DISCUSSION OF RESULTS - LOCATION NM5	18
6	С	ONCLUSION	19

APPENDIX A - GLOSSARY OF TERMS





1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for the quarterly period ending September 2022 for Teven Quarry (the 'quarry'), Teven, NSW.

The monitoring has been conducted in accordance with the Teven Noise Management Plan (NMP) and in general accordance with relevant conditions outlined in the Development Consent (ref: SSD 6422) at five representative monitoring locations. This assessment has been undertaken during Quarter 3, ending September 2022 and forms part of the noise monitoring program for the quarry.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA), Environmental Protection Licence (EPL 3293);
- NSW Department of Planning and Environment, Development Consent (SSD 6422), 2015;
- Teven Quarry Noise Management Plan Revision 1, 4 May 2016 (EMM); and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.





2 Noise Criteria

Schedule 3 of the Teven Quarry Development Consent (2015) outlines the applicable noise criteria for residential receivers surrounding the quarry site.

Table 1 reproduces relevant criteria for each of the receivers as outlined in the quarry's Development Consent.

Table 1 Noise Criteria							
	Quarry Operations						
Location ¹ ——	Period: Day	Period: Evening					
Location	7am – 6pm	6pm – 10pm					
	dB LAeq(15min)	dB LAeq(15min)					
R3, R4, R13, R15, R16, R17, R18, R20	38	35					
All other receivers	37	35					

Note 1: Receiver locations are shown in Figure 1.





3 Methodology

3.1 Locality

The quarry is located in Teven, NSW approximately 7km west of Ballina, NSW. Receivers in the locality surrounding the quarry are primarily rural residential. The surroundings of the quarry are primarily rural. The monitoring locations with respect to the quarry are presented in the locality plan shown in Figure 1.

3.2 Noise Monitoring Locations

Five monitoring locations have been selected as part of the NMA in accordance with the NMP. The selected monitoring locations are presented in Table 2 along with the noise sensitive receivers they represent.

Table 2 Monitoring Locations (MGA56 Coordinates)								
Location	Nearest Receiver	Easting, m	Northing, m					
NM1	R7	546737	6809918					
NM2	R3/R4	548892	6810285					
NM3	R2	547781	6808991					
NM4	R10	547576	6810379					
NM5	R14	548100	6810792					


3.3 Assessment Methodology

Attended noise surveys were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise and the NPI. Measurements were carried out using a Svantek Type 1, 971 noise analyser on Tuesday 30 August 2022 and Wednesday 31 August 2022. Acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA.

As per the Noise Management Plan, two daytime measurements were conducted at each monitoring location. It is noted that the quarry was not operating during the evening period, however two measurements were conducted at each monitoring location as per the requirements of the EPL.

Measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to determine the LAeq(15min) noise contribution for comparison against the relevant criteria. Where the quarry was inaudible, the contribution is estimated to be at least 10dB below the ambient noise level.



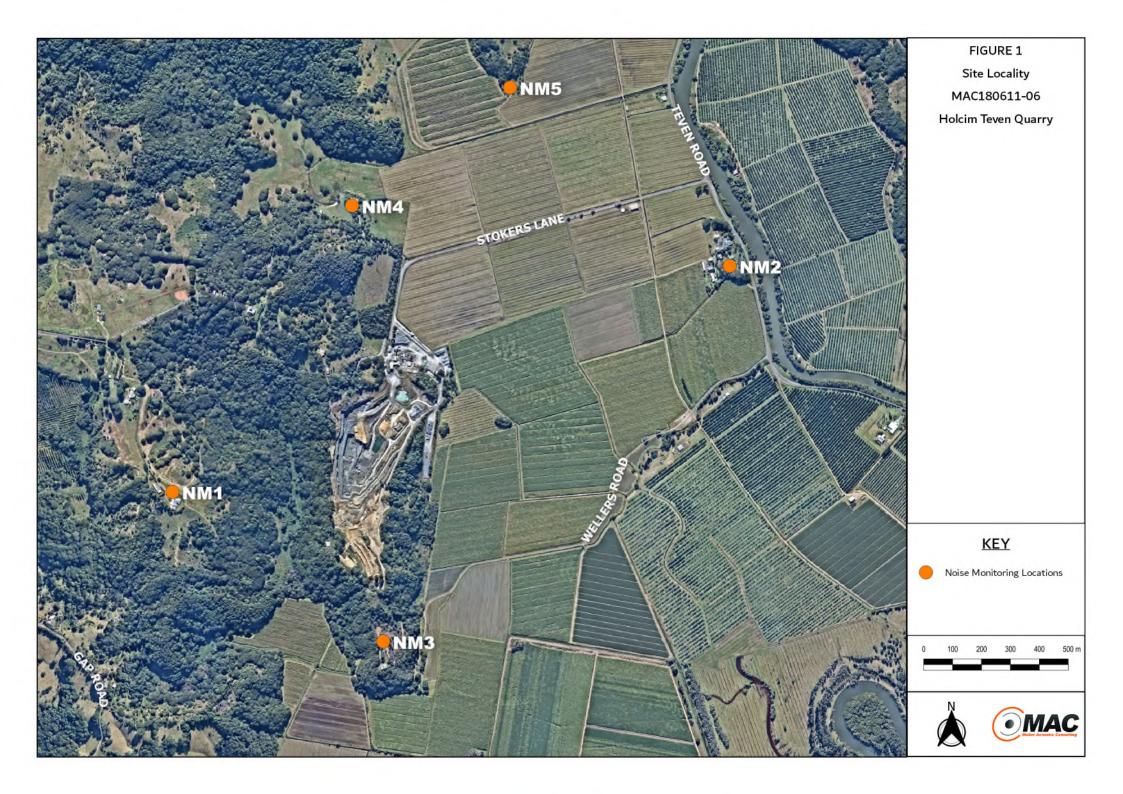

4 Results

4.1 Assessment Results - Location NM1

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM1 are presented in Table 3.

Table 3 Ope	Table 3 Operator-Attended Noise Survey Results – Location NM1						
Date	Time (hrs)	Descript LAmax	or (dBA re LAeq	20 μPa) LA90	Meteorology	Description and SPL, dBA	
31/08/2022	08:39 (Day)	72 n Quarry L	47 Aeq(15min)	34 Contribution	WD: NW WS: 1.6m/s Rain: Nil	Wind in trees 32-46 Birds 38-53 Traffic 34-72 Holcim mobile plant 30-34	
31/08/2022	08:54 (Day)	67	44	30	WD: NW WS: 1.2m/s Rain: Nil	Wind in trees 29-41 Birds 32-59 Traffic 34-67 Insects 29-34 Aircraft 31-42 Quarry inaudible	
30/08/2022	Teve	n Quarry L <i>i</i> 65	47	Contribution 45	WD: N WS: 0.1m/s Rain: Nil	<30 Insects 44-47 Birds 44-49 Traffic 46-65 Quarry inaudible	
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational	
30/08/2022	18:24 (Evening)	57	45	44	WD: N WS: 0.1m/s Rain: Nil	Insects 44-48 Traffic 44-57 Quarry inaudible	
	Teve		Quarry not operational				



4.2 Assessment Results - Location NM2

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM2 are presented in Table 4.

able 4 Ope	erator-Attend	ed Noise	Survey F	Results –	Location NM2	
Date	Time (hrs)	<u> </u>	or (dBA re	· · ·	Meteorology	Description and SPL, dBA
		LAmax ———	LAeq	LA90		
						Birds 41-56
	09:24				WD: NW	Traffic 37-84
31/08/2022	(Day)	84	63	45	WS: 0.3m/s	Aircraft 41-66
	(Day)				Rain: Nil	Construction noise 36-64
						Quarry inaudible
	Teven C	uarry LAeq	(15min) Cor	ntribution		<35
	09:39 (Day)				WD: NW WS: 0.2m/s	Birds 46-52
0.4.10.0.10.0.0.0		81	64	52		Traffic 46-81
31/08/2022						Construction noise 48-67
					Rain: Nil	Quarry inaudible
	Teven C	<38				
	18:52			42	WD N	Traffic 39-85
00/00/0000					WD: N	Insects 39-44
30/08/2022	(Evening)	85	58		WS: 0.1m/s	Aircraft 41-54
					Rain: Nil	Quarry inaudible
	Teven C	uarry LAeq	(15min) Cor	ntribution		Quarry not operational
30/08/2022	10.07				WD: N	Insects 38-44
	19:07 (Evening)	81	58	40	WS: 0.1m/s	Traffic 38-81
					Rain: Nil	Quarry inaudible
-	Teven C		Quarry not operational			



4.3 Assessment Results - Location NM3

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM3 are presented in Table 5.

D 1		Descriptor (dBA re 20 μPa)				
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
	**			; ·		Birds 29-48
	00.50				WD: NW	Insects 29-32
31/08/2022	09:59	55	36	31	WS: 0.2m/s	Traffic 32-36
	(Day)				Rain: Nil	Aircraft 30-55
						Quarry inaudible
	Teven	Quarry LAe	q(15min) Co	ntribution		<30
						Birds 30-50
	10:14				WD: NW	Insects 30-32
31/08/2022	-	50	0 38	33	WS: 0.2m/s	Traffic 31-34
	(Day)				Rain: Nil	Aircraft 30-44
						Quarry inaudible
	Teven	Quarry LAe	q(15min) Co	ntribution		<30
	40.04				WD: N	Insects 34-39
30/08/2022	19:31	51	38	34	WS: 0.1m/s	Traffic 38-51
	(Evening)				Rain: Nil	Quarry inaudible
	Teven	Quarry LAe	q(15min) Co	ntribution		Quarry not operational
	10.46				WD: N	Insects 33-37
30/08/2022	19:46	41	36	34	WS: 0.1m/s	Traffic 36-41
	(Evening)				Rain: Nil	Quarry inaudible
	Teven	Quarry LAe	q(15min) Co	ntribution		Quarry not operational



4.4 Assessment Results - Location NM4

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM4 are presented in Table 6.

Table 6 Ope	erator-Attend	ed Noise	Survey F	Results – I	Location NM4	
Date	Time (hrs)	Descript LAmax	or (dBA re LAeq	20 μPa) LA90	Meteorology	Description and SPL, dBA
31/08/2022	10:35 (Day)	87	62	48	WD: NW WS: 1.6m/s Rain: Nil	Birds 44-54 Wind in trees 45-55 Traffic 45-87 Quarry processing <43
	Teven C	uarry LAed	(15min) Cor	ntribution		37 ¹
31/08/2022	10:50 (Day)	81	57	48	WD: NW WS: 1.5m/s Rain: Nil	Birds 45-56 Wind in trees 45-52 Traffic 45-81 Insects <45 Quarry processing <42
	Teven C	uarry LAec	(15min) Cor	ntribution		37 ¹
30/08/2022	20:12 (Evening)	52	40	36	WD: N WS: 0.1m/s Rain: Nil	Traffic 32-52 Insects 32-46 Quarry inaudible
	Teven C	uarry LAed	(15min) Cor	ntribution		Quarry not operational
30/08/2022	20:27 (Evening)	55	41	37	WD: N WS: 0.1m/s Rain: Nil	Traffic 32-43 Insects 32-36 Aircraft 37-55 Quarry inaudible
	Teven C	uarry LAed	(15min) Cor	ntribution		Quarry not operational

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

Note 1: Contribution calculated at 108 Stockers Lane.



4.5 Assessment Results - Location NM5

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM5 are presented in Table 7.

Table 7 Operator-Attended Noise Survey Results – Location NM5						
Date	Time (hrs)	Descriptor (dBA re 20 μPa)			Motoorology	Description and SPL, dBA
Dale	rime (ms)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
31/08/2022	11:07 (Day)	79	56	41	WD: NW WS: 2m/s Rain: Nil	Traffic 38-79 Birds 41-64 Wind in trees 39-48 Quarry mobile plant <35
	Teven	Quarry LA	eq(15min) C	ontribution		<35
31/08/2022	11:22 (Day)	81	60	43	WD: NW WS: 2.2m/s	Traffic 41-81 Birds 42-59
		ay)			Rain: Nil	Wind in trees 41-49 Quarry mobile plant <35
	Teven	Quarry LA	eq(15min) C	ontribution		<35
30/08/2022	20:45 (Evening)	56	37	34	WD: N WS: 0.1m/s Rain: Nil	Insects 30-36 Traffic 30-56 Quarry inaudible
Teven Quarry LAeq(15min) Contribution						Quarry not operational
30/08/2022	21:00 (Evening)	77	49	31	WD: N WS: 0.1m/s Rain: Nil	Insects 29-35 Traffic 30-77 Quarry inaudible
	Teven	Quarry not operational				





5 Discussion

5.1 Discussion of Results - Location NM1

Quarry noise emissions were audible during one measurement throughout the measurement period on Tuesday 30 August 2022 and Wednesday 31 August 2022. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included wind in trees, birds, traffic, insects and aircraft.

5.2 Discussion of Results - Location NM2

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 31 August 2022. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, traffic, aircraft, construction noise and insects.

5.3 Discussion of Results - Location NM3

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 31 August 2022 Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, insects, traffic and aircraft.



5.4 Discussion of Results - Location NM4

Quarry noise emissions were audible during the daytime noise measurements conducted on Wednesday 31 August 2022. Quarry noise contributions were estimated to be 37dBA for both measurements and therefore satisfied the daytime noise limits.

It was observed that the stockpiles to the north of the processing area were significantly higher compared to the previous survey where compliance was not achieved.

The quarry was not operational during the evening period which satisfied the relevant evening noise limits however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included processing activities. Non quarry noise sources included birds, wind in trees, traffic, insects and aircraft.

5.5 Discussion of Results - Location NM5

Quarry noise emissions were audible during the daytime measurements conducted on Wednesday 31 August 2022. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits however background measurements were completed as per the requirements of the EPL.

It is noted that due to excessive rainfall access to receiver NM5 was not available. An intermediate location on Stokers Lane closer to the quarry was used to complete the assessment.

Non quarry noise sources observed during the measurements included traffic, birds, wind in trees and insects.



6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Holcim (Australia) Pty Ltd at Teven Quarry, Teven, NSW. The assessment was completed to determine the quarry's compliance with the relevant criteria outlined in their Development Consent for the relevant surrounding residential receivers during Quarter 3, ending September 2022.

Attended noise measurements were undertaken on Tuesday 30 August 2022 and Wednesday 31 August 2022 at five representative monitoring locations with quarry noise contributions compared against the relevant criteria.

The assessment has identified that noise emissions generated by Teven Quarry were audible on several occasions although complied with relevant criteria.





Appendix A - Glossary of Terms



Table A1 provides a number of technical terms have been used in this report.


Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice
	the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90
	statistical noise levels.
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site
	for a significant period of time (that is, wind occurring more than 30% of the time in any
	assessment period in any season and/or temperature inversions occurring more than 30% of the
	nights in winter).
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many
	sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human
	ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency
	response of the human ear.
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second
	equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of
	maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a
	source, and is the equivalent continuous sound pressure level over a given period.
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a
	measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing
	each assessment period over the whole monitoring period. The RBL is used to determine the
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a
	fundamental location of the source and is independent of the surrounding environment. Or a
	measure of the energy emitted from a source as sound and is given by:
	= 10.log10 (W/Wo)
	Where: W is the sound power in watts and Wo is the sound reference power at 10-12 watts.



Table A2 provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound	d Pressure Levels (SPL), dBA
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound

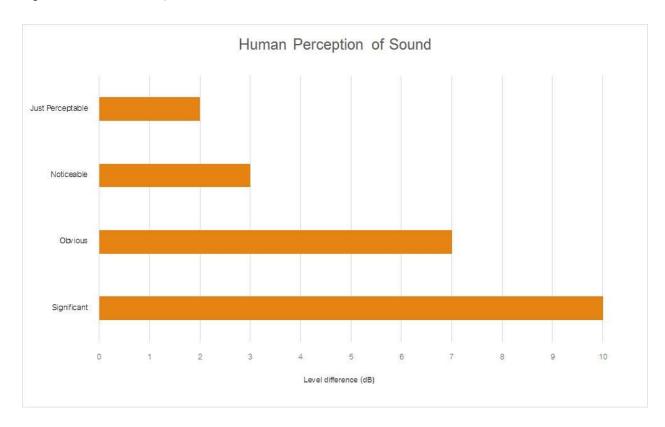



Muller Acoustic Consulting Pty Ltd PO Box 678, Kotara NSW 2289

ABN: 36 602 225 132 Ph: +61 2 4920 1833 www.mulleracoustic.com

