

18 February 2020

Matt Dodd
Quarry Manager- Pakenham
Holcim (Australia) Pty Ltd
95 Mount Shamrock Road, Pakenham

Dear Matt

2019 Groundwater and Spring Review, Pakenham Quarry

1.0 Introduction

AECOM Services Pty Ltd (AECOM) was engaged by Holcim (Australia) Pty Ltd (Holcim) to conduct annual monitoring and review of groundwater levels and spring flow/quality at the Mt Shamrock Quarry (WA174) in Pakenham, Victoria (the site) (see **Attachment 1- Figure 1**).

This (2019) review aims to meet selected requirements of the Mt Shamrock Quarry Environmental Management Plan (Holcim, 2015)¹ (EMP).

Groundwater monitoring locations included on Appendix 11- Figure 1 in the EMP were replaced in October 2014 to cater for changing pit extent and areas inundated with water, and a revised groundwater monitoring network now exists to replace bores lost (refer to **Attachment 1- Figure 2** for current groundwater monitoring bore locations).

The objective of the groundwater monitoring and assessment detailed in Section 2.4.3 of the EMP is:

- To ensure that water discharged from the Quarry does not affect the beneficial uses of the receiving waters; and
- To assess any long-term trends in groundwater levels.

To meet these objectives, the EMP includes the following requirements;

- Water level gauging will be conducted quarterly, and an annual evaluation undertaken, to determine how the groundwater levels respond to the following:
 - Seasonal rainfall changes;
 - Extension of the quarry;
 - Revegetation to parts of the plateau surface; and
 - Progressive rehabilitation of quarry.
- Properties surrounding the quarry will be regularly assessed to confirm that the assessed beneficial uses of groundwater (in accordance with SEPP (Waters)) on the properties is supported by actual practices; and
- Visual inspections of springs as per Section 2.5.4 of the EMP.

2.0 Scope

The scope of works undertaken to meet the requirements of the EMP was the following:

- Quarterly gauging of standing water levels (SWLs) of six groundwater bores, between January 2019 and December 2019. Results of the gauging have also been provided to Holcim post every gauging event;
- Biannual assessment of 10 springs or seepages, including;

¹ Pakenham Quarry Environmental Management Plan, version 3: August 2015. prepared by Holcim (Australia) Pty Ltd

- site walkover to visually assess the condition of each spring;
- Collection of supporting photographs at each spring location;
- Collection of field parameters electrical conductivity (EC - $\mu\text{S/cm}$), pH, temperature ($^{\circ}\text{C}$), redox potential (Eh - mV) and dissolved oxygen (DO – mg/L) at each spring location; and
- Provision of this report including an assessment of how groundwater levels respond to the following;
 - Seasonal rainfall changes;
 - Extension of the quarry, revegetation to parts of the plateau surface and progressive rehabilitation of the quarry (through reviewing provided plans indicating any quarterly changes in the extent of the quarry, revegetation and rehabilitation of the quarry completed at the time of groundwater level monitoring);
 - Comparison of current EC data against historical data collected from previous spring monitoring events, which date back to February 2001; and
 - Review of historical data and discussion of results with respect to potential impacts on beneficial uses.

3.0 Background

The site is located on Mt Shamrock Rd, approximately 5km north of the Pakenham township and 65km south-east of the Melbourne CBD. The surrounding land is predominantly used for agricultural purposes.

Topographically, the Site is located at the southern end of an elevated, basalt plateau, which is aligned in an approximate north-south orientation.

Toomuc Valley Road and Toomuc Creek run along the western edge of the plateau, while Pakenham Road is aligned to the south and east of the site.

The site sits at the southern end of a basalt ridgeline (Older Volcanics) which forms one continuous unconfined fracture rock aquifer along the 4 km ridgeline. The basalt overlies Palaeozoic basement, with a thin veneer of unconsolidated Werribee Formation sediments between in some locations. The basalt aquifer is limited in lateral extent by the nature of the valley fill basalt flow.

4.0 Monitoring Networks

4.1 Groundwater Bore Network

Six groundwater monitoring bores (MB01, MB02, MB04, MB03 and MB05 and MB06); formed the original groundwater monitoring bore network for the site. The bores were drilled installed by KH Adams and Sons Drilling Pty Ltd between 6 and 14 March 2001. These bores were drilled at four locations around and within the quarry to provide spatial coverage across the site. At two locations, two bores were constructed into different formations (Older Volcanics & Werribee Formation) to allow for groundwater comparison between the aquifer units.

Two bores (MB02 and MB04) that were located at the base of the pit were damaged in 2008 and subsequently replaced March 2009. The replacement bores (MB02a and MB04a) were installed approximately 50 metres from the original bores however, the quarterly monitoring event in August 2009 revealed the integrity of MB04a had been compromised with a blockage at 6.4 metres below the top of the PVC casing.

The two replacement groundwater bores, MB02a and MB04a, and bores MB03 and MB05 were then removed during the 2012 stripping campaign.

Subsequently, four additional bores were installed (MB02b, MB03b, MB04b and MB05b) in October 2014² to replace the bores historically lost during stripping to restore the monitoring network to be in compliance with the EMP.

² Documented in URS Australia Pty Ltd, December 2014. *Drilling of Groundwater Bores- Mt Shamrock Quarry, Pakenham, October 2014*. Prepared for Holcim (Australia) Pty Ltd

In June 2016, the casings of bores MB02b and MB04b were extended, and damaged in the process of overburden placement in the area. These bores were subsequently decommissioned and replacement bores were installed in January 2017 as MB02c and MB04c.

The bore network gauged during 2019 is presented on **Attachment 1- Figure 2. Table 1 (Attachment 2)** summarises the bore locations, screened interval and aquifer, as monitored during 2019.

4.2 Springs

Ten springs³ surrounding the site have been identified in previous investigations and form part the ongoing monitoring of potential effects from quarry dewatering operations.

The occurrence of the springs is interpreted as being the result of outcropping saturated Werribee Formation sediments (comprising silts, clays and sands) which allow groundwater to discharge to the surface, after rainfall recharge through the overlying basalts.

It is noted that during the 2014 survey two of the mapped springs (SP09 & SP10) were not considered to be discrete groundwater discharge points due to significant surface water and seepage influences and/or changes in topography and infrastructure at the site, however monitoring at these locations has continued and potential seeps have been identified in SP09 area post 2014. The locations of all mapped seepages/ springs are presented in **Attachment 1- Figure 3.**

5.0 Assessment of beneficial uses

The State Environmental Protection Policy (SEPP) (Waters) (2018) sets the regulatory framework for the assessment and management of surface water and groundwater. The SEPP (Waters) is a revision of the SEPP (Waters of Victoria (2003) which was referenced the site EMP.

The aim of the SEPP (Waters) is to maintain surface water quality sufficient to protect existing and potential beneficial uses of surface waters throughout Victoria.

The SEPP (Waters) and its schedules define the surface waters at the site as belonging to the *Rivers and Streams: Central foothills and coastal plains* segment.

The beneficial use of groundwater, in Victoria, is defined by the salinity of the water. Table 1 summarises the Protected Beneficial Use segments, defined by a waters' salinity, as set out by the SEPP (Waters):

Table 1 SEPP (Waters) - Protected Beneficial Uses of the Segments

Beneficial Use	Segments (mg/L TDS)						
	A1 (0-600)	A2 (601- 1,200)	B (1,201- 3,100)	C (3,101- 5,400)	D (5,400 - 7,100)	E (7,101- 10,000)	F (> 10,001)
Water dependent ecosystems and species							
Potable water supply	Desirable						
	Acceptable						
Potable mineral water supply							
Agriculture and irrigation (irrigation)							
Agriculture and irrigation (stock watering)							
Industrial and commercial							
Water-based recreation (primary contact recreation)							
Traditional Owner cultural values							

³ A spring is defined as a groundwater discharge or "exit" point

Beneficial Use	Segments (mg/L TDS)						
	A1 (0-600)	A2 (601- 1,200)	B (1,201- 3,100)	C (3,101- 5,400)	D (5,400 - 7,100)	E (7,101- 10,000)	F (> 10,001)
Cultural and spiritual values							
Buildings and structures							
Geothermal properties							

Historical observations of salinity at the springs show a range from 149 to 2,808 mg/L as TDS (see **Attachment 3 - Table 3**). Spring salinity is considered to be a combination of runoff, interflow and groundwater discharge, thus groundwater salinity is likely diluted in these measurements.

A groundwater resource report, generated from Victorian Department of Environment, Land, Water and Planning notes the quarry lies within the Westernport groundwater catchment. Water table salinity is noted to range from 1001 – 3500 mg/L (TDS). Groundwater bore development records, associated with drilling of groundwater monitoring bores at the quarry report groundwater salinity to range between 1,140 and 2,318 mg/L (see **Attachment 2 - Table 5**), which is consistent with the groundwater resource report.

This assessment indicates the groundwater quality at the Site can be classified as ‘Segment B’. Given the current local activities in the area, consideration of the beneficial use of groundwater and the level of protection has been provided:

- **Water dependent ecosystems and species:** Groundwater is known to feed a number of nearby springs in the area (as discussed in Section 0), which feed nearby surface water body Kennedy Creek (freshwater aquatic ecosystem). Protection of the ecosystems of the nearby surface water body and local springs are considered a relevant beneficial use.
- **Potable mineral water supply:** No known mineral water supply use occurs in the vicinity of the quarry and this use is not considered relevant as part of this assessment.
- **Agriculture and irrigation (irrigation):** Agricultural farming is known to occur at a number of properties in the area, water from the springs are used as a water supply for irrigation, this beneficial use is considered relevant as part of this assessment.
- **Agriculture and irrigation (stock watering):** Stock and domestic bores are registered in the area and stock grazing is known to occur at a number of properties in the area, water from springs are used as a source of water for stock, and this beneficial use is considered relevant as part of this assessment.
- **Industrial and commercial:** There are no industrial zones in the immediate vicinity of the Site. As such, this beneficial use is not considered relevant for this assessment.
- **Water-based recreation (primary contact recreation):** The downstream receiving water body, Kennedy Creek, is not expected to support primary contact recreation activities due to the size of the water body. However, based on a review of registered groundwater users on the Water Management Information System (WMIS) maintained by DELWP indicates stock and domestic bores are registered within 2km of the quarry. Therefore, these bores could be used to fill dams or pools for swimming. Therefore, this beneficial use has been considered.
- **Traditional Owner cultural values:** This beneficial use relates to cultural and spiritual values held by communities such as baptisms, water-based festivals and cultural celebrations. There are no objectives specified in SEPP (Waters). In the absence of site-specific criteria, the objectives for water dependent ecosystems and species to be protective of the beneficial use of surface water have been considered.
- **Cultural and spiritual values:** This beneficial use relates to the cultural values of Traditional Owners, which may include traditional aquaculture, fishing, harvesting, cultivation of freshwater and marine foods, fish, grasses, medicines and filtration of water holes. There are no objectives specified in

SEPP (Waters). In the absence of site-specific criteria, the objectives for other beneficial uses of surface water to be protective of this beneficial use for surface water in the vicinity of the site, and the objectives for water dependent ecosystems and species to be protective of the beneficial use at the point of groundwater discharge to surface water have been considered.

- **Buildings and structures:** Current land use around the site is agricultural and rural residential. Buildings associated are not expected to have deep footings; this beneficial use is not considered relevant at this time.
- **Geothermal properties:** No known geothermal uses exist in the vicinity of the quarry and this beneficial use is not considered relevant as part of this assessment.

As per the water management flow chart within the EMP, all water collected in the quarry pits is contained and reused on-site or discharged via a v-notch to surface water under licence from EPA. As stated in Section 3.3.6 of the statement from the Minister of Planning on the 2006 Environmental Effects Statement for the quarry expansion, the quarry operations were not expected to impact on groundwater and surface water systems, however groundwater inflows into the pit and the water system may increase the total dissolved solids (TDS) within the water system.

As part of this review, the available water quality (based on field EC collected from the springs) has been reviewed against the water quality guideline criteria for TDS as summarised in Table 2 below.

Table 2 Adopted groundwater beneficial use guidelines

Beneficial use	Adopted guideline
Water dependent ecosystems and species that are:	Rivers and streams: Central foothills and coastal plains (slightly to moderately modified)
Stock Watering	Criteria for Livestock Water Supply: ANZECC (2000) Australian Water Quality Guidelines for Fresh and Marine Water Quality.
Agriculture, Parks and Gardens	Criteria for Irrigation Water Supply: ANZECC (2000) Australian Water Quality Guidelines for Fresh and Marine Water Quality.

5.1 Summary of groundwater beneficial use guideline criteria

The adopted Groundwater Screening Criteria (GSC) are summarised below in Table 3.

Table 3 Groundwater Screening Criteria

Analyte	Maintenance Of Freshwater Ecosystems (90% Protection)	Irrigation	Stock Watering
Salinity (mg/L TDS)	200	Specific to crop species*	4,000#

Livestock watering considers horses, dairy cattle and sheep. Adopted criteria considers loss of production and a decline in animal conditional and health.

*ANZECC (2000) presents a range of acceptable water salinities for variation crops with regard to *Average root zone salinity thresholds*. It is expected that farming crop choice in area would consider the available water salinity (among other climatic factors) and as such the assessment of groundwater as a supply for irrigation should consider more any changing trends in water salinity.

6.0 Results and Discussion

6.1 Groundwater Monitoring

Quarterly groundwater level gauging from the bore network was undertaken by AECOM during 2019.

The historic data set of groundwater elevations for the bore network is presented as **Attachment 2- Table 2**. For simplicity, bores and replacement bores have been plotted as one monitoring location to produce time series hydrographs (**Attachment 3- Chart 1**). Limitations have been noted with the relative level data over time as a number of bores have been replaced overtime, and in some event the elevation of the top of casing has been inferred. These limitations are noted on **Attachment 2- Table 2**.

Overall, despite the replacement and relocation of some of the bores, the relative changes in water levels between monitoring events can still be inferred.

6.1.1 Results

The groundwater levels throughout 2019 have remained within historic water levels. All bores have showed slight increases in water elevation during December 2019 gauging

Relative elevations between pairs of bores installed in the Werribee Formation and the Older Volcanics aquifer (i.e. MB03 and MB05; MB02 and MB04) have had similar groundwater elevations and similar patterns of fluctuating water levels over the monitoring period.

6.1.2 Response to rainfall totals

Rainfall data obtained from the nearest meteorological station with a complete rainfall dataset over the total monitoring period (Dandenong Station number 86224 - refer to **Attachment 2- Table 3**) has recorded data from 1961 and 2019, with the following key points:

- Overall average annual rainfall is approximately 776 mm/ year.
- Since 2001, when groundwater monitoring commenced, rainfall has ranged between 587 mm (2008) and 1,108 mm (2011).
- In 2019 to December, rainfall was just below the current annual average, with 648 mm recorded compared with an average of 710 mm.

Historically rainfall totals were below average between 2002 and 2008 and increasing between 2010 and 2012 (consistent with regional observations). From 2013 to present the annual rainfall has generally fluctuated both above and below the long-term average.

Attachment 3- Chart 2 presents groundwater level data versus monthly rainfall totals. **Chart 3** presents groundwater level data versus Accumulative Monthly Residual Rainfall (AMRR). The plots indicate the following key points:

- Overall there is a good correlation between rainfall totals and groundwater levels, particularly prior to 2005;
- The monitoring bores appear to respond to rainfall trends, with a marked increase in groundwater levels between 2010 and 2011 at the break of drought. Between June 2011 and February 2012, when the pit was submerged, monitored bores (MB01 and MB06) outside of the pit remained stable throughout a continued upward AMRR trend;
- The strongest correlation is in the basalt bores outside the pit, which is believed to reflect the aquifer's better connection to rainfall infiltration;
- Bores screened in the aquifer directly beneath the basalt (Werribee Formation) respond at comparable times and trends, suggesting hydraulic connection; and
- The recent slight increase in groundwater levels observed in December 2019 may be in response to an upward trend in AMRR over winter 2019.

6.1.3 Response to quarry extensions

The following summarises the stripping/extraction campaigns that have taken place since the expansion of the quarry in 2005:

- 2009:
 - An excavation of approximately 50m² to the south west corner (towards MB03 and MB05);
 - An excavation of approximately 100m² to the north (towards MB06);
 - Vegetation and surface material removal of approximately 200m² to the south (west of MB01); and
 - Vegetation and surface material removal of approximately 200m² to the south (east of MB01).
- 2012 - Extension of the western area of the quarry. Material from here was being placed in the northern extent of the quarry.
- 2015 - Further excavation of the southwestern quarry area.
- 2016 - Further excavation of the south western quarry area.
- 2017 - Continued excavation of the quarry in the south-west portion of the site.
- 2018 - Continued excavation in the southwestern area of the quarry.
- 2019 – Removal of overburden in the western portion of quarry (highlighted in **Attachment 5**)

The stripping of the surface materials (overburden) as part of quarrying is potentially increasing rainfall infiltration when more permeable fresh basalt is exposed to surface. This increased infiltration potential and in combination with relatively high rainfall is believed to a key reason for the increase in groundwater levels throughout 2010 and 2011, most notably in MB03 (6.4 m increase) and MB05 (9.3 m increase), as reported in previous reviews, before levels decreased in 2014.

6.1.4 Response to revegetation across plateau surface

Holcim continued rehabilitation works at the quarry in 2019. Previous revegetation efforts in the south east of the quarry were supported with dead vegetation replaced in this area (highlighted in green the aerial photograph in **Attachment 5**).

Progressive rehabilitation works were carried out to the west of previous revegetation efforts in the south. These works took place in the fourth quarter of 2019 and will continue to the west in 2020 (highlighted in yellow in the aerial photograph in **Attachment 5**).

There continues to be no observable trend in levels that can be attributed to revegetation. Revegetation areas are relatively minor in comparison to the overall quarry footprint and any change in infiltration from an increase in evapotranspiration is likely to be minor at this time.

6.1.5 Response to progressive rehabilitation of the quarry

In previous years overburden from the quarry has been placed in the south east of the site. This area has now been extensively revegetated and is undergoing rehabilitation. Through 2018 overburden was placed in the smaller pit to the north east which formerly contained a pond. As of 2018 this pit and the former pond appear to have been infilled (See aerial photograph in **Attachment 5**).

The former pit is located approximately equidistant from bores MB02C, MB04C and MB06. Each bore is approximately 200m from the former pit. No trend or influence due to the filling in of the pit is yet apparent in the gauging data.

Overburden placement as part of the rehabilitation works will likely decrease infiltration and recharge and the shaping of the overburden will likely re-direct runoff. Although rehabilitated areas are comparably minor in relation to the overall quarry footprint, as rehabilitation continues the effect may become more apparent.

6.2 Spring Survey

Historically ten seeps were identified as being groundwater fed springs. A spring survey was completed on 18 July 2019 and 16 December 2019.

Photographs taken for each location during the survey are presented in **Attachment 4**.

Results of the spring survey completed in 2019 are summarised in **Table 5** below. Historical spring parameters are presented in **Table 4-Attachment 2** and a chart of measured EC over time is presented as **Chart 4- Attachment 3**.

Rainfall vs the measured EC is also plotted as **Chart 5- Attachment 3**. We note that when comparing the historical salinity measurements collected at the springs, rainfall can influence the measured EC as some events have been collected in higher rainfall months and saturated ground conditions may dilute the groundwater and therefore reduce the measured salinity.

Table 4 2019 Spring Survey Results

SPRING ID	EC (µS/cm)- July 2019	OBSERVATIONS- July 2019	EC (µS/cm)- December 2019	OBSERVATIONS- December 2019
SP01	1218	Clear, low turbidity, no odour, moderate flow into tank.	1200	Thick vegetation. Flowing water in bin.
SP02	2070	No flow, brown, low turbidity, no odour	2838	Thick grass. Standing water within grass. No visible flow.
SP03	775	Cow in Springs. No odour, grey, low turbidity	812	Tall grass and floating vegetation. No flow.
SP04	Dry	Dry Spring, vegetation healthy though overgrown	Dry	Slightly damp seep observed.
SP05	Dry	Dry Spring, vegetation healthy though overgrown	Dry	Tall vegetation. No damp ground observed.
SP06	417.9	Brown, no odour, low turbidity, boggy	437.5	Standing water. Livestock pugging evident.
SP07	Dry	Dry and no sign of water in valley going towards dam. Large amounts of blackberry plants and some dumped rubbish in valley.	Not Identified	No damp ground observed.
SP08	396.4	Reeds, no odour, low turbidity, clear	631	Standing water in pond. Low flow down slope. Oxidised iron apparent in stream.
SP09	780	Large pond, cloudy/grey no-odour, low turbidity	1231	Wetland. Reeds and other vegetation healthy.
SP10	Dry	Dry. Vegetation healthy	Dry	Damp seep in embankment.

Further spring observations from the December 2019 survey are discussed below:

SP01

SP01 located to the west of the quarry site, provides irrigation and stock water to a number of properties in the local area. In December 2019 the area was observed to be boggy and vegetation in good health.

The spring water EC (1,200 µS/cm) was within the range of EC values reported in previous surveys.

SP02

SP02 located to the west of the quarry, was observed to be a small dam feed by groundwater and surface water runoff from a relatively steep slope above. The area was fenced, with no flow measured.

The dam exhibits instability on the downslope face. It was previously understood that under heavy rainfall, the pond overtops resulting in erosion and instability on the face of the dam. The spring was noted to have the potential to break free of the wall constructed at the location to reduce flow down the slope. A tank is apparently planned to be constructed downgradient from which water is fed to, to reduce stress on the wall.

In December 2019 the spring was noted to be a deep pond with a large amount of overgrown grass. Water was not visible from a distance but when examined closely clear standing water was visible within grass. Although no flow was observed, troughs and tanks in the area were full.

The water EC (2,838 $\mu\text{S}/\text{cm}$) was within the historical range of EC values reported at SP02, with EC continuously higher at SP02 than other spring locations.

SP03

Vegetation in December 2019 was very healthy and the surrounding area boggy. Water was covered in floating vegetation. Flow was not observed.

Measured EC (812 $\mu\text{S}/\text{cm}$) values were within those historically reported (540-1,022 $\mu\text{S}/\text{cm}$). Following an observed spike in EC in 2016 values have stabilised at a lower level since then.

SP04

SP04 located to the north west of the quarry was noted to be overgrown in places. A small depression was observed down topographic gradient of the spring line and slope. The area has been fenced off, preventing livestock access.

In December 2019 a damp seep in exposed soil was observed. No standing or flowing water was present and water quality measurements could not be collected. Vegetation was thicker and greener than the surrounding area.

SP05

In December 2019 the spring was observed to be dry, as it has been since 2009, and water quality measurements could not be collected. Vegetation was taller and thicker than the immediately surrounding area.

SP06

Spring water at SP06 accumulates in a collection pond accessible to livestock, with cattle prints observed. Pool at spring was noted to be stagnant and very boggy. The pool is approximately 15-20m² and up to 0.5m deep. EC was measured as 437.5 $\mu\text{S}/\text{cm}$, within the historical range.

SP07

SP07 located to the north of the quarry has a lower elevation than the other mapped springs. Discharge is towards the bottom of a significant and moderately steep drainage line, indicating that surface water runoff could be a partial contributor to the water logging of the ground surface. This location has been intermittently dry or had very little flow in some of the previous events.

No spring or damp seep could be identified at SP07 in December 2019.

SP08

Spring is a wetland with a lot of reeds. EC was measured at 631 $\mu\text{S}/\text{cm}$, within the historic range but the EC at this spring shows high variability since observations began in 2001. A low amount of flow was observed down the slope from the wetland and oxidised orange precipitate was present.

SP09

An access road was constructed in the vicinity of SP09 in 2014 and the access road includes a culvert installed underneath that diverts water away from the quarry. The topography of the area was noted to be slightly altered during the construction.

A pond of water was observed down gradient of the former SP09 location that is most likely a combination of seepage and surface water run-off, and is unlikely to have a significant groundwater contribution at the location observed.

In December 2019 the wetland was observed to have standing water and vegetation was thick and healthy. EC was measured as 1,231 $\mu\text{S}/\text{cm}$, within the historic range.

SP10

Similar to SP09, the monitoring point, SP10, was noted to be changed by the previous construction of an access road and culvert.

Monitoring has continued and the area has been recorded as dry since 2014, including in the recent December 2019 monitoring event when only a damp seep in the exposed embankment was observed.

6.2.1 Spring changes in comparison to rainfall totals and quarry development

The spring EC measurements have been plotted against the rainfall data (refer to **Table 3-Attachment 2**). Rainfall is slightly less than average in 2019, as rainfall, in part is expected to influence the observations at the spring sites. In 2019, EC measurements have varied at each location. In general, at some spring locations, the EC is higher during the summer monitoring events, expected to be commiserate with lower rainfall and may be more reflective of seepage. Measured EC has been within historical ranges at each spring, with EC consistently highest at Spring 2 and EC at Spring 2 typically higher compared to the winter spring monitoring events.

It appears that there could be lower flow in the springs recent years based on the continued dryness at Spring 4, 5 and 7 and the apparently lower flow at Spring 1. This may weakly correlate with declining AMRR since 2013, similar to the declining flows/ dry springs that were observed in 2009 before the drought broke.

However, as discussed in previous reviews Spring 5 has typically been dry since 2009, and Spring 4 Spring 9 and Spring 10 have been influenced by creation of dams/ wetlands in the vicinity of the springs.

6.3 Assessment of Impacts to Beneficial Use

Quarrying operations at the site began mid-1970s, monitoring of groundwater levels and of spring water quality (electrical conductivity and other field parameters) has been conducted at the Site since 2001.

As an overview, water is managed at the site via a pump and containment system around the site, with water that is collected in north and south pits, used on site for either dust suppression or in the processing plant.

For management of excess water, Holcim hold an off-site discharge licence from EPA for the discharge of water to Kennedy Creek via the v-notch at Donazzan's Dam.

As part of this licence, Holcim undertake testing during discharge for the parameters defined within the licence, including flow and water quality- primarily TDS. Monitoring of Off-site discharge to Kennedy Creek is undertaken weekly during discharge for water quality and flow as per the EPA licence and Holcim maintain records.

Should quality not comply with the limits set in the EPA licence, then discharge does not occur. Therefore, the impacts on the creek system (beneficial use of maintenance of ecosystems) is considered to be met.

As discussed in Section 6.1.1 observations of groundwater levels continuing to remain within historic measurements and indicates that the access to groundwater for the purpose of beneficial uses outlined in Section 4.0 has not been impinged by decreasing water levels. Further, groundwater seepage and flow has continued to be observed in the springs since the commencement of monitoring. Therefore, where surrounding land users access water, in particular for stock watering, this does not appear to be affected by quarry operations.

Quarry operations are not expected to impact on surrounding groundwater quality, as local groundwater flow is inferred to be towards the pit, and any inflows are captured as part of the on-site water management network. Groundwater quality monitoring is not required by the EMP, as discussed above the key indicators of impact to surrounding beneficial users are flows at the spring monitoring locations.

A brief review of available water quality records for the site including groundwater bore development records (2014 – 2017), and field measurements at the springs indicate that TDS (based on field measured EC readings) remains within the range as defined by Segment B SEPP (Waters) (1001 – 3500 mg/L), suggesting that groundwater is suitable for the beneficial uses noted in Section 4.0.

Inspection of the data presented in **Attachment 3 - Chart 7** shows a relatively stable salinity at most springs since monitoring commenced. Spring number 2 (SP02) has a higher salinity than other springs. Groundwater quality measured in bore development and expressed by the springs is considered suitable for livestock watering and has been since monitoring commenced.

Groundwater quality observed during bore development suggests that salinity varies and exceeds the adopted criteria for maintenance of ecosystems. This is also the case for water quality monitored at adjacent springs. However, this is considered to be the background quality within the aquifers.

Groundwater discharge via springs is considered a natural hydraulic process in the area and as such slightly saline groundwater expression from some springs in the area is considered natural and not an impediment to ecosystem maintenance given the dilution occurring at the spring sites. Further, the key beneficial use of the surface water environment, is managed via the EPA licence as discussed above, whereby, water quality parameters must be met prior to discharge.

Suitability of groundwater for crop irrigation will depend on the crop chosen, based on average root zone salinity thresholds presented in Table 4.2.5 of the ANZECC (2000) guidelines, water quality is likely suitable for most/many field crops fruits, pastures and vegetables, with the exception of some low tolerant species. The stable trend observed in the spring data shows that suitability for crop irrigation has not degraded since monitoring commenced in 2001 and is not likely impeding adjacent land holder beneficial use. TDS is also below the adopted criteria for stock watering.

Based on the available data, the water quality and spring flow observations suggest that recent activities (post 2001) at the quarry have had not impacted on the current surrounding beneficial uses of groundwater.

7.0 Summary

The key conclusions of this annual review are as follows:

- Groundwater levels have remained within the range observed in the last two years of monitoring. A slight increase in water level was seen at all bores in the December 2019 monitoring round.
- Salinity (based on EC levels) of the springs monitored were well within historical levels.
- SP05 was dry, as has been noted since at least 2009, with SP10, also noted to be dry since 2014, due to changed site conditions. SP04 continued to be dry as it has been since 2018.
- In summary, the monitoring collected over the 2019 monitoring period does not show any significant changes from based on quarry operations.
- Based on the available data, the water quality and spring flow observations suggest that recent activities (post 2001) at the quarry have had not impacted on the current surrounding beneficial uses of groundwater.

•

Yours faithfully

Chris Aitken
Graduate Hydrogeologist
chris.aitken@aecom.com

Amie Cullum
Associate Director-Environmental Scientist
amie.cullum@aecom.com

Mobile: +61 439 032 421
Direct Dial: +61 3 9653 8061
Direct Fax: +61 3 9654 7117

Attachments

Attachment 1 Figures

Attachment 2 Tables

Attachment 3 Charts

Attachment 4 Site photographs

Attachment 5 2019 Areas of Overburden Placement and Revegetation

Limitations

AECOM Services Pty Limited (AECOM) has prepared this report in accordance with the usual care and thoroughness of the consulting profession for the use of Holcim Australia Pty Ltd and only those third parties who have been authorised in writing by AECOM to rely on this Report.

It is based on generally accepted practices and standards at the time it was prepared. No other warranty, expressed or implied, is made as to the professional advice included in this Report.

It is prepared in accordance with the scope of work and for the purpose outlined in the contract dated 13 June 2018.

Where this Report indicates that information has been provided to AECOM by third parties, AECOM has made no independent verification of this information except as expressly stated in the Report. AECOM assumes no liability for any inaccuracies in or omissions to that information.

This Report was prepared in February 2019 and is based on the conditions encountered and information reviewed at the time of preparation. AECOM disclaims responsibility for any changes that may have occurred after this time.

This Report should be read in full. No responsibility is accepted for use of any part of this report in any other context or for any other purpose or by third parties. This Report does not purport to give legal advice. Legal advice can only be given by qualified legal practitioners.

Except as required by law, no third party may use or rely on this Report unless otherwise agreed by AECOM in writing. Where such agreement is provided, AECOM will provide a letter of reliance to the agreed third party in the form required by AECOM.

To the extent permitted by law, AECOM expressly disclaims and excludes liability for any loss, damage, cost or expenses suffered by any third party relating to or resulting from the use of, or reliance on, any information contained in this Report. AECOM does not admit that any action, liability or claim may exist or be available to any third party.


Except as specifically stated in this section, AECOM does not authorise the use of this Report by any third party.

It is the responsibility of third parties to independently make inquiries or seek advice in relation to their particular requirements and proposed use of the site.



Attachment 1

Figures

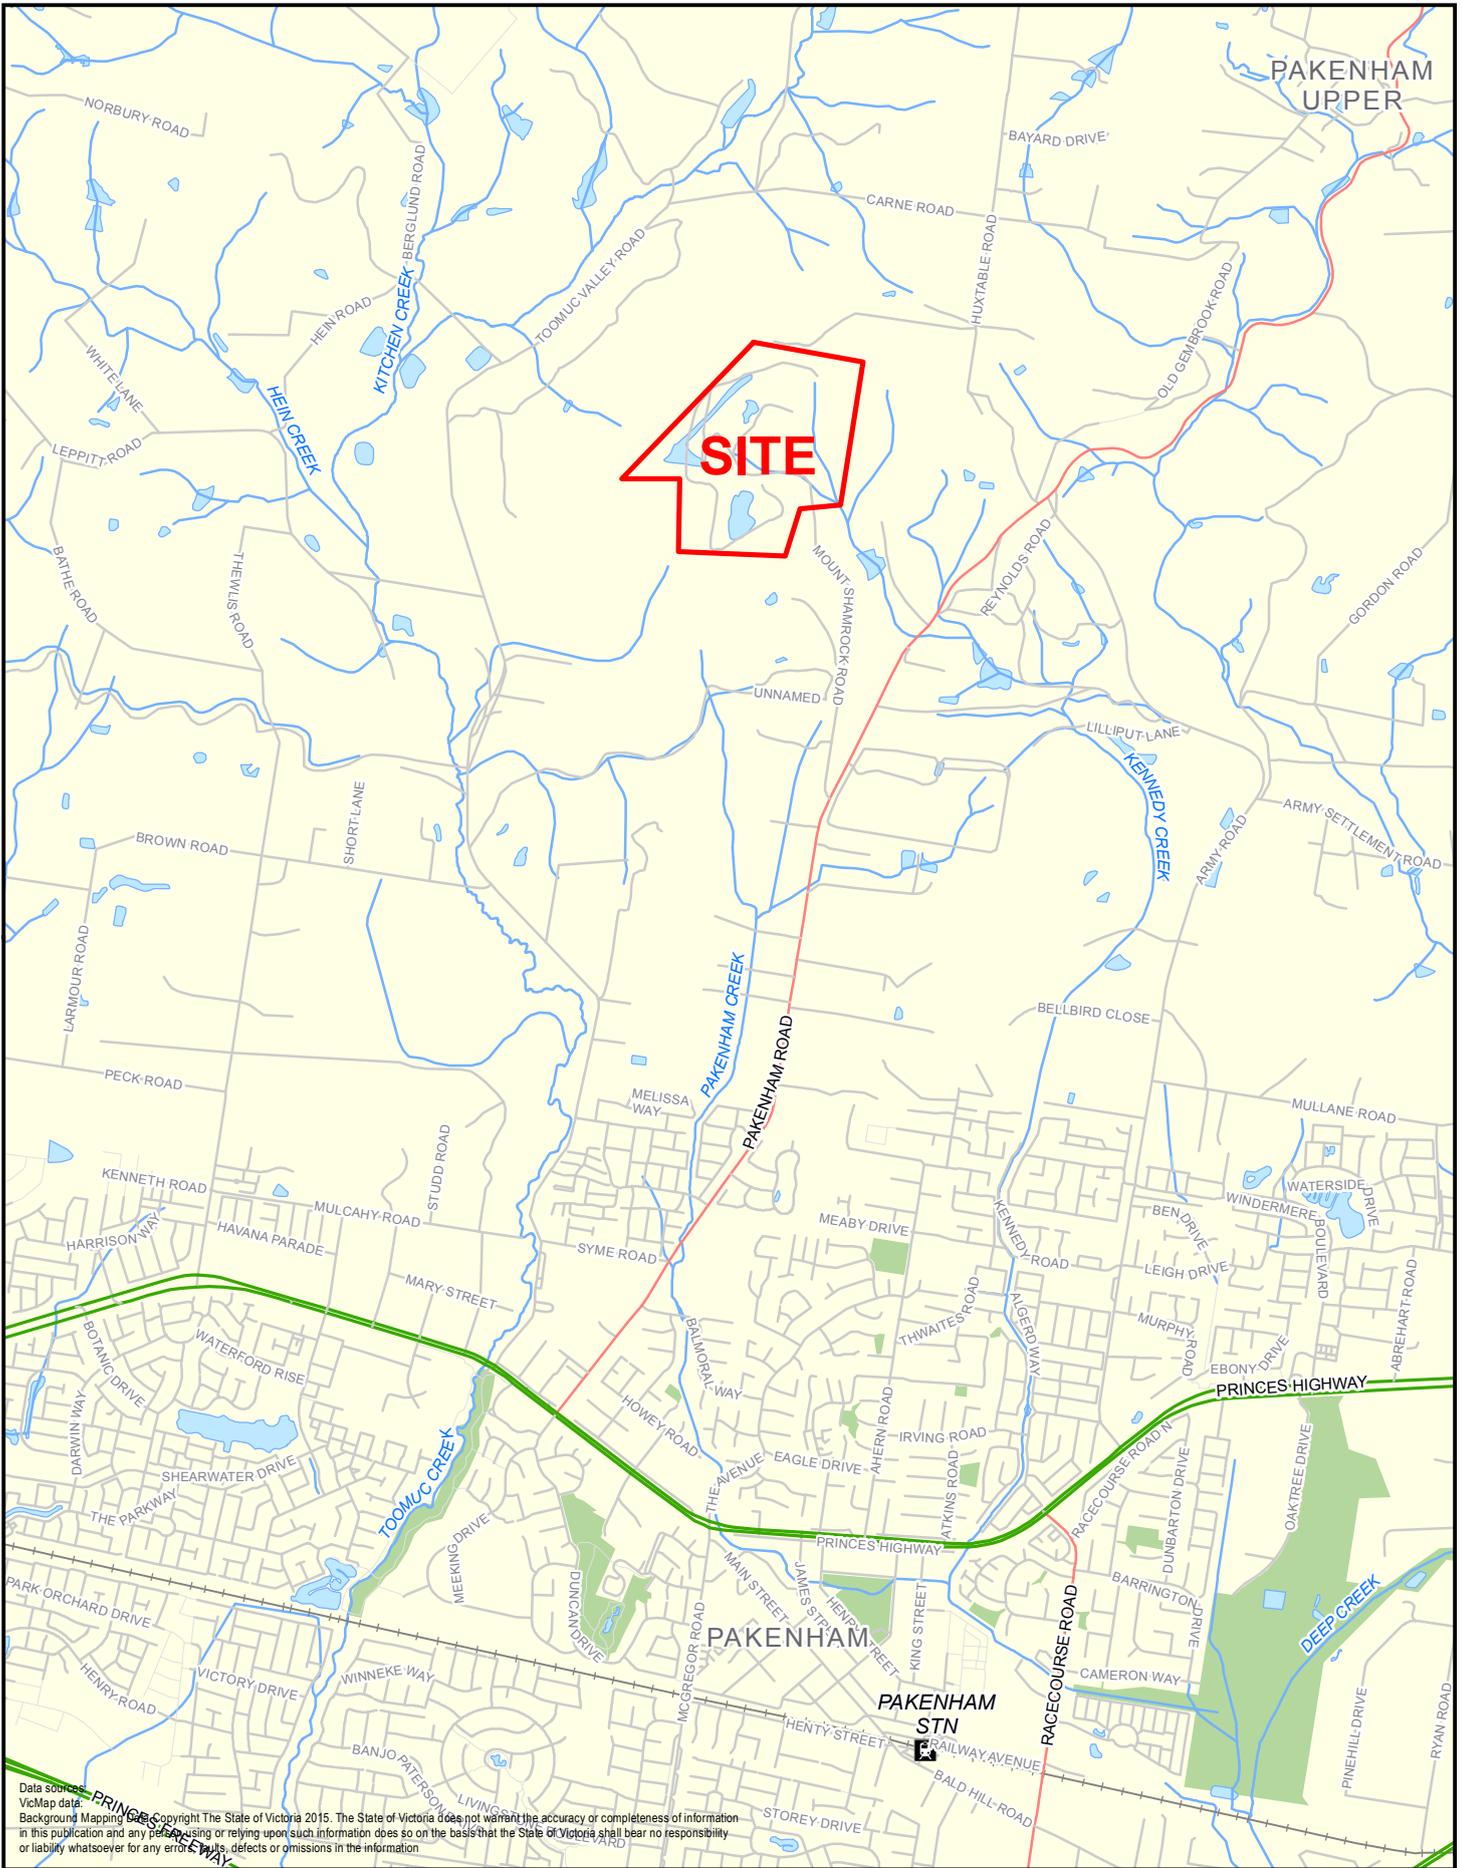

Data Source: VicMap data. Background Mapping: Copyright The State of Victoria 2015. The State of Victoria does not warrant the accuracy or completeness of information in this publication and any person using or relying upon such information does so on the basis that the State of Victoria shall bear no responsibility or liability whatsoever for any errors, faults, defects or omissions in the information.

PROJECT ID 60451395
 CREATED BY DJB
 LAST MODIFIED T SMITH 05 FEB 2019 www.aecom.com

DATUM GDA 1994, PROJECTION MGA ZONE 55
 0 270 540 810 1,080
 metres
 1:35,000 when printed at A4

Legend

— Site Boundary

SITE LOCATION PLAN

Holcim (Australia) Pty Ltd
 Groundwater and Spring Review
 Mt Shamrock Road, Pakenham

Figure
1



Map source:
 ViMap data:
 Background Mapping Data Copyright The State of Victoria 2015. The State of Victoria does not warrant the accuracy or completeness of information in this publication and any person using or relying upon such information does so on the basis that the State of Victoria shall bear no responsibility or liability whatsoever for any errors, faults, defects or omissions in the information.

PROJECT ID 60451395
 CREATED BY DJB
 LAST MODIFIED T SMITH 05 FEB 2019 www.aecom.com

AECOM

DATUM GDA 1994, PROJECTION MGA ZONE 55

0 40 80 120 160
 metres

1:7,500 when printed at A4

Legend

- ⊕ Monitoring Bore Location
- ⊕ Monitoring Bore (Decommissioned)

NOTE:
 * Location not surveyed- approximate only.

GROUNDWATER MONITORING LOCATIONS

Holcim (Australia) Pty Ltd

Groundwater and Spring Review

Mt Shamrock Road, Pakenham

Figure 2



Data sources:
 VicMap data:
 Background Mapping Data Copyright The State of Victoria 2015. The State of Victoria does not warrant the accuracy or completeness of information in this publication and any person using or relying upon such information does so on the basis that the State of Victoria shall bear no responsibility or liability whatsoever for any errors, faults, defects or omissions in the information

<p>PROJECT ID 60451395 CREATED BY SW LAST MODIFIED 19 DEC 2019</p>  <p>www.aecom.com</p>  <p>DATUM GDA 1994, PROJECTION MGA ZONE 55</p>  <p>1:8,000 when printed at A4</p>	<p>Legend</p> <ul style="list-style-type: none"> ● Spring Location 812 EC (uS/cm) - December 2019 	<p>SPRING LOCATIONS AND ELECTRICAL CONDUCTIVITY RESULTS</p> <p>Holcim (Australia) Pty Ltd</p> <p>Groundwater Review 2019</p> <p>Mt Shamrock Road, Pakenham</p> <p style="text-align: right;">Figure 3</p>
---	--	---



Attachment 2

Tables

Table 1- Current Monitoring Bore Network
 Mt Shamrock Quarry, Pakenham

Well ID	Installation Date	Top of Well Casing	Eastings (AMG)	Northings (AMG)	Top of Well Screen		Bottom of Well Screen		Bottom of Well Screen	Aquifer	Status
		mAHD ¹			mbgl	mAHD	mbgl	mAHD			
MB01	07-Mar-01	216.54	366135.13	5789516	67	149.54	72.5	144.04	WERRIBEE FORMATION	Operational	
MB2a	13-Mar-09				14		17		WERRIBEE FORMATION	Destroyed	
MB02b	22-Oct-14	174.64	366344.3	5790135.03	8.8	165.84	11.8	162.84	WERRIBEE FORMATION	Decommissioned	
MB02c	17-Jan-17	191.68	366232.07	5790211.78	33.77	157.91	36.77	154.91	WERRIBEE FORMATION	Operational	
MB03	06-Mar-01	229.69	365817.18	5789879.64	71	158.69	77	152.69	WERRIBEE FORMATION	Destroyed	
MB03b	24-Oct-14	209.9	365739.25	5790087.04	49	160.9	52	157.9	WERRIBEE FORMATION	Operational	
MB04a	13-Mar-09				8.7		11.7		OLDER VOLCANICS	Destroyed	
MB04b	22-Oct-14	174.7	366342.72	5790133.59	1	173.7	1.5	173.2	OLDER VOLCANICS	Decommissioned	
MB04c	17-Jan-17	191.84	366233.33	5790213.41	30.4	161.44	30.9	160.94	OLDER VOLCANICS	Operational	
MB05	06-Mar-01	229.84	365820.83	5789879.07	51	178.84	57	172.84	OLDER VOLCANICS	Decommissioned	
MB05b	27-Oct-14	209.55	365736.94	5790087.88	40	169.55	46	163.55	OLDER VOLCANICS	Operational	
MB06	13-Mar-01	219.56	366321.06	5790488.4	44	175.56	50	169.56	OLDER VOLCANICS	Operational	

mAHD meters above Australian Height Datum

AMG Australian Map Grid

Table 2- Historic Groundwater Elevation Monitoring Data
Mt Shamrock Quarry, Pakenham

Date	MB01 (Werribee)- Relative Water Level mAHD	MB02, MB2a, MB2b, Mb2c (Werribee)- Relative Water Level mAHD	MB03, MB3b (Werribee) - Relative Water Level mAHD	MB04, MB4a, MB4b, MB4c (Older Volcanics)- Relative Water Level mAHD	MB05, MB05b (Older Volcanics)- Relative Water Level mAHD	MB06 (Older Volcanics)- Relative Water Level mAHD
30/3/01	175.84	163.35	180.16	163.55	183.76	177.84
6/4/01	#N/A	163.35	#N/A	163.39	#N/A	#N/A
7/5/01	175.75	163.63	180.26	163.56	183.55	177.21
24/5/01	175.94	163.67	180.40	163.55	183.46	177.00
31/5/01	175.92	163.62	180.32	163.57	183.36	176.87
7/6/01	175.96	163.63	180.33	163.50	183.34	176.87
14/6/01	176.04	163.70	180.32	163.75	183.30	176.77
21/6/01	176.01	163.87	180.25	163.68	183.23	176.78
28/6/01	175.95	163.75	180.18	163.51	183.04	176.62
5/7/01	176.00	163.73	180.23	163.48	183.13	176.61
12/7/01	175.96	163.73	180.14	163.59	183.02	176.56
19/7/01	175.95	163.75	180.11	163.56	182.95	176.52
26/7/01	175.95	163.74	180.05	163.45	182.87	176.54
2/8/01	175.93	163.76	180.02	163.63	182.85	176.52
9/8/01	175.94	163.75	180.05	163.48	182.84	176.46
16/8/01	175.91	163.57	180.00	163.45	182.75	176.51
23/8/01	175.86	163.85	179.94	163.77	182.68	176.33
30/8/01	175.86	163.78	179.91	163.60	182.60	176.38
6/9/01	175.74	163.82	179.94	163.53	182.53	176.38
13/9/01	175.91	163.89	179.82	163.53	182.55	176.36
20/9/01	175.89	163.87	179.75	163.46	182.50	176.51
27/9/01	175.89	163.75	179.70	163.54	182.55	176.56
4/10/01	175.89	163.64	179.78	163.53	182.65	176.68
11/10/01	175.93	163.63	179.80	163.55	182.69	176.78
18/10/2001	175.94	163.60	179.82	163.60	182.75	176.79
25/10/2001	175.95	163.66	179.82	163.61	182.79	176.80
01/11/2001	175.93	163.99	179.75	163.55	182.77	176.74
08/11/2001	175.93	163.92	179.72	163.53	182.76	176.71
15/11/2001	175.93	163.95	179.70	163.57	182.73	176.69
22/11/2001	175.98	164.00	179.74	163.50	182.78	176.70
30/11/2001	176.03	163.89	179.74	163.44	182.77	176.71
07/12/2001	176.00	163.79	179.94	163.58	182.79	176.65
20/12/2001	176.01	163.66	179.63	163.06	182.70	176.67
11/01/2002	176.00	163.47	179.48	163.03	182.56	176.61
18/01/2002	175.99	163.46	179.47	163.03	182.54	176.62
25/01/2002	175.96	163.42	178.99	163.37	182.44	176.50
01/02/2002	175.97	163.41	179.29	163.02	182.41	176.46
11/02/2002	175.94	163.59	179.20	163.43	182.35	176.32
20/02/2002	175.85	163.52	179.17	163.40	182.27	176.29
28/02/2002	175.81	163.32	179.11	163.08	182.14	176.17
11/06/2002	175.61	163.13	178.41	162.54	180.94	#N/A
16/10/2002	175.33	163.32	177.60	163.20	179.77	175.02
30/01/2003	175.02	162.79	176.81	162.14	178.77	174.59
27/06/2003	174.54	163.06	175.75	162.65	177.55	174.06
09/07/2003	174.44	163.08	175.54	162.44	177.44	174.00
11/09/2003	174.77	163.40	175.28	162.71	177.06	174.04
01/11/2003	#N/A	162.93	175.06	162.87	177.10	176.52
27/02/2004	174.64	162.37	175.51	162.66	177.99	175.87
19/05/2004	174.51	162.98	175.90	162.76	178.74	175.01
21/07/2004	175.00	163.55	177.20	162.89	178.85	175.02
03/09/2004	175.22	163.70	176.72	163.11	180.55	176.44
10/11/2004	176.32	163.60	179.57	163.32	182.29	179.90
13/01/2005	177.30	163.49	181.33	162.89	188.74	179.78
20/03/2008	170.70	164.01	174.59	163.46	177.18	172.31
18/07/2008	169.00	164.52	174.04	163.53	176.59	172.35
29/09/2008	171.77	164.62	173.59	163.53	174.92	172.26
22/12/2008	173.10	Bore Destroyed	173.29	Bore Destroyed	175.50	171.81
02/04/2009	173.54	Installation and monitoring of MB2a commences	172.59	Installation and monitoring of MB4a commences	174.14	171.56
18/06/2009	174.04	178.60	172.99	177.00	174.84	171.56
18/08/2009	174.94	178.60	173.09	177.70	174.84	171.56
29/09/2009	175.54	178.80	172.99	178.66	174.74	171.46
13/12/2009	176.10	178.84	173.29	179.00	174.94	170.86
11/03/2010	176.05	179.14	173.31	179.15	173.92	171.44
15/06/2010	176.19	179.03	173.35	179.53	174.89	171.46
03/08/2010	176.34	179.31	173.51	180.10	175.02	171.43
25/11/2010	177.34	180.57	175.27	181.58	178.79	172.36
26/01/2011	177.24	182.38	178.07	181.30	177.54	173.46
01/03/2011	178.31	180.40	176.49	183.60	182.49	173.92
14/06/2011	178.25	Bore Destroyed	179.91	Bore Destroyed	184.35	174.85
08/09/2011	176.44	#N/A	Bore Destroyed	#N/A	Bore Destroyed	174.76
14/12/2011	173.64	#N/A	#N/A	#N/A	#N/A	#N/A
14/01/2012	173.74	#N/A	#N/A	#N/A	#N/A	176.56
29/02/2012	174.74	#N/A	#N/A	#N/A	#N/A	176.28
12/04/2012	175.44	#N/A	#N/A	#N/A	#N/A	175.81
10/05/2012	175.34	#N/A	#N/A	#N/A	#N/A	175.66
09/07/2012	174.94	#N/A	#N/A	#N/A	#N/A	175.83
03/08/2012	172.84	#N/A	#N/A	#N/A	#N/A	175.81
12/09/2012	174.94	#N/A	#N/A	#N/A	#N/A	175.86
10/10/2012	175.04	#N/A	#N/A	#N/A	#N/A	175.96
14/02/2013	175.19	#N/A	#N/A	#N/A	#N/A	176.06
12/03/2013	175.08	#N/A	#N/A	#N/A	#N/A	176.30
08/04/2013	175.04	#N/A	#N/A	#N/A	#N/A	175.81
04/06/2013	174.89	#N/A	#N/A	#N/A	#N/A	176.06
02/07/2013	174.54	#N/A	#N/A	#N/A	#N/A	175.81
05/08/2013	172.79	#N/A	#N/A	#N/A	#N/A	177.91
09/09/2013	175.04	#N/A	#N/A	#N/A	#N/A	175.81

Table 2- Historic Groundwater Elevation Monitoring Data
Mt Shamrock Quarry, Pakenham

Date	MB01 (Werribee)- Relative Water Level mAHD	MB02, MB2a, MB2b, Mb2c (Werribee)- Relative Water Level mAHD	MB03, MB3b (Werribee) - Relative Water Level mAHD	MB04, MB4a, MB4b, MB4c (Older Volcanics)- Relative Water Level mAHD	MB05, MB05b (Older Volcanics)- Relative Water Level mAHD	MB06 (Older Volcanics)- Relative Water Level mAHD
07/10/2013	175.04	#N/A	#N/A	#N/A	#N/A	175.81
12/11/2013	172.47	#N/A	#N/A	#N/A	#N/A	177.41
10/12/2013	174.29	#N/A	#N/A	#N/A	#N/A	175.44
13/01/2014	175.04	#N/A	#N/A	#N/A	#N/A	175.91
11/02/2014	175.04	#N/A	#N/A	#N/A	#N/A	178.11
10/03/2014	176.04	#N/A	#N/A	#N/A	#N/A	176.96
08/04/2014	174.04	#N/A	#N/A	#N/A	#N/A	175.32
15/05/2014	174.39	#N/A	#N/A	#N/A	#N/A	175.46
10/06/2014	175.04	Installation and monitoring of MB2b commences	Installation and monitoring of MB3b commences	Installation and monitoring of MB4b commences	Installation and monitoring of MB5b commences	176.23
19/02/2015	No access	No access	170.92	No access	171.28	No access
28/03/2015	172.51	173.15	170.61	173.09	170.98	174.88
25/05/2015	172.52	173.29	170.17	173.08	170.52	174.34
23/06/2015	172.69	173.29	170.20	173.37	170.56	174.30
23/07/2015	172.46	173.29	170.08	173.21	170.42	174.12
31/08/2015	172.25	173.45	169.92	173.26	170.26	173.84
29/09/2015	172.12	173.48	169.98	173.32	170.32	173.77
30/10/2015	171.86	173.30	170.04	173.20	170.39	173.71
27/11/2015	171.56	173.21	169.92	173.11	170.26	173.59
17/12/2015	171.47	173.10	169.87	173.03	170.22	173.53
26/02/2016	173.07	172.70	169.46	172.85	169.78	173.20
17/06/2016	170.98	173.24	169.22	Dry, bore damaged (potentially error in location)	169.54	172.87
28/09/2016	171.00	173.24	170.36	172.66	170.79	172.92
15/12/2016	171.06	177.36	170.78	172.28	171.21	173.50
16/01/2017		Bore decommissioned and replaced with MB02C		Bore decommissioned and replaced with MB04C		
08/05/2017	171.70	172.08	170.10	171.96	170.50	173.38
09/08/2017	171.58	171.62	170.24	171.46	170.69	172.99
09/10/2017	171.33	171.52	170.92	171.26	171.44	171.84
08/12/2017	171.11	171.18	170.69	170.97	171.16	172.70
12/04/2018	170.62	171.32	170.26	170.82	170.70	172.45
03/07/2018	169.875	171.1	170.92	170.89	171.515	172.2
09/10/2018	169.717	171.165	171.71	170.99	172.313	172.035
08/01/2019	169.617	171.235	172.03	171.00	172.565	171.898
05/04/2019	169.187	170.385	170.39	170.30	170.818	171.755
18/07/2019	168.769	170.635	171.58	170.70	172.139	171.712
16/12/2019	169.165	171.686	172.52	171.81	173.042	172.047

#NA No gauging data available

Italics RL mAHD estimated from client provided GPS data

Notes on gauging:

Groundwater level gauging was not undertaken between May 2005- January 2008;

All bores inside the pit were submerged between June 2011 and February 2012;

Bores MB02a and MB04b were not surveyed to relative levels, and therefore relative elevations from gauging data measured between June 2009- March 2011 is based on the TOC elevation collected by handheld GPS.

A blockage in MB04a at 6.2mbgl was identified in August 2009, not long after replacement. This is inferred to have impacted the gauging data collected between August 2009- end of 2011, when the bore was removed in the stripping campaign;

The PVC of bores MB02b and MB04b were extended during placement of overburden in mid-2016 by around 12 metres, however were damaged during the extension process and not re-surveyed, hence relative levels are estimates only for this period. Relative levels for the extended PVC (from June 2016) were based on client information and not on bore hole survey data.

Table 3- Annual Rainfall Dandenong (Station 086224)

Monthly totals (mm)

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
1960	null	60.2	138.4	13.2	null								
1961	32.6	42.3	48.4	91.4	72.3	80.5	74.9	106.8	41.3	55.1	26.6	44.5	716.7
1962	54	41.4	21.4	30.2	143.4	75.4	69	94.4	69	106.1	24.8	52.3	781.4
1963	157.6	38.6	47	13.5	91.9	63.1	87.8	66.3	95.1	79.1	38	23.8	801.8
1964	11	112.5	41.4	83.9	76	55.6	90.2	81.9	108.1	111.7	55.6	125.6	953.5
1965	20.3	3	42.1	128.4	58.4	16.9	98.4	87.2	42.9	28.5	74.5	49.3	649.9
1966	50	null											
1967	null	null	27.7	29	56.9	56.9	38.6	104.2	81.4	22.9	45.2	60.3	null
1968	26.7	4.9	18.7	114.5	131.7	83.5	68.2	64.2	47.9	64.8	71.3	72.6	769
1969	37.5	104.1	65	33.2	120	20	65.7	56.1	93.6	24.9	51.8	67.1	739
1970	101.9	16.5	153.8	107.5	126	58.4	62.2	123.4	56.2	58.4	72.2	109.7	1046.2
1971	56	63.2	26.4	83.8	139.8	84.8	41.7	53.4	64.4	133.7	116.9	79.2	943.3
1972	52.3	172.2	14	92.6	52	17.3	64.8	60.8	49.3	null	null	null	null
1973	57.2	198.7	101.1	44.7	74.1	73.2	44.6	76.7	54	98.1	60.2	56.1	938.7
1974	54.2	27	68.8	119	149.6	16.9	97.2	94.8	83.7	74.4	35	76.7	897.3
1975	41.2	10.6	55.6	31.6	63.6	54.4	67.6	116.9	109.8	143.4	60.4	47	802.1
1976	26.6	9.3	51.8	37	27.4	43.6	22.1	71.4	85.9	66	89.2	69.4	599.7
1977	46	57.3	22.4	88.2	89	135	80	41.7	49.6	41	38.5	24.8	713.5
1978	43.4	86.4	45.4	56	86.3	28.1	94.8	101.7	90	63.4	113.6	131.3	940.4
1979	53	47.6	26.2	52.2	92.6	50	30.2	84.6	96.7	105.9	27.8	23.9	690.7
1980	46	8.2	14.7	88.1	52.8	71.6	64.8	54.2	36	116.8	48.6	47.6	649.4
1981	44.6	17.2	63.8	55.6	93.8	91	95.4	101.8	28.4	61.8	84.2	44	781.6
1982	59.2	14	52.2	74.2	73.8	56.3	28.8	24.9	49.8	42.2	12	46	533.4
1983	48.8	3.6	39.6	46.4	72	75.4	67	74.6	93.6	92.8	107.4	24	745.2
1984	54	38.2	89.4	50.4	28	41.2	63.2	80.2	130	57.6	63.8	48.2	744.2
1985	17.6	6.6	42	83	58.4	69.8	75.4	82.1	36.8	105	73.4	113.6	763.7
1986	35.9	19	13.2	66	90.6	53	106.8	53.2	52	81.4	27.4	74.2	672.7
1987	49.6	45.8	68	34.4	76.6	76.2	88.6	34	45.8	47.4	52.8	72	691.2
1988	61.6	16.8	28.6	28.4	78.2	83.8	77.8	58.6	70.8	39.8	111	77.4	732.8
1989	45.7	11.8	78.8	91.6	64.6	87.9	70.4	72.3	66	120.4	28.8	37.3	775.6
1990	0.8	65.3	24.3	80	23.8	68.2	94.4	79.6	62.8	90	61.4	26.1	676.7
1991	131.7	0.6	33	43.9	28.3	141	97.2	79.6	100.5	21.3	33	79	789.1
1992	33	27.4	55.5	64.5	86.8	53.2	44.1	64.5	140.6	92.1	122.4	92.8	876.9
1993	120.8	99.7	42.8	22.1	39.2	81	54.4	76.5	153.1	107.2	91.1	160.4	1048.3
1994	52.9	108.1	null	46	41.3	48.8	18.6	30.8	73.2	35.2	65.7	10.8	null
1995	94.2	21.6	93.2	118.3	93.2	101	96.8	60.8	49.6	84	null	47.5	null
1996	98.8	89.2	null										
2002	51.2	81.8	26	60.6	70.6	62.6	39.8	46.2	63.8	47.8	28.8	34.2	613.4
2003	33	31.2	70	110.2	45.8	38.4	117.4	77	59.2	104.4	57	49	792.6
2004	42.2	22	22.6	50.4	51.2	129.8	58.4	91.4	96	57.2	163	45.4	829.6
2005	30.2	171.8	23.6	34.2	26.6	47	45.6	93	79.8	52	92.2	88	784
2006	59.6	90.2	26.2	108	58.6	18.2	43.8	47.4	31.8	17.4	43	58.6	602.8
2007	34	11.6	50.8	21.6	62.6	62.6	91.8	40	50.6	29.6	76.6	161.6	693.4
2008	17.4	31.6	27.4	33	60.4	45	66.6	76.2	31.6	26.2	90.6	81.4	587.4
2009	4.6	2.2	51.2	79.4	16.4	36.4	78.8	69	113.2	59	113.4	45.4	669
2010	40.4	27.2	90.8	61.4	65.8	107.6	41.8	101.8	63.6	147	121.4	98.2	967
2011	113.8	205.4	61	77.6	99.1	49.6	69.8	32.6	94.9	91.1	134.8	78.3	1108
2012	45.2	69.8	76.6	107	110.8	135.6	77	64.8	73.2	62.1	58.4	57.4	937.9
2013	5.6	73	71.4	22.2	68	116	85.2	95.4	79.1	78.3	106.6	69.8	870.6
2014	27.2	24.4	26	97.3	52.2	101.7	59.2	48	60.4	59.2	73.4	49.8	678.8
2015	51.6	43	41.4	62.6	75	32.6	85.4	81.7	48	20.4	50.4	42	634.1
2016	71	13.4	32.2	69	95.4	88.4	95.6	67.2	86	107.2	63.2	65.2	853.8
2017	28	92.2	60	119.8	42.4	35	30.2	81.8	48.4	54.8	30.8	131.8	755.2
2018	86.2	7.5	29	21.8	97.2	71.6	63.2	54.2	41	54.8	135.4	94.2	756.1
2019	3.4	22.6	45.6	23.6	88.8	83.4	81	82	75.6	56.6	75.4		

Italics- data not verified

50.42549 52.39 48.43878 65.99412 73.53922 66.39 68.562 72.554 71.75 71.1449 68.50417 66.74694 778.6745
 40.9375 61.925 47.325 66.82941 64.59412 69.15625 67.9 69.59375 67.475 63.35625 81.475 72.25625 772.5706

Spring Survey Field Parameters

Table 4- Historic Field Parameters Recorded at Spring Locations
Pakenham Quarry

Spring Number	Date	Electrical Conductivity	pH	Redox Potential	Dissolved Oxygen	Temperature	TDS*	Observations
		µS/cm		mV	mg/L	°C	mg/L	
SP01	13-Feb-01	905	7.53	193	-	22.9	588	
	06-Apr-01	1013	6.65	240	1.03	18.4	658	
	07-May-01	1079	7.21	215	5.67	17.2	701	
	15-Jun-01	886	8.21	151	7.11	16.1	576	
	11-Jul-01	994	7.31	194	**	15.8	646	
	13-Aug-01	1104	7.25	189	8.07	17.0	718	
	17-Sep-01	958	7.16	203	5.91	17.0	623	
	04-Oct-01	1048	7.17	230	**	16.0	681	
	20-Nov-01	721	7.06	320	6.07	16.1	469	
	17-Dec-01	1025	7.17	190	9.78	18.8	666	
	22-Feb-02	1054	7.36	173	5.28	22.7	685	
	12-Jun-02	946	6.88	8	4.68	14.7	615	
	30-Jan-03	1260	7.21	43	5.98	19.7	819	
	27-Jun-03	1127	7.08	208	6.10	10.6	733	
	21-Jul-04	988	7.57	305	**	12.1	642	
	12-Mar-09	1140	7.11	-	-	-	741	Main irrigation spring, flow ~1.2L/min, sampled from tank inlet
	25-Jun-10	1076	7.80	-	-	-	699	Parameters gauged at source, flow ~3 L/min
	28-Mar-12	1049	***	-	-	19.3	682	
	25-Jun-13	947	7.58	79.9	10.39	14.4	616	
	15-May-14	1043	7.60	18	9.3	15.8	678	Clear, moderate flow
	26-Feb-16	1674	6.42	105	0.25	16.6	1088	Clear, water flow into tank ~4L/s. Wheelie bin where water collects was half full of water
	18-Jan-17	1156	7.99	73	4.33	20.3	751	Clear, no odour. Water is collected in wheelie bin prior to discharge.
	09-Oct-17	1120	6.99	167	6.16	14.9	728	Vegetation in area in very healthy condition, weeds growing over bin lid. Very boggy in area. Water had been extracted from the tank during the morning and therefore it was recharging. Flowing quickly into tank at approximately 250 mL / 10 seconds. Water clear with suspended solids.
	03-Jul-18	1470	7.01	197	5.70	12.3	956	Vegetation in area in very healthy condition. Very boggy in area. Flowing from Spring via pipe into tank quickly at approximately 250 mL / 4 seconds.
	08-Jan-19	1323	7.38	73.8	6.15	16.1	860	Grey, no odour, medium turbidity, very overgrown
	18-Jul-19	1218	7.44	71	7.15	12.9	792	Clear, low turbidity, no odour, moderate flow into tank.
	16-Dec-19	1200	7.54	37.2	7.37	15.3	780	Thick vegetation. Flowing water in bin.
	SP02	13-Feb-01	3240	8.01	166	-	20.8	2106
06-Apr-01		3090	7.24	219	0.00	19.4	2009	
07-May-01		3030	7.78	187	4.18	13.8	1970	
15-Jun-01		2450	8.66	130	7.39	14.5	1593	
11-Jul-01		2510	7.95	166	**	12.5	1632	
13-Aug-01		2650	8.08	202	7.68	14.2	1723	
17-Sep-01		2600	8.38	135	8.03	16.4	1690	
04-Oct-01		2480	7.83	168	**	14.7	1612	
20-Nov-01		2630	8.32	139	6.14	18.1	1710	
17-Dec-01		2270	7.07	197	6.87	18.0	1476	
22-Feb-02		2660	7.04	191	2.02	21.9	1729	
12-Jun-02		1813	7.41	201	4.59	12.0	1178	
30-Jan-03		4320	7.15	-40	1.28	21.7	2808	
27-Jun-03		3230	7.63	183	7.68	10.3	2100	
21-Jul-04		1829	8.20	311	**	9.9	1189	
12-Mar-09		2990	7.56	-	-	-	1944	Low flow, sample taken from grassy pool / dam
25-Jun-10		2209	8.15	-	-	-	1436	Low flow, parameters taken from dam
28-Mar-12		2342	***	-	-	21	1522	
25-Jun-13		2029	8.09	106.3	11.09	12.5	1319	
15-May-14		2140	7.65	39	12.8	12.3	1391	No flow
26-Feb-16	3130	6.41	199	7.34	17.8	2035	Clear-brown, strong flow with potential to break through wall. Water fed through pipes to trough down slope.	
18-Jan-17	2456	7.38	-18	2.26	20.2	1596	Organic odour. Large pond; water levels managed to prevent bund from collapsing.	
09-Oct-17	2405	7.02	52	2.72	15	1563	Difficult to locate due to healthy vegetation and thick cover of duckweed on pond surface. Troughs that are fed by the spring are full. Pond is deep, no flow noted as troughs are full.	
03-Jul-18	2290	6.05	243	5.66	7.8	1489	Deep pond with large amount of duckweed. This Spring directly feeds into trough and a tank. The flow downhill into the tank was approx. 250ml / 3 sec until was reduced the flow to roughly 250ml / 6 sec	
08-Jan-19	2829	7.19	-107	6.11	17.5	1839	Black, organic odour, medium-high turbidity, overgrown	
18-Jul-19	2070	7.46	86.8	6.26	8.4	1346	No flow, brown, low turbidity, no odour	
16-Dec-19	2838	7.24	41.6	4.87	15.5	1845	Thick grass. Standing water within grass. No visible flow.	

Spring Survey Field Parameters

Table 4- Historic Field Parameters Recorded at Spring Locations
Pakenham Quarry

Spring Number	Date	Electrical Conductivity	pH	Redox Potential	Dissolved Oxygen	Temperature	TDS*	Observations	
		µS/cm		mV	mg/L	°C	mg/L		
SP03	21-Nov-01	540	6.80	242	0.12	18.2	351		
	17-Dec-01	696	7.32	177	5.01	17.9	452		
	22-Feb-02	592	7.38	187	2.38	22.6	385		
	12-Jun-02	696	7.55	192	2.42	12.7	452		
	30-Jan-03	758	8.57	153	6.28	20.7	493		
	27-Jun-03	727	6.85	203	7.82	12.3	473		
	21-Jul-04	713	7.86	295	**	11.9	463		
	12-Mar-09	899	7.16	-	-	-	584	Low flow, degraded/eroded by cattle, organic material	
	25-Jun-10	599	7.62	-	-	-	389	Parameters taken from dam below the discharge point	
	28-Mar-12	599	***	-	-	11.3	389		
	25-Jun-13	589	7.91	72.1	7.86	12.6	383		
	15-May-14	552	8.50	39.5	4.05	13.9	359	Low flow, cattle prints evident	
	26-Feb-16	1022	6.37	84	7.34	17.6	664	Large pool spilling down slope, duckweed, cow hoof imprints, water brown-clear	
	18-Jan-17	674	7.88	52	2.55	19.7	438	Large pool, no flow observed. Water pooled in cow hoof prints to half way down slope.	
	09-Oct-17	655	6.97	101	7.30	14.5	426	Vegetation and spring both appear very healthy as per last time. Large pool and boggy in area. Cattle trough full so no flow observed.	
	03-Jul-18	669	7.8	200	8.31	10.4	435	Large pool and boggy in area. Cattle trough full so no flow observed.	
08-Jan-19	784	7.39	-430	5.10	18.2	510	Black/clear, no odour, low-medium turbidity		
18-Jul-19	775	7.14	-40.1	1.33	9.8	504	Cow in Springs. No odour, grey, low turbidity		
16-Dec-19	812	7.87	-17.1	2.36	14.5	528	Tall grass and floating vegetation. No flow.		
SP04	17-Dec-01	1206	7.11	196	2.05	17.1	784		
	22-Feb-02	928	7.08	185	3.75	21.8	603		
	12-Jun-02	Could not find any signs of flow, ground wet in this area.							
	30-Jan-03	1359	7.58	145	6.08	18.1	883		
	27-Jun-03	1096	7.89	176	8.07	11.5	712		
	21-Jul-04	1031	8.84	296	**	11.6	670		
SP04(N)	12-Mar-09	1469	7.43	-	-	-	955	Northern discharge point, low to no flow	
SP04 (S)	12-Mar-09	1342	7.69	-	-	-	872	Southern discharge point, low flow	
	25-Jun-10	1080	6.75	-	-	-	702	Low flow, parameters taken from groundwater discharge pooling in hoof impressions	
	28-Mar-12	1099	***	-	-	19.5	714		
	25-Jun-13	1414	7.39	15.5	0.00	14.9	919		
	15-May-14	875	7.43	-43	4.05	12.7	569	No measurable flow, stagnant	
	26-Feb-16	1078	6.80	97	1.24	17.8	701	Small puddle of water (<30cm ² , and <5cm deep), wet, marshy grass, water clear	
	18-Jan-17	1004	7.92	65	4.33	20.3	653	Small puddle; clear, marshy, overgrown and boggy; around 30 cm2 x 5 cm deep.	
	09-Oct-17	1498	6.89	232	3.33	14.5	974	Shallow pool (~5cm) and very boggy in area. Vegetation healthy.	
	03-Jul-18	Spring dry. Vegetation healthy.							
	08-Jan-19	Spring dry. Vegetation healthy.							
	18-Jul-19	Spring dry. Vegetation healthy.							
	16-Dec-19	Spring dry. Vegetation healthy.							
	SP05	21-Nov-01	434	6.93	107	5.04	16.6	282	
		17-Dec-01	2350	6.92	206	5.24	17.3	1528	
22-Feb-02		487	6.76	207	1.77	22.0	317		
12-Jun-02		Could not find any signs of flow, ground wet in this area.							
30-Jan-03		No obvious water even with digging, but area green							
27-Jun-03		612	7.85	212	6.01	10.2	398		
21-Jul-04		280	7.34	280	**	9.9	182		
12-Mar-09		Could not locate, no obvious flow							
25-Jun-10		Could not locate, no obvious flow							
28-Mar-12		Could not find signs of flow							
25-Jun-13		Could not be located							
15-May-14		Spring dry							
26-Feb-16		Spring dry							
18-Jan-17		No parameters could be taken.							
09-Oct-17		Spring dry							
03-Jul-18		Spring dry. Vegetation healthy.							
08-Jan-19		Spring dry. Vegetation healthy.							
18-Jul-19		Spring dry. Vegetation healthy.							
16-Dec-19		Spring dry. Vegetation healthy.							

Spring Survey Field Parameters

Table 4- Historic Field Parameters Recorded at Spring Locations
Pakenham Quarry

Spring Number	Date	Electrical Conductivity	pH	Redox Potential	Dissolved Oxygen	Temperature	TDS*	Observations	
		µS/cm		mV	mg/L	°C	mg/L		
SP06	04-Oct-01	574	7.65	174	**	16.5	373		
	21-Nov-01	477	7.19	135	6.39	20.9	310		
	17-Dec-01	638	7.04	195	3.22	21.5	415		
	22-Feb-02	701	7.41	170	2.17	24.3	456		
	30-Jan-03	720	8.01	103	5.75	17.0	468		
	27-Jun-03	785	6.54	234	5.86	10.5	510		
	21-Jul-04	463	8.01	315	**	11.7	301		
	12-Mar-09	No flow							Dry, some subsurface flow assumed
	25-Jun-10	660	7.07	-	-	-	429		
	28-Mar-12	No flow							
	25-Jun-13	388	7.12	51.9	5.30	16.6	252		
	15-May-14	527	7.58	-40.5	13.00	13.6	343	No measurable flow, stagnant	
	26-Feb-16	846	6.98	143.0	3.86	22.2	550	Pool of water, 10x5m, duckweed, water clear to moderate turbidity	
	18-Jan-17	457	8.29	58	8.70	25.4	297	Pool of water, 10 x 5 m, with duckweed.	
	09-Oct-17	Not able to be accessed							
	03-Jul-18	543	7.32	222	8.52	9.8	353	Stagnate water, very boggy and pool approx. 15-20m2 and 0.5 deepest point.	
	08-Jan-19	592	8.1	38.7	10.62	22.3	385	Brown, no odour, low-medium turbidity	
	18-Jul-19	417.9	7.68	36.1	9.01	9.4	272	Brown, no odour, low turbidity, boggy	
	16-Dec-19	437.5	7.88	49.3	7.64	17.5	284	Standing water. Livestock pugging evident.	
SP07	04-Oct-01	758	7.74	166	**	15.4	493		
	21-Nov-01	406	7.05	110	7.03	21.1	264		
	12-Jun-02	627	7.04	218	3.45	13.2	408		
	12-Mar-09	No flow							Dry, some subsurface flow assumed
	25-Jun-10	493	6.14	-	-	-	320	Significant pooling in valley floor	
	28-Mar-12	831	***	-	-	16.4	540		
	25-Jun-13	251	7.56	98.9	10.55	14.6	163		
	15-May-14	No flow							No flow, very shallow/small ponds, parameters not possible
	26-Feb-16	Dry							
	18-Jan-17	Dry							
	09-Oct-17	Not able to be accessed							
	03-Jul-18	Not able to be accessed							
	08-Jan-19	Not able to be accessed							
	18-Jul-19	Dry							Dry and no sign of water in valley going towards dam. Large amounts of blackberry plants and some dumped rubbish in valley.
	16-Dec-19	Dry / Not identified							No damp ground observed.
	SP08	21-Nov-01	1748	7.12	118	4.60	17.9	1136	
		17-Dec-01	642	7.11	194	2.95	19.2	417	
		22-Feb-02	611	7.81	131	7.83	25.2	397	
		12-Jun-02	731	7.36	201	3.61	12.6	475	
30-Jan-03		880	7.60	122	4.76	18.4	572		
27-Jun-03		1103	6.73	232	6.98	9.6	717		
21-Jul-04		572	8.02	323	**	11.7	372		
12-Mar-09		No flow							Dry, no indication of recent flow
25-Jun-10		No flow							No flow
28-Mar-12		706	***	-	-	16.4	459		
25-Jun-13		457	7.57	100.3	10.42	14.6	297		
15-May-14		606	7.88	32	13	13	394	No measurable flow, stagnant. Cattle prints evident	
26-Feb-16		1369	6.29	116	4.7	22.1	890	Hoof indentations, area marshy.	
18-Jan-17		675	7.82	64	6.16	25.4		Water pooling in dozens of small locations, with minor flow in parts.	
09-Oct-17		Not able to be accessed							
03-Jul-18		504	6.62	222	5.76	8.6	328	Large wetland with alot of reeds, clear/orange tinge, water, no odour and suspended solids.	
08-Jan-19		1103	7.79	86.2	6.98	21.7	717	Overgrown, brown/clear, no odour, low-medium turbidity	
18-Jul-19		396.4	7.36	42.1	8.31	10.3	258	Reeds, no odour, low turbidity, clear	
16-Dec-19		631	7.94	46.9	9.61	16.9	410	Standing water in pond. Low flow down slope. Oxidised iron apparent in stream.	
SP09	22-Feb-02	229	6.90	198	6.90	23.3	149		
	12-Jun-02	Could not find any signs of flow, ground wet in this area.							
	30-Jan-03	Could not find any signs of flow, area green.							
	27-Jun-03	759	6.40	142	8.23	10.6	493		
	21-Jul-04	909	7.04	254	4.52	8.9	591		
	12-Mar-09	No flow							Dry, subsurface flow assumed
	25-Jun-10	550	6.66	-	-	-	358	Low to moderate flow with ponding below at the break of slope, parameters from discharge zone	
	28-Mar-12	676	***	-	-	20	439		
	25-Jun-13	899	8.56	133.7	10.06	15.9	584		
	15-May-14	1053	6.68	-40	1.7	15.4	684	Very low flow, doesn't now appear to be a spring	
	26-Feb-16	1798	6.40	-22	0.26	22.2	1169	Measurement collected at large pond with reeds, clear. Unlikely that the pond is reflective of seepage only. Will be collecting rainfall and run off also.	
	18-Jan-17	860	8.36	65	12.23	22.2	559	Large pond. Spring area cannot be observed.	
	09-Oct-17	1185	7.33	85	4.44	16.4	770	Former spring 9 is now a small wetland. Wetland full with water. Highest water level observed in the area. Vegetation very healthy and wildlife.	
	03-Jul-18	1169	5.16	199	6.47	10.8	760	Small wetland full of water. Vegetation very healthy due to large amount of water	
	08-Jan-19	1163	7.63	86.7	6.58	21.5	756	Black/clear, no odour, low-medium turbidity	
	18-Jul-19	780	7.53	-8.8	10.24	9.4	507	Large pond, cloudy/grey no-odour, low turbidity	
	16-Dec-19	1231	7.59	-2	6.81	18.4	800	Wetland. Reeds and other vegetation healthy.	
	SP10	19-Apr-02	2819	6.15	260	9.52	17.4	1832	
		12-Jun-02	2640	6.80	230	7.20	10.6	1716	
30-Jan-03		2292	7.43	43	6.15	24.6	1490		
27-Jun-03		1167	6.52	137	8.63	10.6	759		
21-Jul-04		374	7.71	282	9.13	9.2	243		
12-Mar-09		No flow							Spring dry, sample taken from dam fed by spring
25-Jun-10		790	7.03	-	-	-	514	Low flow, parameters from discharge pooling in cattle hoof impression	
28-Mar-12		1207	***	-	-	19.8	785		
25-Jun-13		578	7.37	29.8	6.99	11.3	376		
15-May-14	Spring dry								
26-Feb-16	1616	6.34	73	8.48	19.7	1050	Hoof indentations with water pooling in them- about 5cm deep, water clear.		

Spring Survey Field Parameters

Table 4- Historic Field Parameters Recorded at Spring Locations
Pakenham Quarry

Spring Number	Date	Electrical Conductivity	pH	Redox Potential	Dissolved Oxygen	Temperature	TDS*	Observations
		µS/cm		mV	mg/L	°C	mg/L	
	18-Jan-17	Spring dry						Dry- spring area cannot be observed.
	09-Oct-17	Water as per SP09						Boggy area that feeds the wetland at the location of former Spring 9. Vegetation healthy and very wet and boggy. No parameters taken and water only pooled in small amounts and the same water feeds spring 9 wetland.
	03-Jul-18	No parameters could be taken.						Boggy area that feeds the wetland at the location of former Spring 9. Vegetation healthy and very wet and boggy. No parameters taken and water only pooled in small amounts and the same water feeds spring 9 wetland
	08-Jan-19	Spring dry						Dry
	18-Jul-19	Spring dry						Dry. Vegetation healthy
	16-Dec-19	Spring dry						Damp seep in embankment.

* TDS estimated by electrical conductivity x 0.65

**Dissolved Oxygen not recorded as probe malfunctioning

***pH readings not reported due to probe error

Groundwater salinity data

Table 5 - Historical groundwater bore development data

BORE ID	DATE	EC ($\mu\text{S}/\text{cm}$)	TDS* (mg/L)
MB04C	18/01/2017	3461	2318.87
MB02C	18/01/2017	2964	1985.88
MB02B	21/10/2014	2017	1351.39
MB04B	23/10/2014	2161	1447.87
MB03B	28/10/2014	1702	1140.34
MB05B	28/10/2014	1806	1210.02

* TDS calculation = EC (uS/cm) X 0.67



Attachment 3

Charts

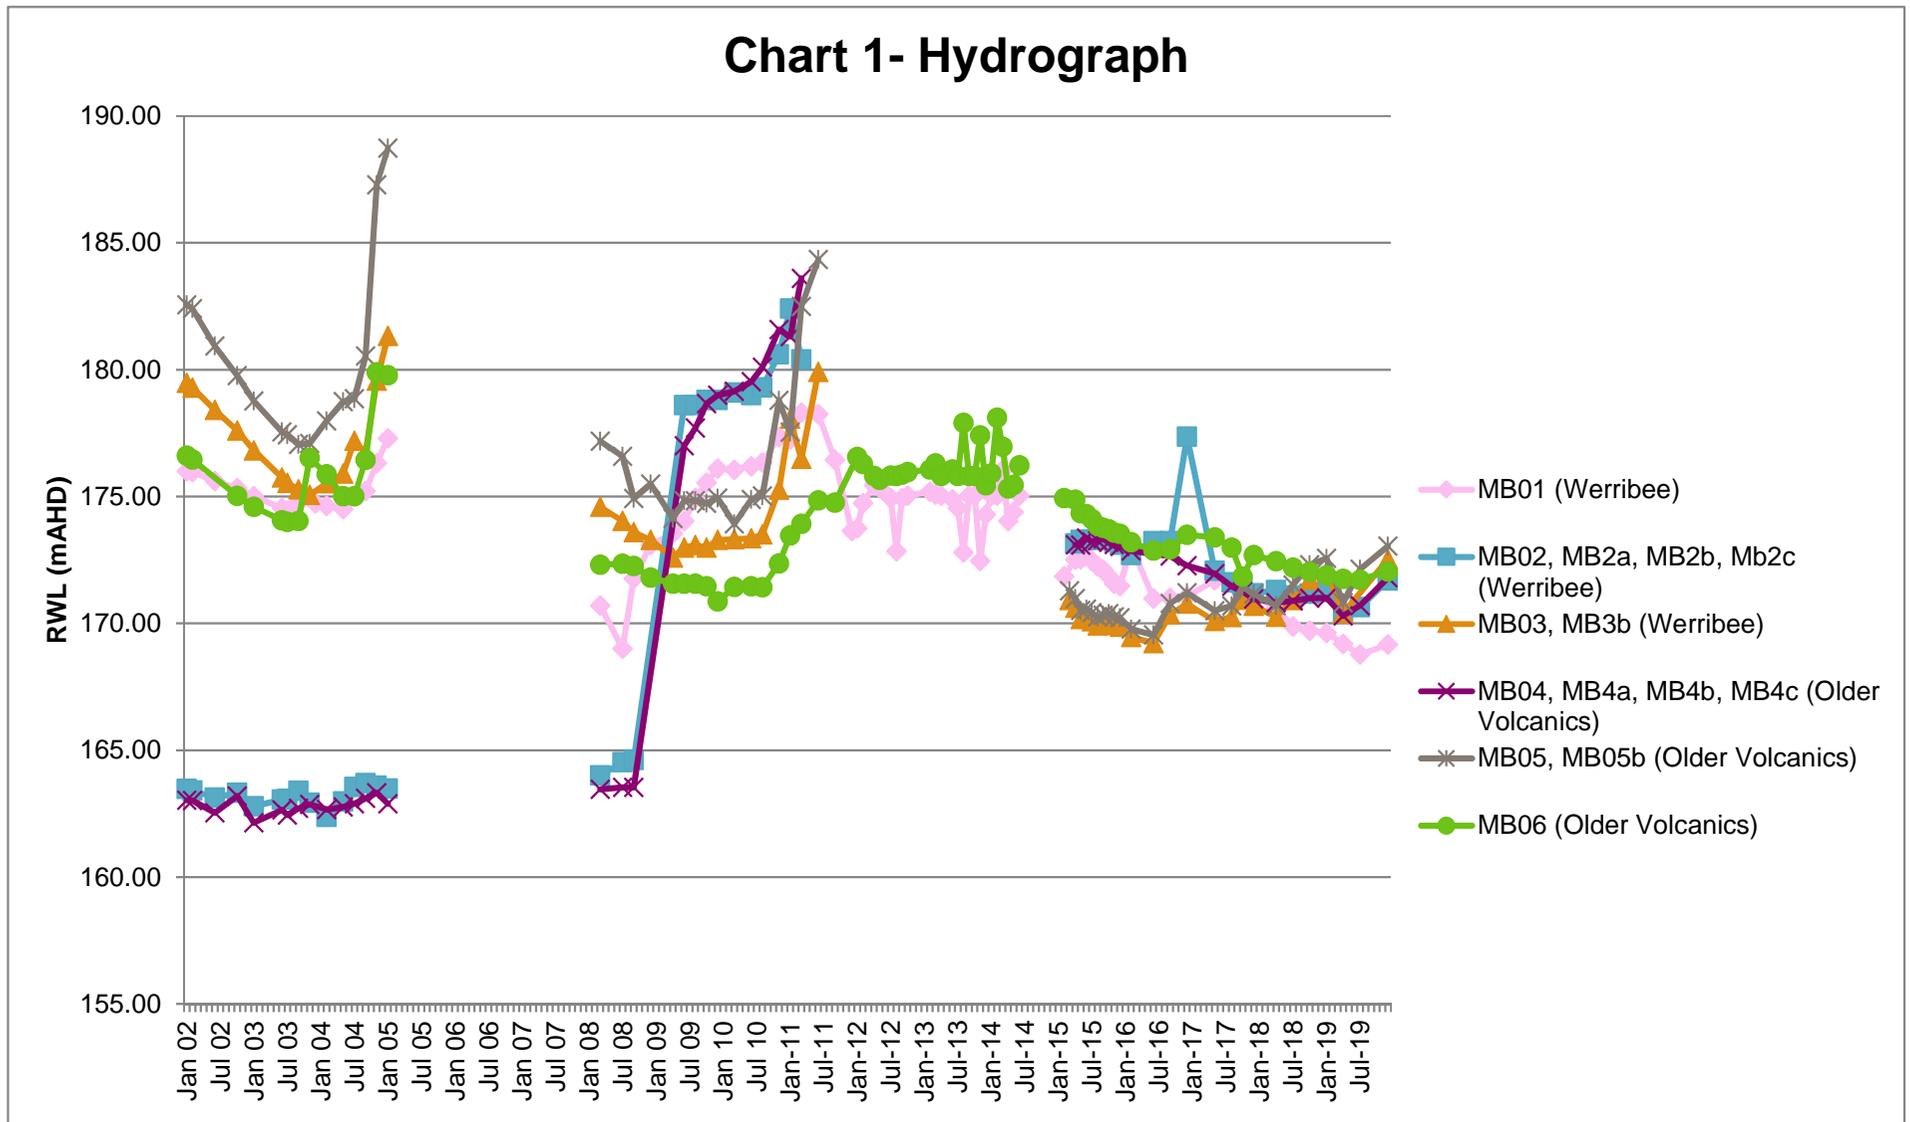


Chart 2- Hydrograph vs. Rainfall

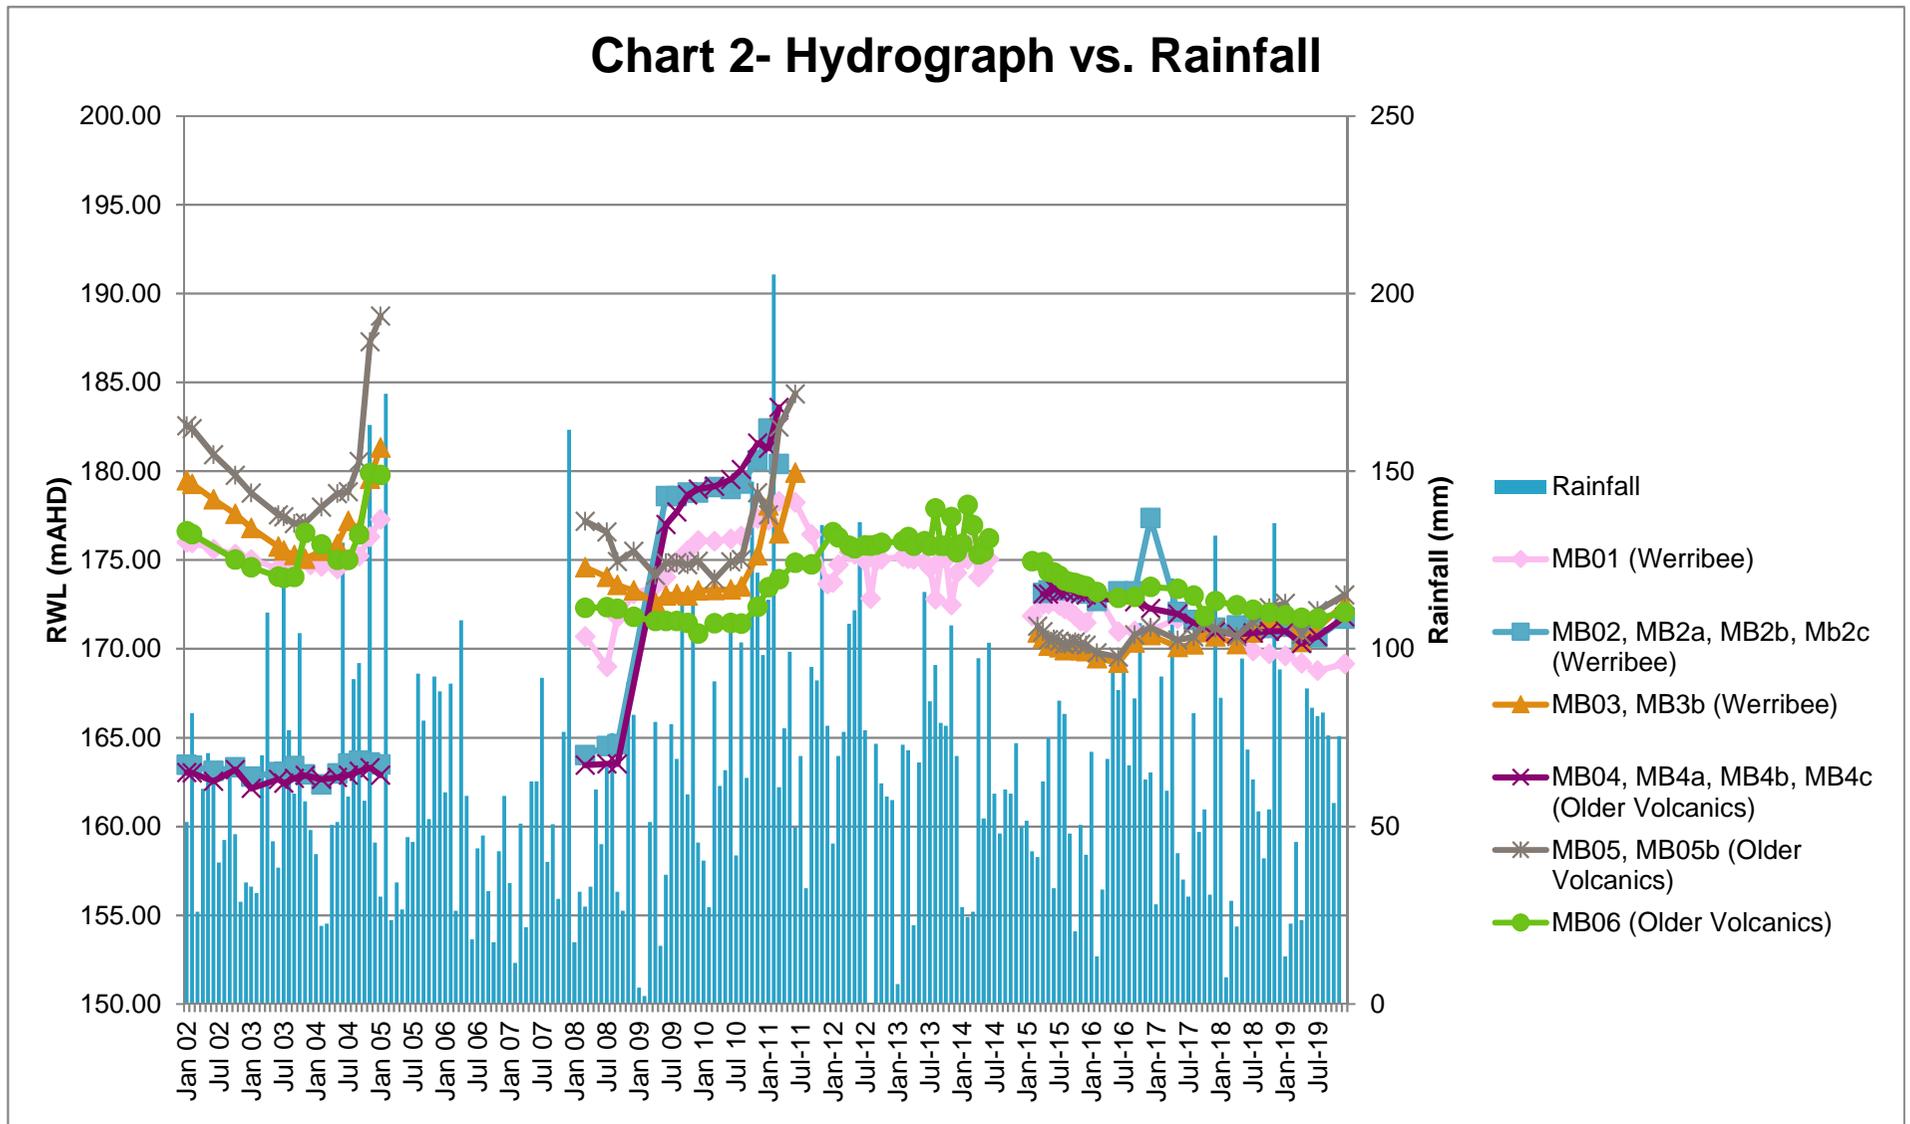
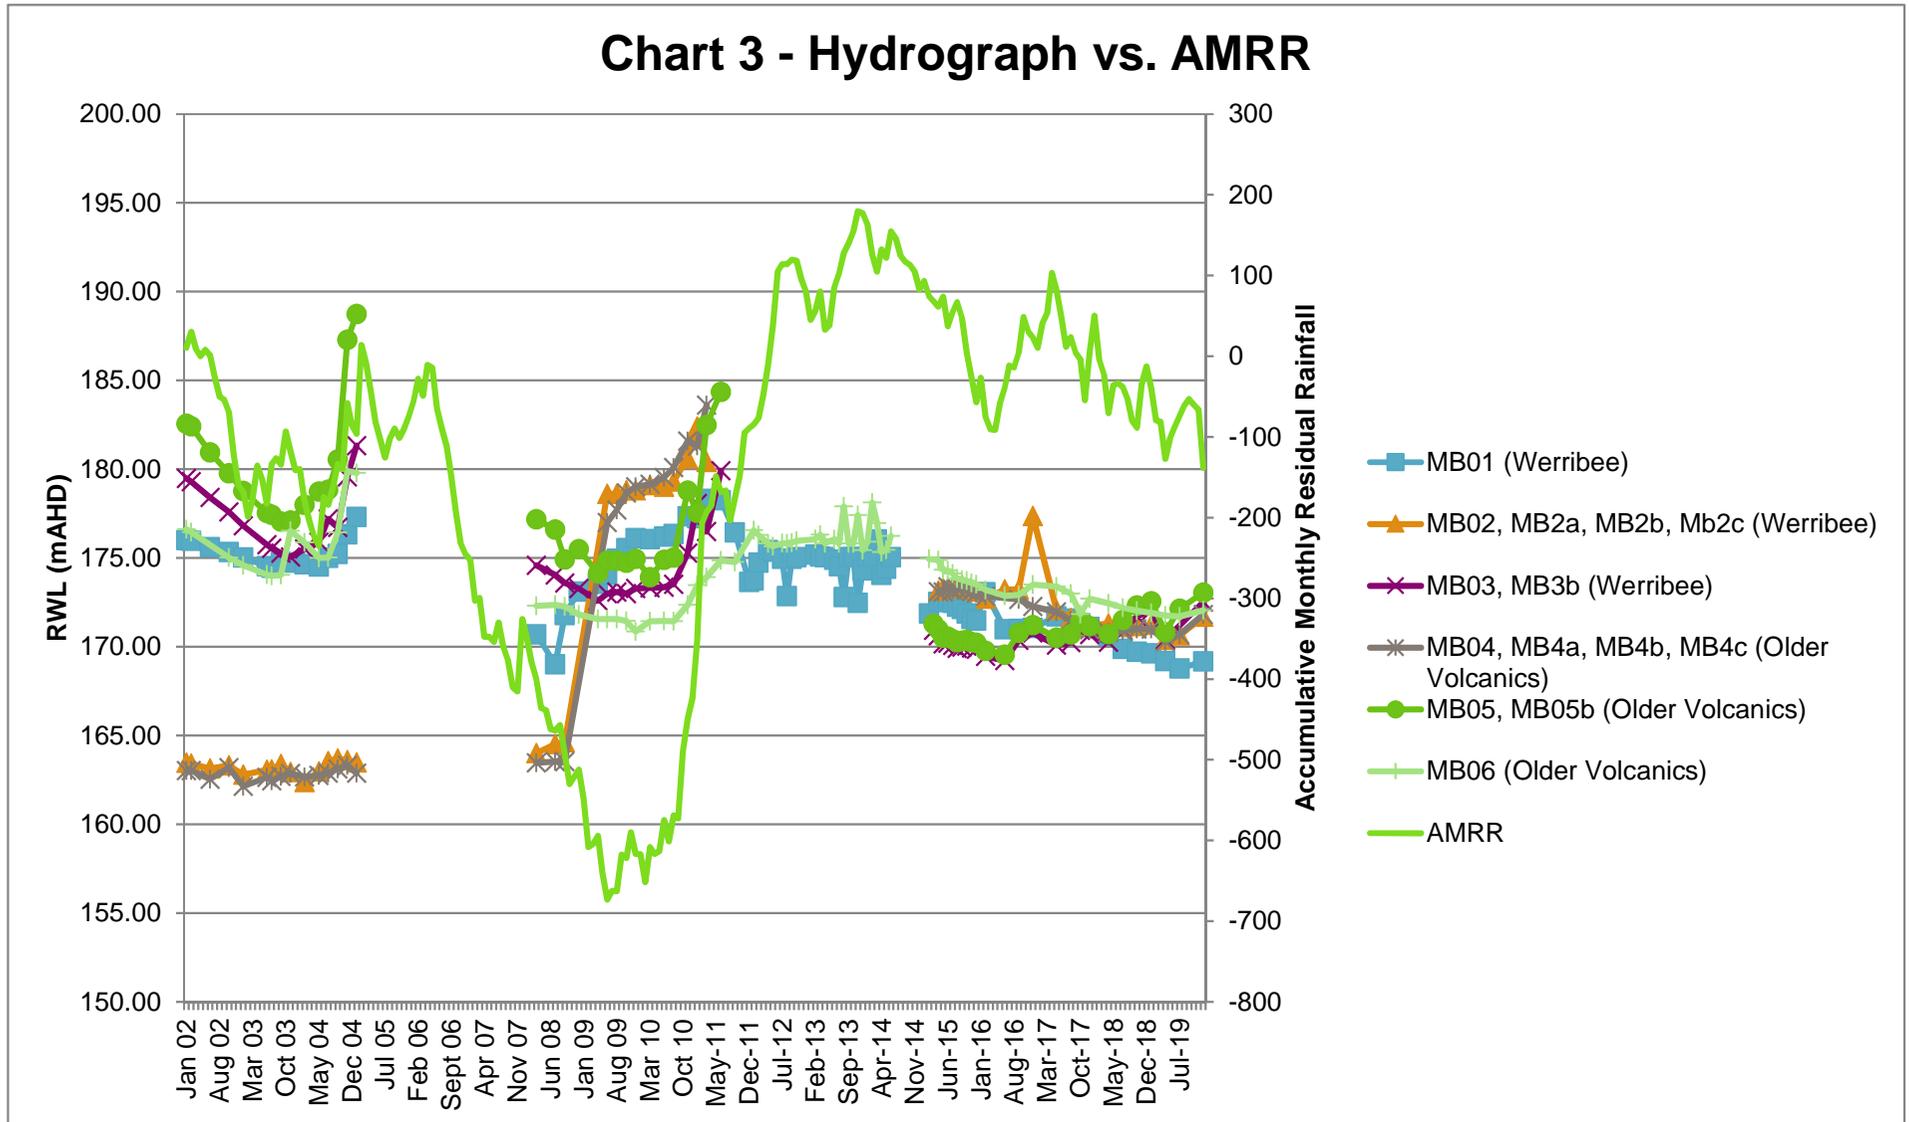


Chart 3 - Hydrograph vs. AMRR



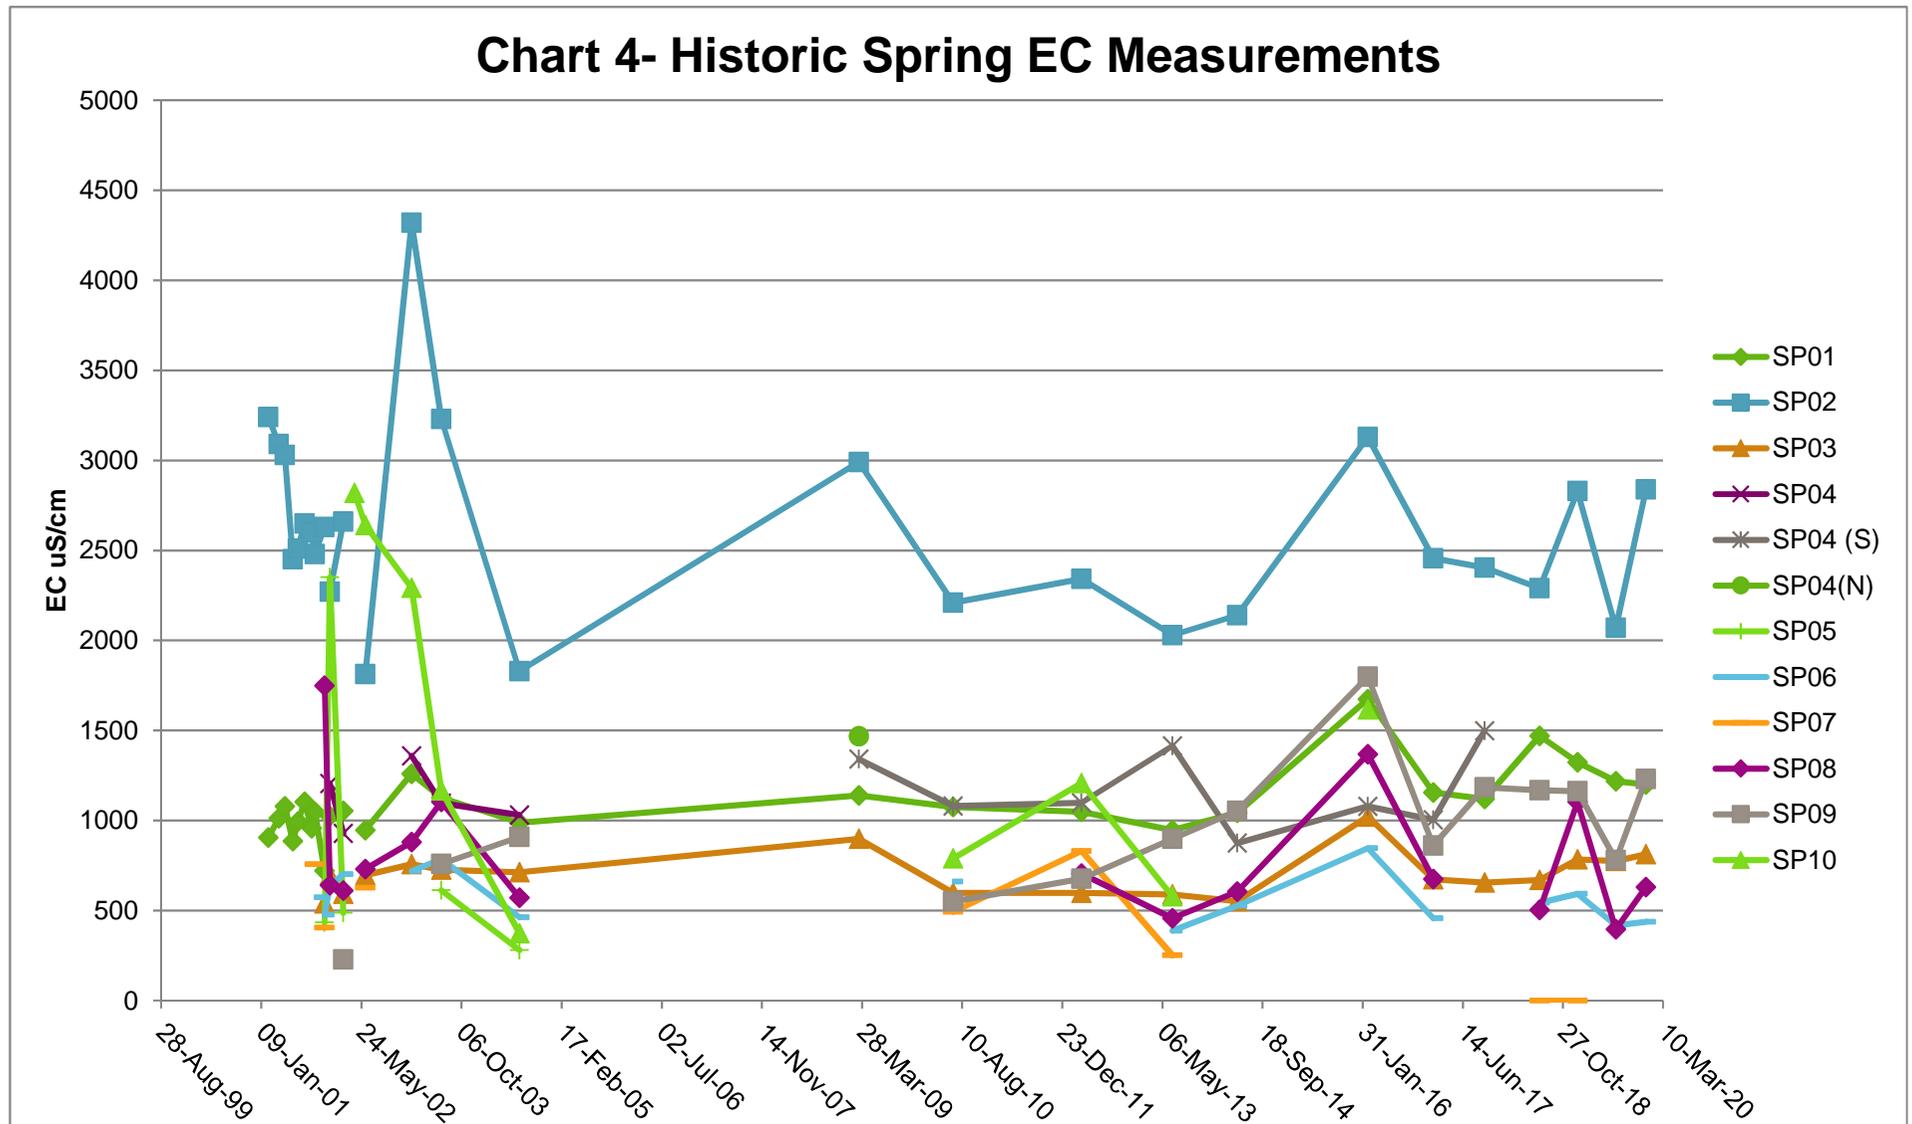


Chart 5- Spring EC vs. Rainfall

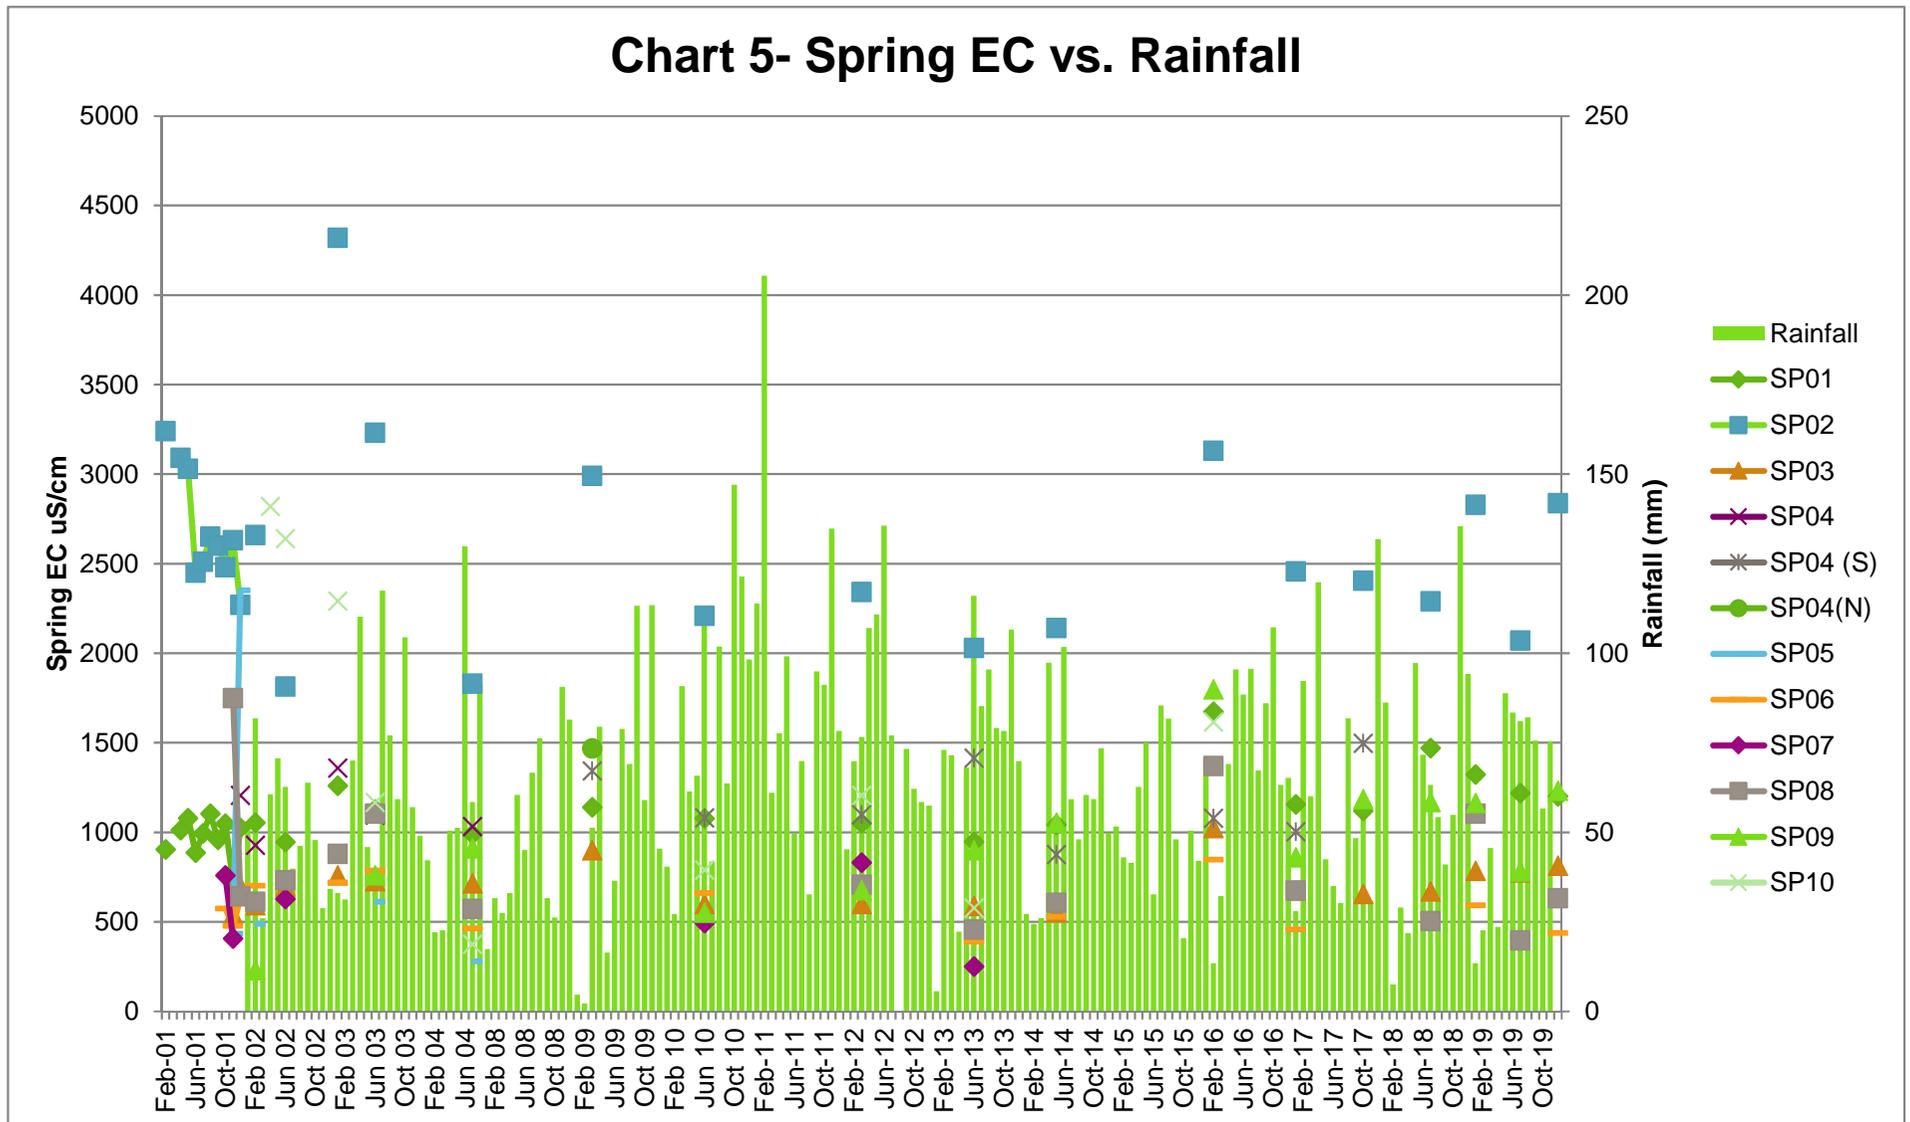


Chart 6- Spring EC vs. AMRR


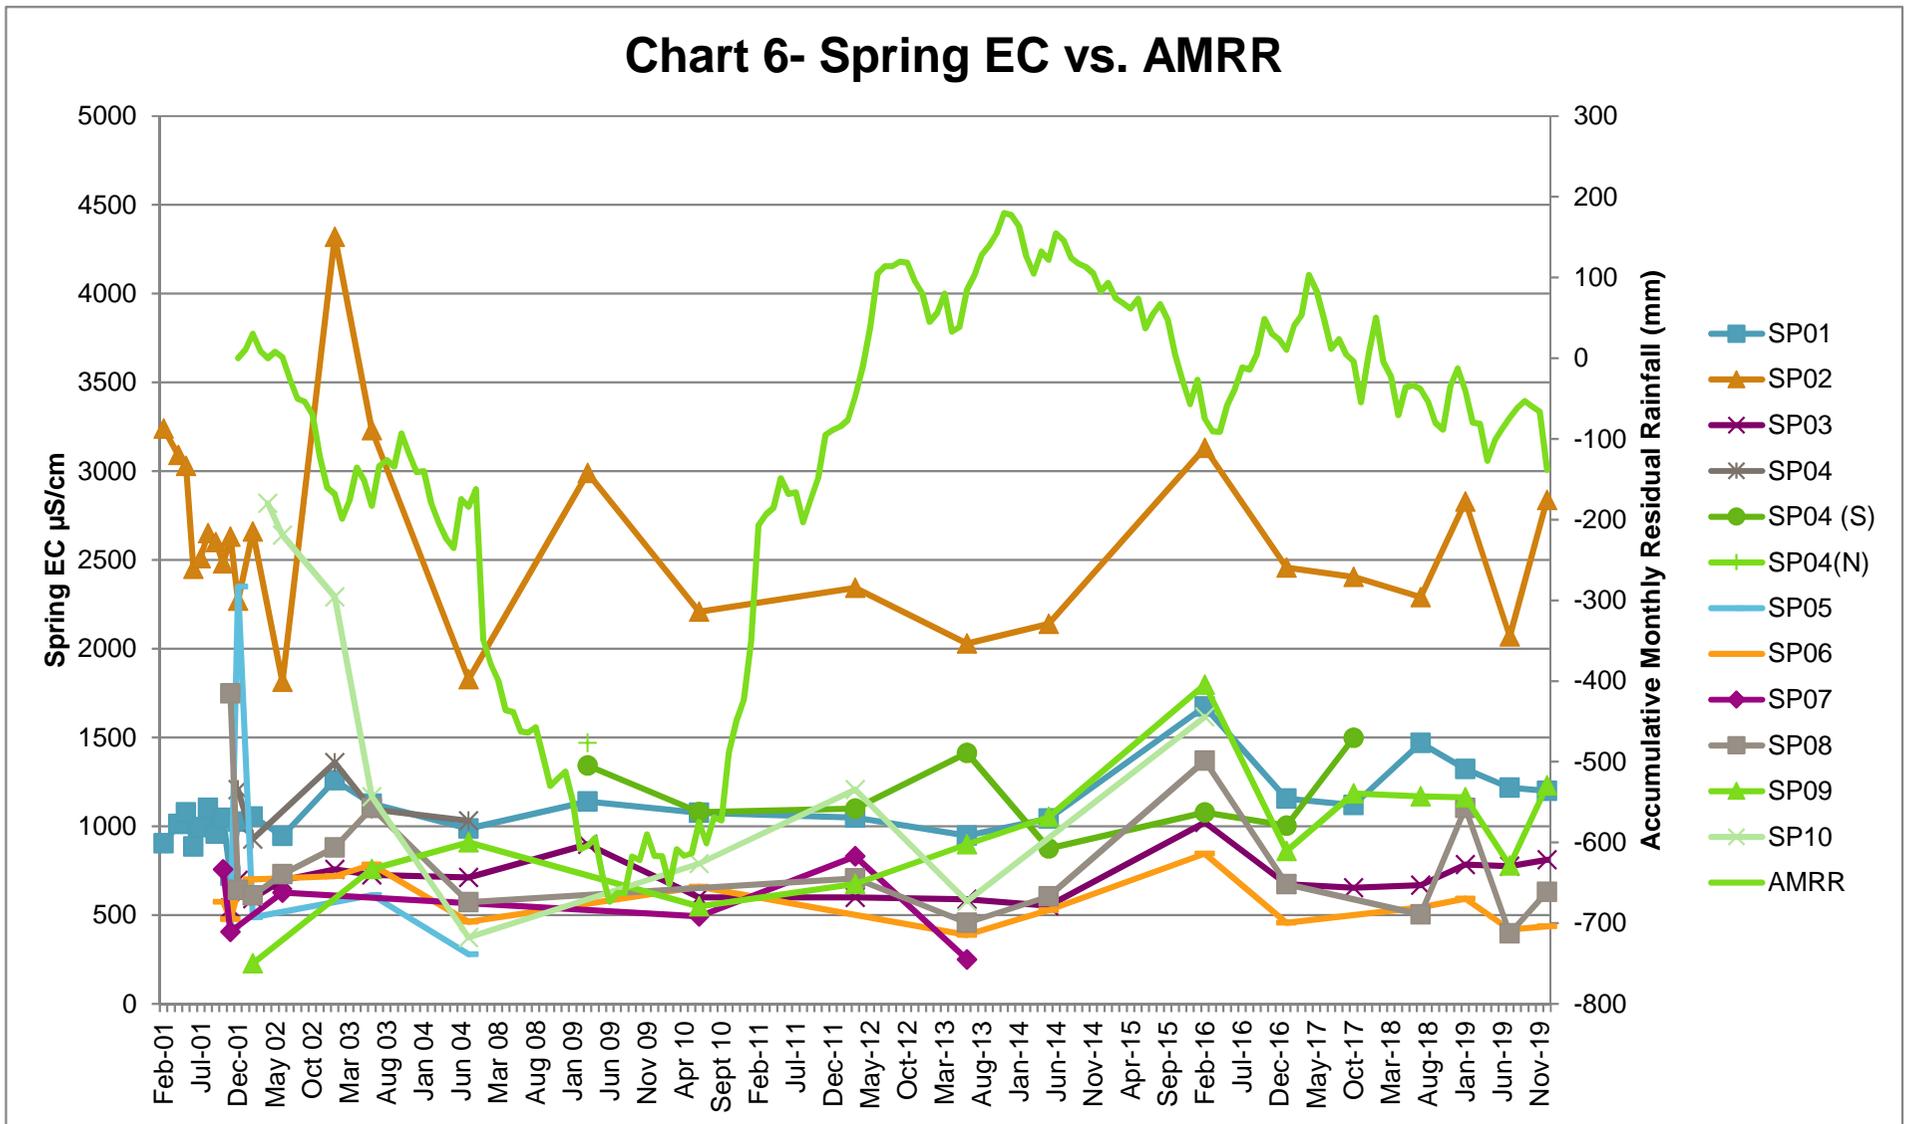


Chart 7 - Historic salinity (TDS) measurements



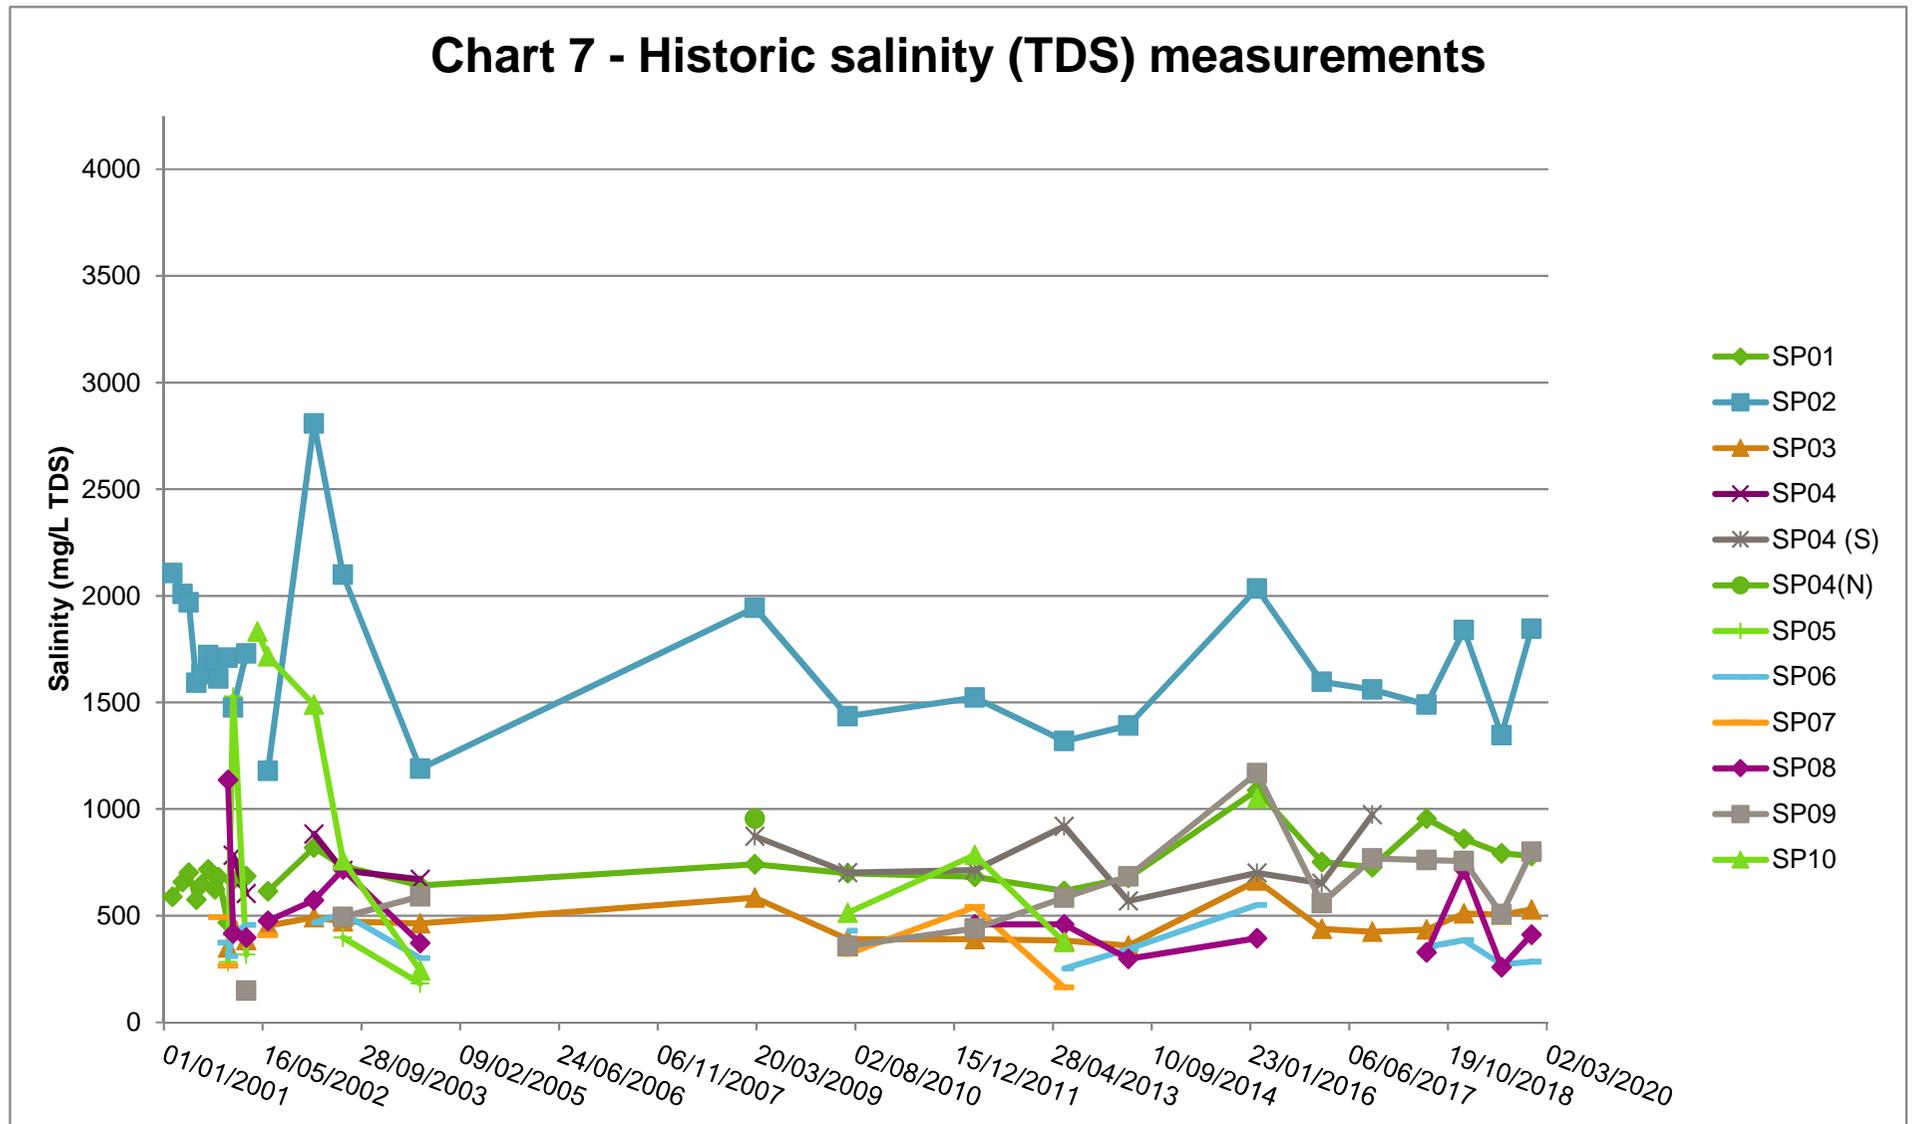

Attachment 4

Site photographs

Attachment 4 Site Photographs

July 2019	December 2019	
		<p>Plate 1 Spring 1</p>

July 2019	December 2019	
		Plate 2 Spring 2

July 2019	December 2019	
		<p>Plate 3 Spring 3</p>
		<p>Plate 4 Spring 4</p>

July 2019	December 2019	
		Plate 5 Spring 5

July 2019	December 2019	
		<p>Plate 6 Spring 6</p>
	<p>- No photo</p>	<p>Plate 7 Spring 7</p>


July 2019	December 2019	
		<p>Plate 8 Spring 8</p>
		<p>Plate 9 Spring 9</p>

July 2019	December 2019	
		Plate 10 Spring 10



Attachment 5

Areas of Progressive
Stripping and
Revegetation

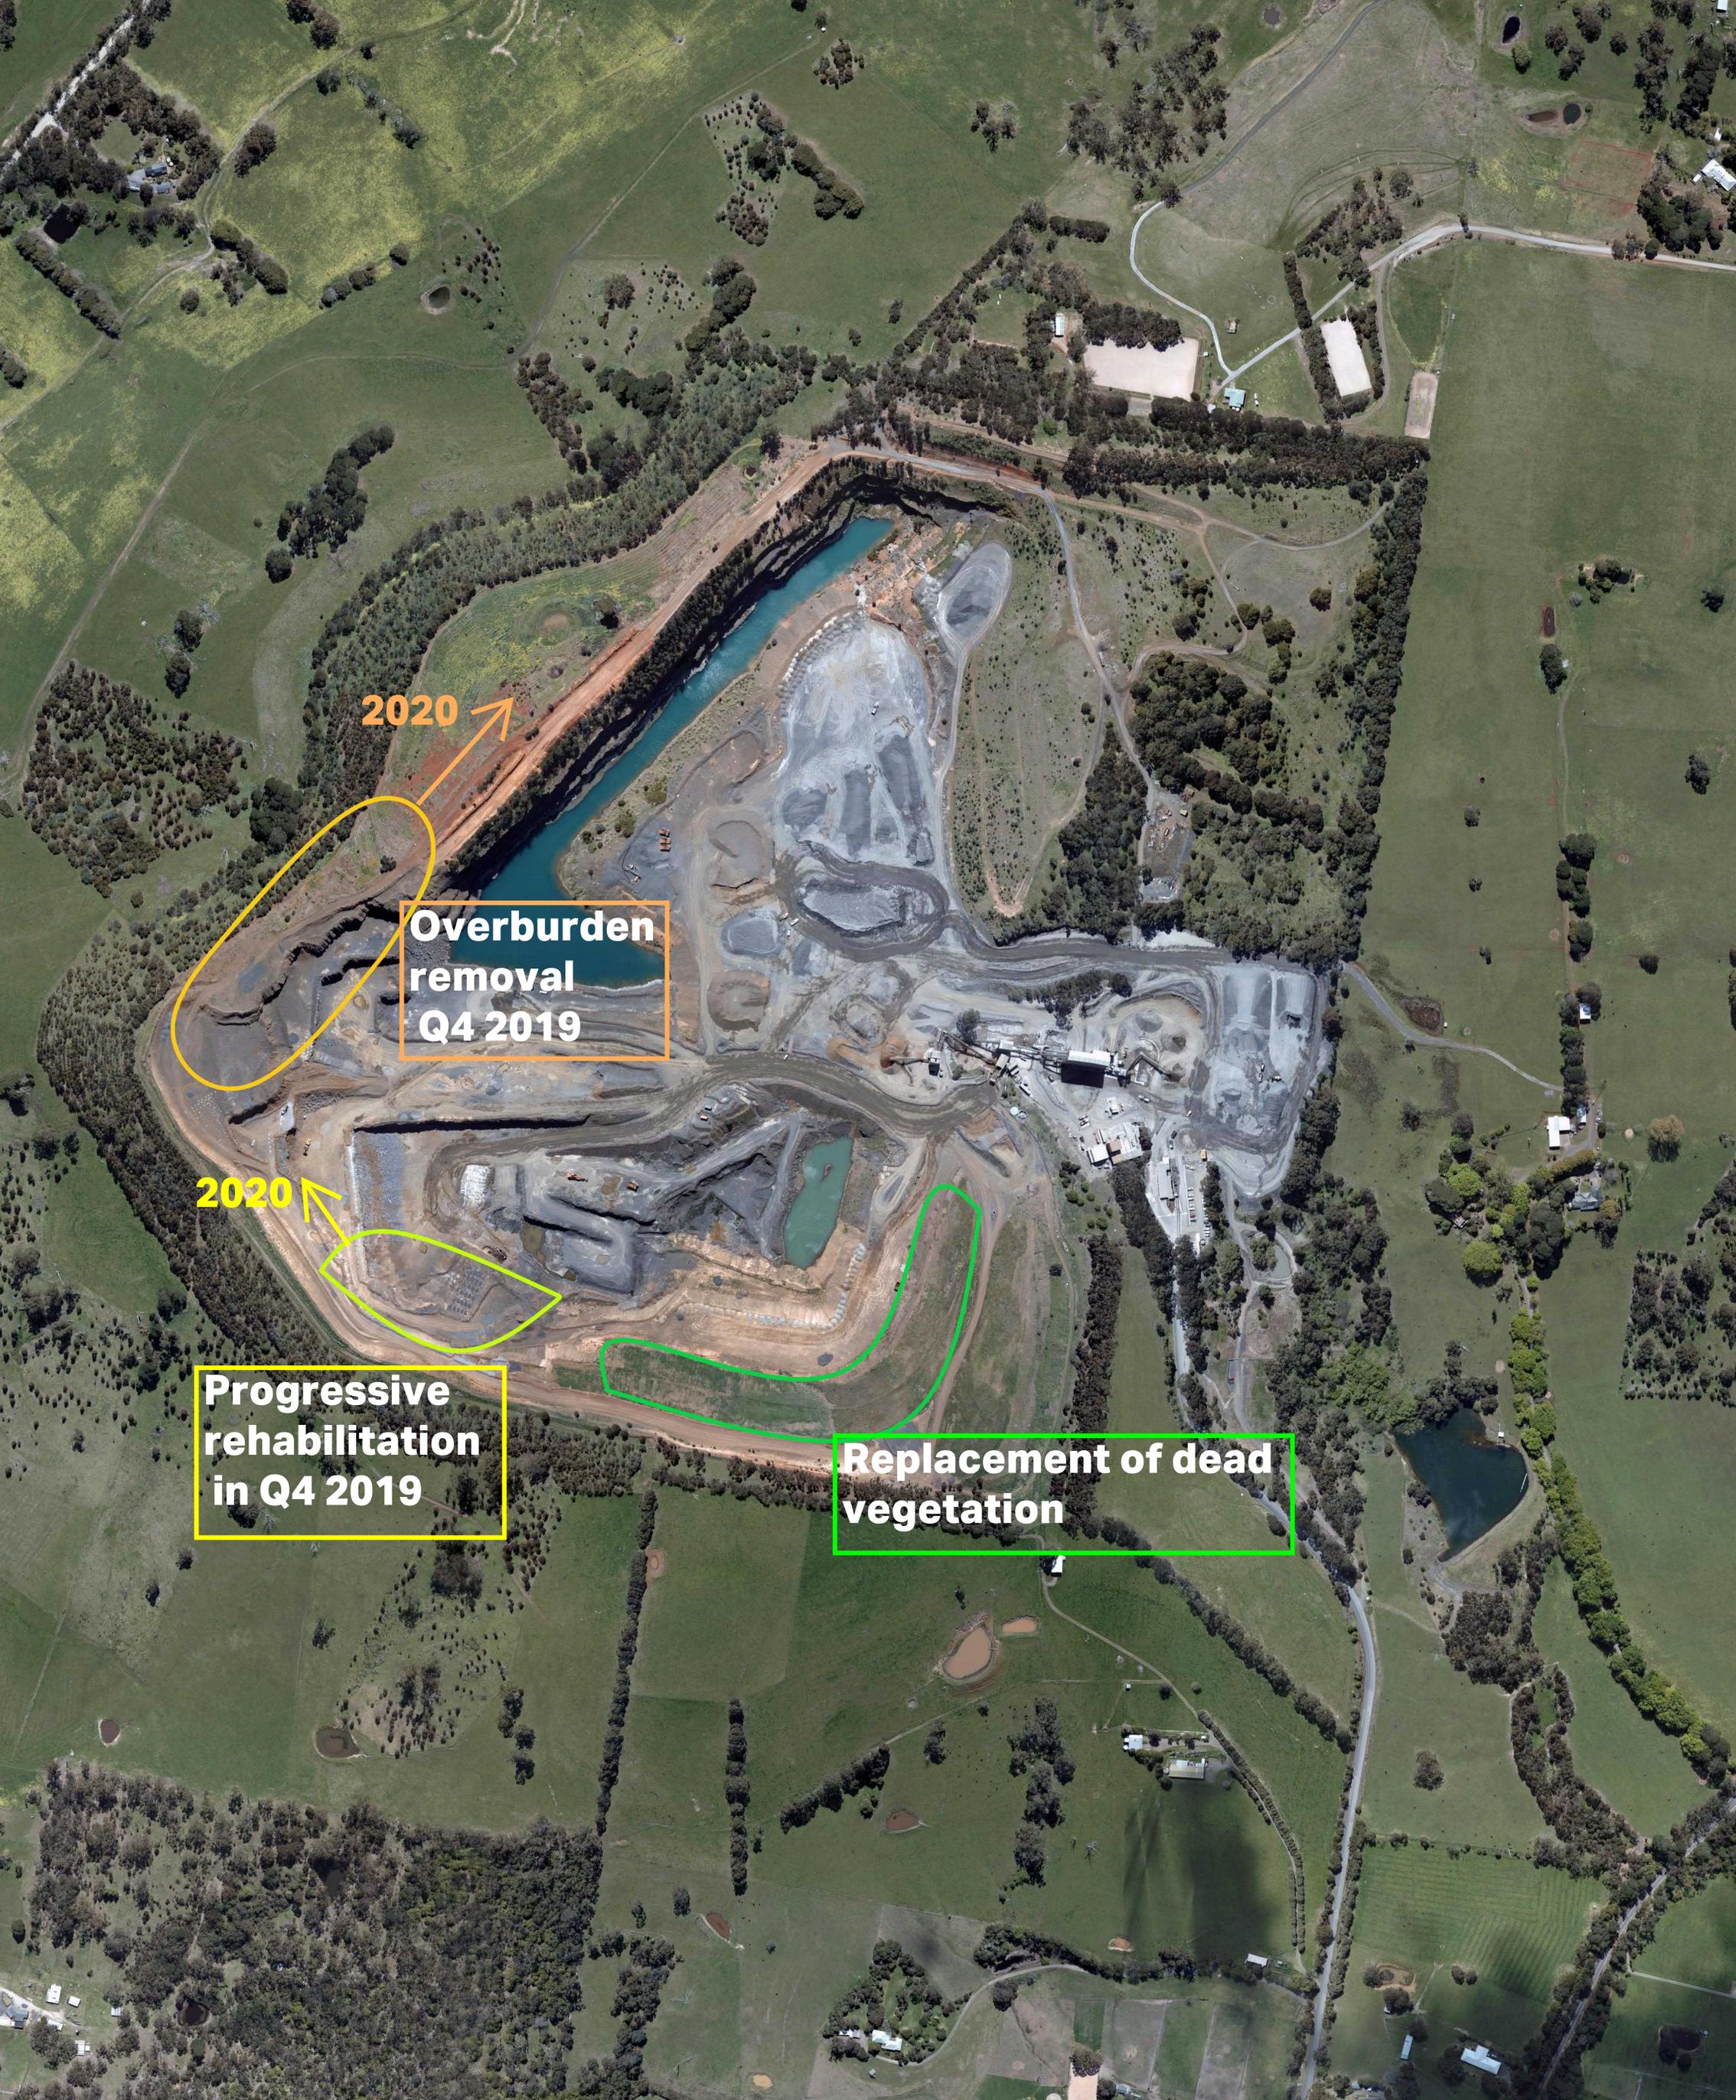

2020

**Overburden
removal
Q4 2019**

2020

**Progressive
rehabilitation
in Q4 2019**

**Replacement of dead
vegetation**