Noise Monitoring Assessment

Teven Quarry, Teven, NSW Quarter 3 Ending September 2021.



Prepared for: Holcim (Australia) Pty Ltd July 2021 MAC180611-06RP13

Document Information

Noise Monitoring Assessment

Teven Quarry, Teven, NSW

Quarter 3 Ending September 2021

Prepared for: Holcim (Australia) Pty Ltd

Prepared by: Muller Acoustic Consulting Pty Ltd PO Box 678, Kotara NSW 2289 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-06RP13	Final	30 July 2021	Nicholas Shipman	N.Shp	Rod Linnett	RH Leff-

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



CONTENTS

1	II	NTRODUCTION	5
2	Ν	IOISE CRITERIA	7
3	Ν	IETHODOLOGY	9
	3.1	LOCALITY	9
	3.2	NOISE MONITORING LOCATIONS	9
	3.3	ASSESSMENT METHODOLOGY	9
4	F	RESULTS	11
	4.1	ASSESSMENT RESULTS - LOCATION NM1	11
	4.2	ASSESSMENT RESULTS - LOCATION NM2	12
	4.3	ASSESSMENT RESULTS - LOCATION NM3	13
	4.4	ASSESSMENT RESULTS - LOCATION NM4	14
	4.5	ASSESSMENT RESULTS - LOCATION NM5	15
5	C	DISCUSSION	17
	5.1	DISCUSSION OF RESULTS - LOCATION NM1	17
	5.2	DISCUSSION OF RESULTS - LOCATION NM2	17
	5.3	DISCUSSION OF RESULTS - LOCATION NM3	17
	5.4	DISCUSSION OF RESULTS - LOCATION NM4	18
	5.5	DISCUSSION OF RESULTS - LOCATION NM5	18
6	C	CONCLUSION	19

APPENDIX A - GLOSSARY OF TERMS





1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for the quarterly period ending September 2021 for Teven Quarry (the 'quarry'), Teven, NSW.

The monitoring has been conducted in accordance with the Teven Noise Management Plan (NMP) and in general accordance with relevant conditions outlined in the Development Consent (ref: SSD 6422) at five representative monitoring locations. This assessment has been undertaken during Quarter 3, ending September 2021 and forms part of the noise monitoring program for the quarry.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA), Environmental Protection Licence (EPL 3293);
- NSW Department of Planning and Environment, Development Consent (SSD 6422), 2015;
- Teven Quarry Noise Management Plan Revision 1, 4 May 2016 (EMM); and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.





2 Noise Criteria

Schedule 3 of the Teven Quarry Development Consent (2015), outlines the applicable noise criteria for residential receivers surrounding the quarry site.

 Table 1 reproduces relevant criteria for each of the receivers as outlined in the quarry's Development

 Consent.

Table 1 Noise Criteria						
	Quarry Operations					
l ocation ¹	Period: Day	Period: Evening				
	7am – 6pm	6pm – 10pm				
	dB LAeq(15min)	dB LAeq(15min)				
R3, R4, R13, R15, R16, R17, R18, R20	38	35				
All other receivers	37	35				

Note 1: Receiver locations are shown in Figure 1.





3 Methodology

3.1 Locality

The quarry is located in Teven, NSW approximately 7km west of Ballina, NSW. Receivers in the locality surrounding the quarry are primarily rural residential. The surroundings of the quarry are primarily rural. The monitoring locations with respect to the quarry are presented in the locality plan shown in **Figure 1**.

3.2 Noise Monitoring Locations

Five monitoring locations have been selected as part of the NMA in accordance with the NMP. The selected monitoring locations are presented in **Table 2** along with the noise sensitive receivers they represent.

Table 2 Monitoring Locations (MGA56 Coordinates)								
Location	Nearest Receiver	Easting, m	Northing, m					
NM1	R7	546737	6809918					
NM2	R3/R4	548892	6810285					
NM3	R2	547781	6808991					
NM4	R10	547576	6810379					
NM5	R14	548100	6810792					


3.3 Assessment Methodology

Attended noise surveys were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise and the NPI. Measurements were carried out using a Svantek Type 1, 971 noise analyser on Tuesday 20 July 2021 and Wednesday 21 July 2021. Acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA.

As per the Noise Management Plan, two daytime measurements were conducted at each monitoring location. It is noted that the quarry was not operating during the evening period, however two measurements were conducted at each monitoring location as per the requirements of the EPL.

Measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to determine the LAeq(15min) noise contribution for comparison against the relevant criteria. Where the quarry was inaudible, the contribution is estimated to be at least 10dB below the ambient noise level.



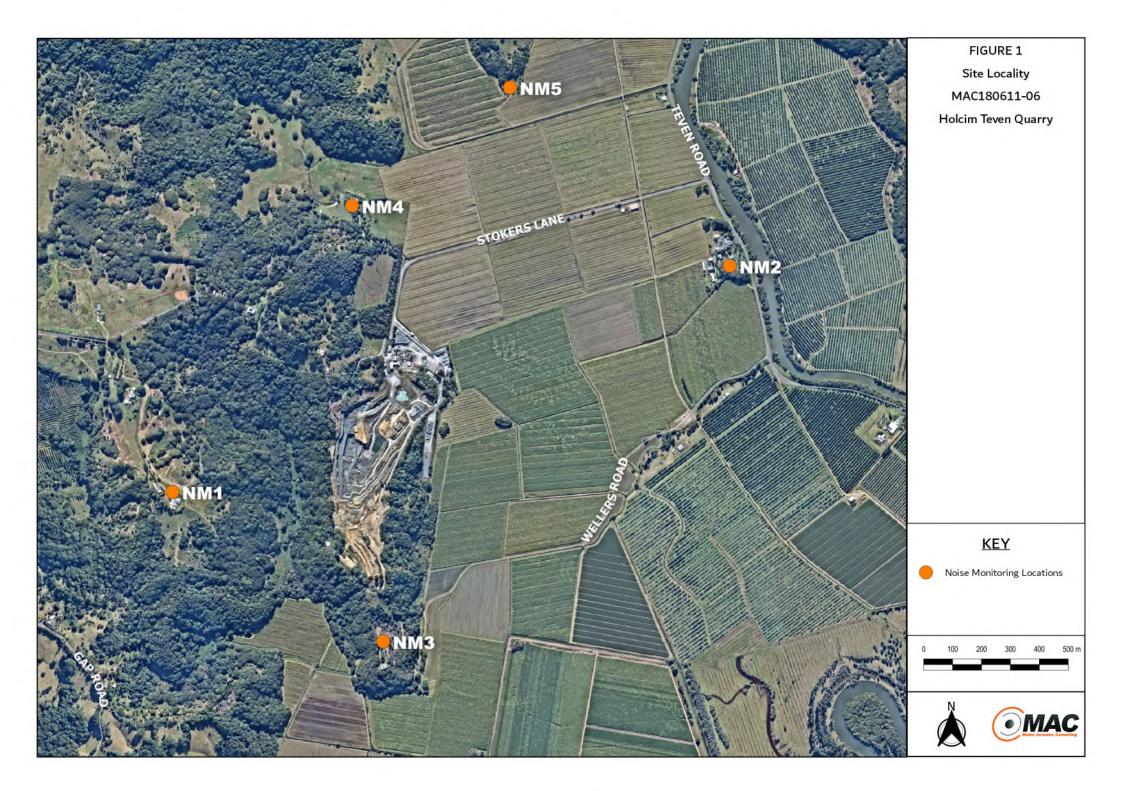

4 Results

4.1 Assessment Results - Location NM1

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM1 are presented in **Table 3**.

08:43	75	LAeq 49 Aeq(15min) (LA90 38 Contribution	Meteorology WD: W WS: 0.8m/s Rain: Nil	Description and SPL, dBA Birds 34-62 Wind in trees 34-44 Traffic 34-75 Quarry Inaudible <30
(Day) Tever 08:43	-			WS: 0.8m/s	Wind in trees 34-44 Traffic 34-75 Quarry Inaudible
08:43	n Quarry Lł	Aeq(15min)	Contribution		<30
(Day)	76	49	40	WD: W WS: 0.8m/s Rain: Nil	Birds 36-48 Wind in trees 36-52 Traffic 36-76 Quarry Inaudible
Tever	n Quarry LA	Aeq(15min)	Contribution		<30
18:32 (Evening)	64	41	27	WD: W WS: 0.4m/s Rain: Nil	Traffic 26-64 Wind in trees 26-34 Birds 26-40 Quarry Inaudible
Tever	n Quarry LA	Aeq(15min)	Contribution		Quarry not operational
18:47 (Evening)	61	38	26	WD: W WS: 0.5m/s Rain: Nil	Traffic 26-61 Insects 24-30 Wind in trees 24-32 Quarry Inaudible
	18:32 (Evening) Tever 18:47 (Evening)	18:32 (Evening) Teven Quarry L/ 18:47 (Evening)	18:32 (Evening) Teven Quarry LAeq(15min) 18:47 (Evening) 61 38	64 41 27 (Evening) Teven Quarry LAeq(15min) Contribution 18:47 61 38 26	Teven Quarry LAeq(15min) Contribution WD: W 18:32 64 41 27 WS: 0.4m/s (Evening) Rain: Nil Teven Quarry LAeq(15min) Contribution WD: W 18:47 61 38 26 WS: 0.5m/s (Evening) 61 38 26 WS: 0.5m/s (Evening) Rain: Nil



4.2 Assessment Results - Location NM2

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM2 are presented in **Table 4**.

Table 4 Ope	Table 4 Operator-Attended Noise Survey Results – Location NM2						
Date	Time (hrs)	Descript	or (dBA re	20 µPa)	Meteorology	Description and SPL, dBA	
Duto		LAmax	LAeq	LA90			
						Wind in trees 42-48	
					WD: W	Dog bark 42-58	
21/07/2021	09:10	86	65	46	WD. W WS: 2m/s	Traffic 42-86	
21/07/2021	(Day)	00	60	40	Rain: Nil	Birds 42-68	
					Rain. Nii	Aircraft 39-62	
						Quarry Inaudible	
	Teven C	uarry LA _{eq}	(15min) Coi	ntribution		<30	
	09:25			47	WD: W WS: 2.5m/s Rain: Nil	Wind in trees 44-58	
01/07/0001						Birds 44-72	
21/07/2021	(Day)	85	66			Traffic 44-85	
						Quarry Inaudible	
	Teven C	uarry LA _{eq}	(15min) Coi	ntribution		<30	
					WD: W	Wind in trees 32-46	
20/07/2021	19:15	15	20			WD. W WS: 1.2m/s	Traffic 32-88
20/07/2021	(Evening)	88	60	34		Birds 32-38	
					Rain: Nil	Quarry Inaudible	
	Teven C	uarry LA _{eq}	(15min) Coi	ntribution		Quarry not operational	
	10.20				WD: W	Wind in trees 30-50	
20/07/2021	19:30	50	39	33	WS: 1.2m/s	Insects <30	
	(Evening)				Rain: Nil	Quarry Inaudible	
	Teven C	Quarry not operational					



4.3 Assessment Results - Location NM3

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM3 are presented in **Table 5**.

Table 5 Operator-Attended Noise Survey Results – Location NM3						
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
Date	Time (fills)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
	00.47				WD: W	Wind in trees 36-55 Birds 36-56
21/07/2021	09:47 (Day)	58	41	37	WS: 1.2m/s Rain: Nil	Aircraft 36-58
	Teven	Quarry LAe	q(15min) Co	ontribution		Quarry Inaudible <30
21/07/2021	10:02 (Day)	57	41	37	WD: W WS: 1m/s Rain: Nil	Wind in trees 35-46 Birds 35-57 Quarry Inaudible
Teven Quarry LAeq(15min) Contribution						<30
20/07/2021	19:51 (Evening)	70	46	28	WD: W WS: 0.4m/s Rain: Nil	Operator 55-57 Traffic 28-48 Aircraft 54-70 Quarry Inaudible
	Teven	Quarry LAe	q(15min) Co	ontribution		Quarry not operational
20/07/2021	20:06 (Evening)	47	28	27	WD: W WS: 0.3m/s Rain: Nil	Traffic 27-47 Insects 26-29 Quarry Inaudible
	Teven	Quarry not operational				



4.4 Assessment Results - Location NM4

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM4 are presented in **Table 6**.

Date	Time (hre)	Descript	or (dBA re	20 µPa)	Meteorology	Description and CDL dDA
Duto	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
						Wind in trees 44-56
						Traffic 44-83
	10:25				WD: W	Birds 44-52
21/07/2021		83	59	45	WS: 2m/s	Holcim Crushing <37-41
	(Day)				Rain: Nil	(constant)
						Holcim FEL 37-41
						(20 seconds)
	Teven C	uarry LA _{eq}	(15min) Coi	ntribution		37 ¹
				46		Wind in trees 41-58
		81	60			Birds 41-55
	10.40				WD: W	Traffic 41-81
21/07/2021	10:40				WS: 2m/s	Holcim Tipping 36-46
	(Day)				Rain: Nil	(5 seconds)
						Holcim Crushing <37-41
						(constant)
	Teven C	uarry LA _{eq}	(15min) Coi	ntribution		37 ¹
						Insects <26
20/07/2021	20:29	41	33		WD: W	Traffic 26-29
20/07/2021	(Evening)	41	33	29	WS: 0.3m/s Rain: Nil	Birds 26-41
					Rain. Nii	Quarry Inaudible
	Teven C	uarry LAeq	(15min) Coi	ntribution		Quarry not operational
						Birds 27-43
20/07/2021	20:44	43	31	26	WD: W WS: 0.4m/s	Insects <27
20/07/2021	(Evening)	43		20	Rain: Nil	Traffic 26-32
					Kain. Nii	Quarry Inaudible
	Teven C	uarry LAeq	(15min) Coi	ntribution		Quarry not operational

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods. Note 1: Contribution calculated at 108 Stockers Lane.



4.5 Assessment Results - Location NM5

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM5 are presented in **Table 7**.

Table 7 Ope	erator-Attend	ed Noise	Survey R	esults – Lo	cation NM5	
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
	Time (fills)	LAmax	LAeq	LA90	Weteorology	Description and Sr E, dBA
						Wind in trees 41-56
	11.00				WD: W	Birds 41-57
21/07/2021	11:06	83	59	45	WS: 2m/s	Traffic 41-83
	(Day)				Rain: Nil	Aircraft 41-47
						Quarry Inaudible
	Teven	ı Quarry LA	eq(15min) C	ontribution		<30
				44		Wind in trees 41-56
	11.01		59		WD: W	Birds 41-53
21/07/2021	11:21 (Day)	86			WS: 2m/s	Traffic 41-86
	(Day)				Rain: Nil	Aircraft 41-60
						Quarry Inaudible
Teven Quarry LAeq(15min) Contribution						<30
	21:04	21:04 77 (Evening)	47	29		Wind in trees 26-42
					WD: W	Insects 26-30
20/07/2021	(Evening)				WS: 0.4m/s Rain: Nil	Traffic 26-77
						Quarry Inaudible
	Teven	Quarry LA	eq(15min) C	ontribution		Quarry not operational
						Traffic 23-81
20/07/2024	21:19	0.1	FO	06	WD: W	Insects 23-26
20/07/2021	(Evening)	81	50	26	WS: 0.4m/s	Wind in trees 23-32
					Rain: Nil	Quarry Inaudible
	Teven	Quarry LA	eq(15min) C	ontribution		Quarry not operational





5 Discussion

5.1 Discussion of Results - Location NM1

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 21 July 2021. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, wind in trees, traffic and insects.

5.2 Discussion of Results - Location NM2

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 21 July 2021. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included wind in trees, dog barking, traffic, birds and aircraft.

5.3 Discussion of Results - Location NM3

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 21 July 2021. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included wind in trees, birds, aircraft, operator noise and traffic.



5.4 Discussion of Results - Location NM4

Quarry noise emissions were audible during the daytime noise measurements conducted on Wednesday 21 July 2021. Quarry noise contributions were estimated at 37dBA for both measurements and therefore satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included front end loader, heavy vehicles tipping, and the processing plant. Non quarry noise sources included wind in trees, traffic, birds and insects.

5.5 Discussion of Results - Location NM5

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 21 July 2021. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included wind in trees, birds, traffic, aircraft and insects.



6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Holcim (Australia) Pty Ltd at Teven Quarry, Teven, NSW. The assessment was completed to determine the quarry's compliance with the relevant criteria outlined in their Development Consent for the relevant surrounding residential receivers during Quarter 3, ending September 2021.

Attended noise measurements were undertaken on Tuesday 20 July 2021 and Wednesday 21 July 2021 at representative monitoring locations with quarry noise contributions compared against the relevant criteria. The assessment has identified that noise emissions generated by Teven Quarry complied with relevant noise criteria specified in the Development Consent at all assessed residential receivers.





Appendix A - Glossary of Terms



 Table A1 provides a number of technical terms have been used in this report.


Term	Description						
1/3 Octave	Single octave bands divided into three parts						
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice						
	the lower frequency limit.						
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for						
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90						
	statistical noise levels.						
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site						
	for a significant period of time (that is, wind occurring more than 30% of the time in any						
	assessment period in any season and/or temperature inversions occurring more than 30% of the						
	nights in winter).						
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many						
	sources located both near and far where no particular sound is dominant.						
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human						
	ear to noise.						
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the						
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency						
	response of the human ear.						
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.						
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second						
	equals 1 hertz.						
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of						
	maximum noise levels.						
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.						
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a						
	source, and is the equivalent continuous sound pressure level over a given period.						
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a						
	measuring interval.						
RBL	The Rating Background Level (RBL) is an overall single figure background level representing						
	each assessment period over the whole monitoring period. The RBL is used to determine the						
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.						
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a						
	fundamental location of the source and is independent of the surrounding environment. Or a						
	measure of the energy emitted from a source as sound and is given by :						
	= 10.log10 (W/Wo)						
	Where : W is the sound power in watts and Wo is the sound reference power at 10-12 watts.						



Table A2 Common Noise Sources and Their Typical Sound I	Pressure Levels (SPL), dBA
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

 Table A2 provides a list of common noise sources and their typical sound level.



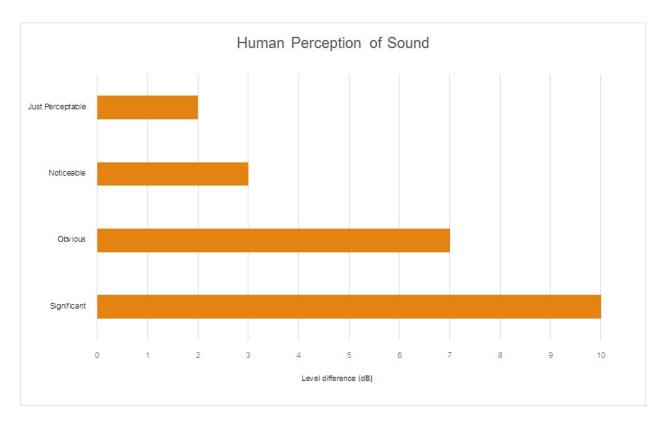



Muller Acoustic Consulting Pty Ltd PO Box 678, Kotara NSW 2289 ABN: 36 602 225 132 Ph: +61 2 4920 1833 www.mulleracoustic.com

