# Noise Monitoring Assessment

Teven Quarry, Teven, NSW Quarter 1 Ending March 2021.



Prepared for: Holcim (Australia) Pty Ltd March 2021 MAC180611-06RP11

## Document Information

### Noise Monitoring Assessment

### Teven Quarry, Teven, NSW

## Quarter 1 Ending March 2021

Prepared for: Holcim (Australia) Pty Ltd

Prepared by: Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-06RP11	Final	31 March 2021	Nicholas Shipman	N.Shp	Rod Linnett	RHLatt

#### DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



#### CONTENTS

1	11	NTRODUCTION	5
2	Ν	IOISE CRITERIA	7
3	Ν	IETHODOLOGY	9
	3.1	LOCALITY	9
	3.2	NOISE MONITORING LOCATIONS	9
	3.3	ASSESSMENT METHODOLOGY	9
4	F	RESULTS	. 11
	4.1	ASSESSMENT RESULTS - LOCATION NM1	. 11
	4.2	ASSESSMENT RESULTS - LOCATION NM2	. 12
	4.3	ASSESSMENT RESULTS - LOCATION NM3	. 13
	4.4	ASSESSMENT RESULTS - LOCATION NM4	. 14
	4.5	ASSESSMENT RESULTS - LOCATION NM5	. 15
5	C	DISCUSSION	. 17
	5.1	DISCUSSION OF RESULTS - LOCATION NM1	. 17
	5.2	DISCUSSION OF RESULTS - LOCATION NM2	. 17
	5.3	DISCUSSION OF RESULTS - LOCATION NM3	. 17
	5.4	DISCUSSION OF RESULTS - LOCATION NM4	. 18
	5.5	DISCUSSION OF RESULTS - LOCATION NM5	. 18
6	C	CONCLUSION	. 19

APPENDIX A - GLOSSARY OF TERMS





#### 1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for the quarterly period ending March 2021 for Teven Quarry (the 'quarry'), Teven, NSW.

The monitoring has been conducted in accordance with the Teven Noise Management Plan (NMP) and in general accordance with relevant conditions outlined in the Development Consent (ref: SSD 6422) at five representative monitoring locations. This assessment has been undertaken during Quarter 1, ending March 2021 and forms part of the noise monitoring program for the quarry.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA), Environmental Protection Licence (EPL 3293);
- NSW Department of Planning and Environment, Development Consent (SSD 6422), 2015;
- Teven Quarry Noise Management Plan Revision 1, 4 May 2016 (EMM); and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.





#### 2 Noise Criteria

Schedule 3 of the Teven Quarry Development Consent (2015), outlines the applicable noise criteria for residential receivers surrounding the quarry site.

 Table 1 reproduces relevant criteria for each of the receivers as outlined in the quarry's Development

 Consent.

Table 1 Noise Criteria						
	Quarry Operations					
l ocation <sup>1</sup>	Period: Day	Period: Evening				
	7am – 6pm	6pm – 10pm				
	dB LAeq(15min)	dB LAeq(15min)				
R3, R4, R13, R15, R16, R17, R18, R20	38	35				
All other receivers	37	35				

Note 1: Receiver locations are shown in Figure 1.





#### 3 Methodology

#### 3.1 Locality

The quarry is located in Teven, NSW approximately 7km west of Ballina, NSW. Receivers in the locality surrounding the quarry are primarily rural residential. The surroundings of the quarry are primarily rural. The monitoring locations with respect to the quarry are presented in the locality plan shown in **Figure 1**.

#### 3.2 Noise Monitoring Locations

Five monitoring locations have been selected as part of the NMA in accordance with the NMP. The selected monitoring locations are presented in **Table 2** along with the noise sensitive receivers they represent.

Table 2 Monitoring Locations (MGA56 Coordinates)							
Location	Nearest Receiver	Easting, m	Northing, m				
NM1	R7	546737	6809918				
NM2	R3/R4	548892	6810285				
NM3	R2	547781	6808991				
NM4	R10	547576	6810379				
NM5	R14	548100	6810792				


#### 3.3 Assessment Methodology

Attended noise surveys were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise and the NPI. Measurements were carried out using a Svantek Type 1, 971 noise analyser on Wednesday 24 March 2021. Acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA.

As per the Noise Management Plan, two daytime measurements were conducted at each monitoring location. It is noted that the quarry was not operating during the evening period, however two measurements were conducted at each monitoring location as per the requirements of the EPL.

Measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to determine the LAeq(15min) noise contribution for comparison against the relevant criteria. Where the quarry was inaudible, the contribution is estimated to be at least 10dB below the ambient noise level.



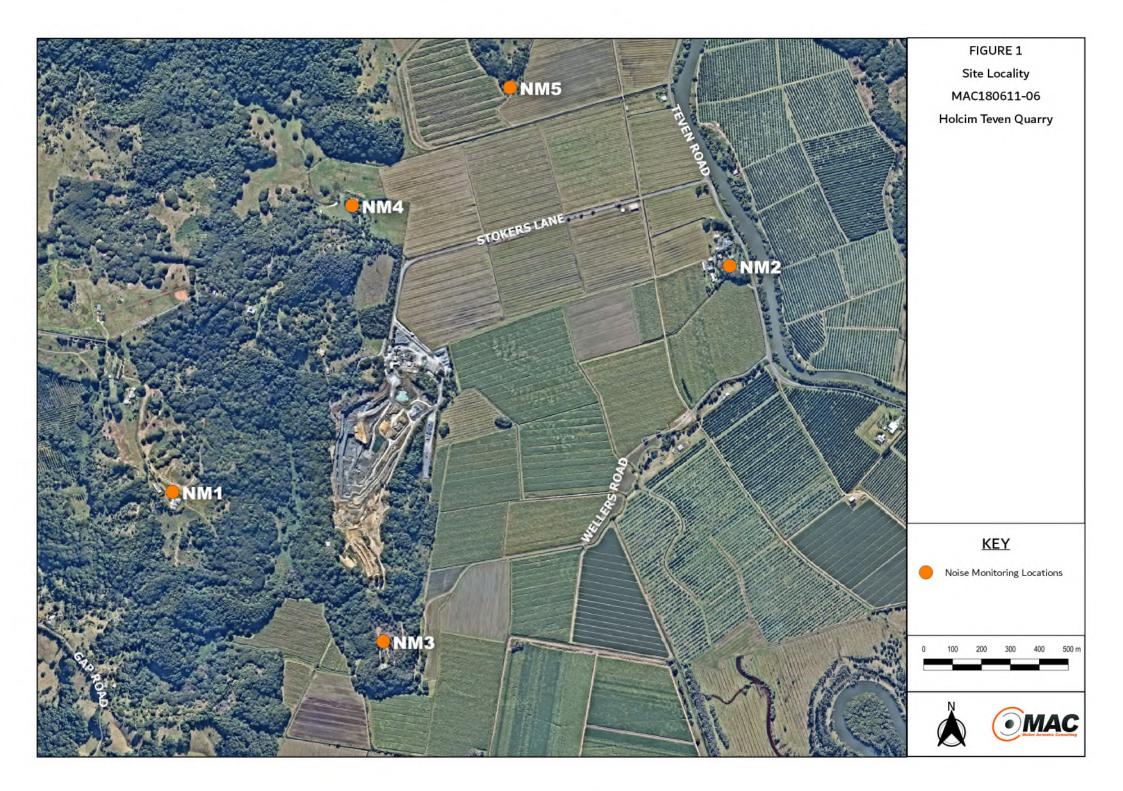

#### 4 Results

#### 4.1 Assessment Results - Location NM1

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM1 are presented in **Table 3**.

	T: (1 )	Descriptor (dBA re 20 µPa)				
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
						Birds 37-70
04/02/0001	07:26	70	E A	20	WD: W	Insects 37-53
24/03/2021	(Day)	70	54	39	WS: 0.1m/s	Traffic 37-65
					Rain: Nil	Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		<35
24/03/2021	07:41	63	54	37	WD: W WS: 0.1m/s	Insects 49-56 Birds 36-54
(Day)	(Day)	/)			Rain: Nil	Traffic 32-63 Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		<35
	18:08 (Evening)		58	41		Insects 38-46
						Birds 38-44
		86 J)			WD: NW	Traffic <38
24/03/2021					WS: 0.4m/s	Dog bark 38-86
					Rain: Nil	Local residential noise 38-5
						Wind <42
						Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		Quarry not operational
						Wind 38-44
						Insects 42-48
04/02/2024	18:23	66	FO	4.4	WD: NW	Birds <44
24/03/2021	(Evening)	66	52	44	WS: 0.3m/s	Traffic 41-66
					Rain: Nil	Aircraft 41-52
						Quarry Inaudible



#### 4.2 Assessment Results - Location NM2

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM2 are presented in **Table 4**.

Dete	Time ( / )	Descript	or (dBA re	20 µPa)	Masta a vala av i	
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
						Traffic 43-88
					WD: W	Birds 41-57
24/03/2021	08:09	88	66	41	WD: W WS: 0.1m/s	Aircraft 41-48
24/03/2021	(Day)	00	00	41	Rain: Nil	Holcim processing 33-37
					Rain. Nii	Local residential noise 43-5
						Insects 38-46
	Teve	n Quarry L	Aeq(15min)	Contribution		<37
	08:24 (Day)					Traffic 38-88
		88	66	66 40		Birds 40-61
					WD: W	Insects <40
24/03/2021					WS: 0.1m/s	Local residential noise 46-5
	(Day)				Rain: Nil	Dogs 42-45
						Aircraft 38-40
						Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		<35
	18:50 (Evening)			47	WD: NW WS: 0.2m/s Rain: Nil	Insects 45-48
24/03/2021			93 63			Traffic 45-93
24/00/2021		55				Birds 45-49
						Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational
						Insects 46-52
	19:05				WD: NW	Traffic 46-87
24/03/2021	(Evening)	87	60	45	WS: 0.2m/s	Birds 46-67
	(Evening)				Rain: Nil	Aircraft 46-53
						Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		Quarry not operational



#### 4.3 Assessment Results - Location NM3

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM3 are presented in **Table 5**.

Table 5 Operator-Attended Noise Survey Results – Location NM3						
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
Date	nine (nis)	LAmax	LAeq	LA90	Weteorology	Description and SFL, dBA
24/03/2021	08:44 (Day)	62	43	38	WD: W WS: 0.1m/s Rain: Nil	Birds 36-62 Insects 36-45 Holcim processing 32-36 Holcim FEL 32-36
	Teve	n Quarry L/	Aeq(15min)	Contribution		<36
24/03/2021	08:59 (Day)	61	40	34	WD: W WS: 0.1m/s Rain: Nil	Holcim processing 32-36 Insects 36-42 Birds 40-61
	Teve	n Quarry L/	Aeq(15min)	Contribution		<36
24/03/2021	19:27 (Evening)	65	60	55	WD: NW WS: 0.1m/s Rain: Nil	Insects 48-65 Traffic <48 Quarry Inaudible
	Teve	n Quarry L/	Aeq(15min)	Contribution		Quarry not operational
24/03/2021	19:42 (Evening)	65	62	60	WD: NW WS: 0.1m/s Rain: Nil	Insects 46-65 Quarry Inaudible
	Teve		Quarry not operational			



#### 4.4 Assessment Results - Location NM4

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM4 are presented in **Table 6**.

	T: (1 )	Descriptor (dBA re 20 µPa)				Description and ODL aDA					
Date Time (hrs)	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA					
						Holcim FEL 36-50					
						Holcim processing 35-37					
04/02/2021	09:23	77	50	44	WD: W	Insects <38					
24/03/2021	(Day)	77	53	41	WS: 0.1m/s	Birds 39-46					
					Rain: Nil	Traffic 38-77					
						Local residential noise <38					
	Teven G	uarry LAeq	(15min) Coi	ntribution		37					
24/03/2021			78 59	41		Local residential noise <37					
	00.20				WD: W	Holcim processing 34-41					
	09:38 (Day)	78			WS: 0.1m/s	Insects 37-42					
	(Day)				Rain: Nil	Birds 37-45					
						Traffic 37-78					
Teven Quarry LAeq(15min) Contribution						37					
					WD: NW	Insects 49-52					
24/03/2021	20:05	54	51	50	WD. NW WS: 0.1m/s	Traffic <49					
24/03/2021	(Evening)	54	51	50	Rain: Nil	Birds 49-54					
					Rain. Nii	Quarry Inaudible					
	Teven G	uarry LAeq	(15min) Coi	ntribution		Quarry not operational					
	20:20				WD: NW	Insects 49-52					
24/03/2021		60	50	49	WS: 0.1m/s	Birds 49-60					
	(Evening)				Rain: Nil	Quarry Inaudible					
	Teven G	Quarry LAeq	(15min) Coi	Teven Quarry LAeq(15min) Contribution							



#### 4.5 Assessment Results - Location NM5

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM5 are presented in **Table 7**.

Table 7 Operator-Attended Noise Survey Results – Location NM5								
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and CDL dDA		
Dale	Time (fills)	LAmax	LAeq	LA90	weteorology	Description and SPL, dBA		
24/03/2021	10:11 (Day)	60	41	34	WD: W WS: 0.1m/s Rain: Nil	Birds 36-44 Insects 31-36 Holcim processing 31-36 Aircraft 38-60		
	Teven	Quarry LA	eq(15min) C	Contribution		<35		
24/03/2021	10:26 (Day)	57	40	35	WD: W WS: 1m/s Rain: Nil	Birds 36-48 Insects 36-40 Holcim processing 32-36 Wind 36-57		
	Teven	ı Quarry LA	eq(15min) C	Contribution		<35		
24/03/2021	20:41 (Evening)	55	50	48	WD: NW WS: 0.1m/s Rain: Nil	Insects 47-55 Traffic <47 Quarry Inaudible		
	Teven	i Quarry LA	eq(15min) C	Contribution		Quarry not operational		
24/03/2021	20:56 (Evening)	53	49	47	WD: NW WS: 0.1m/s Rain: Nil	Insects 47-52 Traffic <47 Quarry Inaudible		
	Teven Quarry LAeq(15min) Contribution Quarry not operational							





#### 5 Discussion

#### 5.1 Discussion of Results - Location NM1

Quarry noise emissions were inaudible during the daytime measurements conducted on Wednesday 24 March 2021. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, insects, traffic, dogs barking, local residential noise, wind in trees and aircraft.

#### 5.2 Discussion of Results - Location NM2

Quarry noise emissions were audible during one of the daytime measurements conducted on Wednesday 24 March 2021. Quarry noise contributions were measured at <37dBA and therefore satisfied the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included the processing plant. Non quarry noise sources observed during the measurements included traffic, birds, aircraft, local residential noise, insects, and dogs barking.

#### 5.3 Discussion of Results - Location NM3

Quarry noise emissions were audible during the daytime noise measurements conducted on Wednesday 24 March 2021. Quarry noise contributions were estimated at <36dBA for both measurements and therefore satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included front end loader and the processing plant. Non quarry noise sources observed during the measurements included birds, insects, and traffic.



#### 5.4 Discussion of Results - Location NM4

Quarry noise emissions were audible during the daytime noise measurements conducted on Wednesday 24 March 2021. Quarry noise contributions were estimated at 37dBA for both measurements and therefore satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included front end loader and the processing plant. Non quarry noise sources included birds, aircraft, traffic, and insects.

#### 5.5 Discussion of Results - Location NM5

Quarry noise emissions were audible during the daytime measurements conducted on Wednesday 24 March 2021. Quarry noise contributions were estimated at <35dBA for both measurements and therefore satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Quarry noise sources observed during the measurements included the processing plant. Non-quarrying sources included insects, birds, traffic, wind in trees, and aircraft.



#### 6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Holcim (Australia) Pty Ltd at Teven Quarry, Teven, NSW. The assessment was completed to determine the quarry's compliance with the relevant criteria outlined in their Development Consent for the relevant surrounding residential receivers during Quarter 1, ending March 2021.

Attended noise measurements were undertaken on Wednesday 24 March 2021 at representative monitoring locations with quarry noise contributions compared against the relevant criteria. The assessment has identified that noise emissions generated by Teven Quarry complied with relevant noise criteria specified in the Development Consent at all assessed residential receivers.





## Appendix A - Glossary of Terms



 Table A1 provides a number of technical terms have been used in this report.


Term	Description					
1/3 Octave	Single octave bands divided into three parts					
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice					
	the lower frequency limit.					
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for					
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90					
	statistical noise levels.					
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site					
	for a significant period of time (that is, wind occurring more than 30% of the time in any					
	assessment period in any season and/or temperature inversions occurring more than 30% of the					
	nights in winter).					
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many					
	sources located both near and far where no particular sound is dominant.					
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human					
	ear to noise.					
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the					
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency					
	response of the human ear.					
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.					
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second					
	equals 1 hertz.					
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of					
	maximum noise levels.					
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.					
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a					
	source, and is the equivalent continuous sound pressure level over a given period.					
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a					
	measuring interval.					
RBL	The Rating Background Level (RBL) is an overall single figure background level representing					
	each assessment period over the whole monitoring period. The RBL is used to determine the					
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.					
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a					
	fundamental location of the source and is independent of the surrounding environment. Or a					
	measure of the energy emitted from a source as sound and is given by :					
	= 10.log10 (W/Wo)					
	Where : W is the sound power in watts and Wo is the sound reference power at 10-12 watts.					



Table A2 Common Noise Sources and Their Typical Sound I	Pressure Levels (SPL), dBA
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

 Table A2 provides a list of common noise sources and their typical sound level.



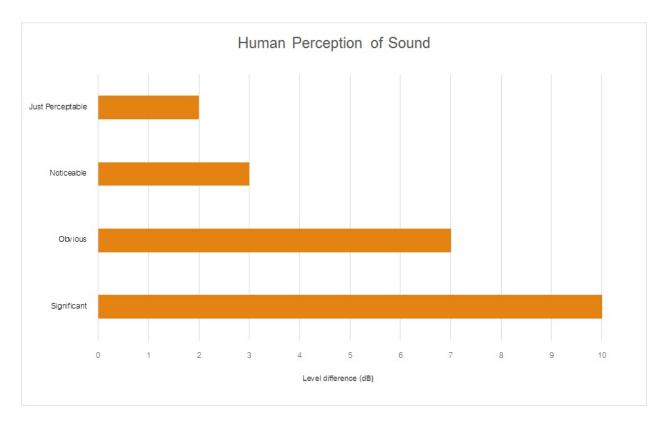



Muller Acoustic Consulting Pty Ltd PO Box 262, Newcastle NSW 2300 ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

