

Noise Monitoring Assessment

Teven Quarry, Teven, NSW
Quarter 2 Ending June 2020.



Document Information

Noise Monitoring Assessment

Teven Quarry, Teven, NSW

Quarter 2 Ending June 2020

Prepared for: Holcim (Australia) Pty Ltd



Prepared by: Muller Acoustic Consulting Pty Ltd

PO Box 262, Newcastle NSW 2300

ABN: 36 602 225 132

P: +61 2 4920 1833

www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-06RP8	Final	20 May 2020	Nicholas Shipman		Rod Linnett	

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.

CONTENTS

1	INTRODUCTION	5
2	NOISE CRITERIA	7
3	METHODOLOGY	9
3.1	LOCALITY	9
3.2	NOISE MONITORING LOCATIONS	9
3.3	ASSESSMENT METHODOLOGY	9
4	RESULTS	11
4.1	ASSESSMENT RESULTS - LOCATION N1	11
4.2	ASSESSMENT RESULTS - LOCATION N2	12
4.3	ASSESSMENT RESULTS - LOCATION N3	13
4.4	ASSESSMENT RESULTS - LOCATION N4	14
4.5	ASSESSMENT RESULTS - LOCATION N5	15
5	DISCUSSION	17
5.1	DISCUSSION OF RESULTS - LOCATION N1	17
5.2	DISCUSSION OF RESULTS - LOCATION N2	17
5.3	DISCUSSION OF RESULTS - LOCATION N3	17
5.4	DISCUSSION OF RESULTS - LOCATION N4	18
5.5	DISCUSSION OF RESULTS - LOCATION N5	18
6	CONCLUSION	19
APPENDIX A - GLOSSARY OF TERMS		

This page has been intentionally left blank

1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for the quarterly period ending June 2020 for Teven Quarry (the 'quarry'), Teven, NSW.

The monitoring has been conducted in accordance with the Teven Noise Management Plan and in general accordance with relevant conditions outlined in the Development Consent (ref: SSD 6422) at five representative monitoring locations. This assessment has been undertaken during Quarter 2, ending June 2020 and forms part of the noise monitoring program for the quarry.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Department of Planning and Environment, Development Consent (SSD 6422), 2015; and
- Australian Standard AS 1055:2018 - Acoustics - Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

This page has been intentionally left blank

2 Noise Criteria

Schedule 3 of the Teven Quarry Development Consent (2015), outlines the applicable noise criteria for residential receivers surrounding the quarry site.

Table 1 reproduces relevant criteria for each of the receivers as outlined in the quarry's Development Consent.

Table 1 Noise Criteria		
Location ¹	Quarry Operations	
	Period: Day	Period: Evening
	7am – 6pm	6pm – 10pm
	dB LAeq(15min)	dB LAeq(15min)
R3, R4, R13, R15, R16, R17, R18, R20	38	35
All other receivers	37	35

Note 1: Receiver locations are shown in Figure 1.

This page has been intentionally left blank

3 Methodology

3.1 Locality

The quarry is located in Teven, NSW approximately 7km west of Ballina, NSW. Receivers in the locality surrounding the quarry are primarily rural residential. The surroundings of the quarry are primarily rural. The monitoring locations with respect to the quarry are presented in the locality plan shown in **Figure 1**.

3.2 Noise Monitoring Locations

Five monitoring locations have been selected as part of the NMA in accordance with the NMP. The selected monitoring locations are presented in **Table 2** along with the noise sensitive receivers they represent.

Table 2 Monitoring Locations (MGA56 Coordinates)			
Location	Nearest Receiver	Easting, m	Northing, m
N1	R7	547017	6810098
N2	R3/R4	548877	6810290
N3	R2	548642	6810801
N4	R10	547729	6810226
N5	R15	547793	6808998

3.3 Assessment Methodology

Attended noise surveys were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise and the NPI. Measurements were carried out using a Svantek Type 1, 971 noise analyser on Tuesday 12 May 2020 and Wednesday 13 May 2020. Acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed $\pm 0.5\text{dBA}$.

As per the Noise Management Plan, two daytime measurements were conducted at each monitoring location. It is noted that the quarry was not operating during the evening period, however two measurements were conducted at each monitoring location as per the requirements of the EPL.

Measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to determine the $\text{LA}_{\text{eq}}(15\text{min})$ noise contribution for comparison against the relevant criteria. Where the quarry was inaudible, the contribution is estimated to be at least 10dB below the ambient noise level.

FIGURE 1
LOCALITY PLAN
REF: MAC180611-06

0 150m



KEY



RECEIVER LOCATION



SITE LOCATION

4 Results

4.1 Assessment Results - Location N1

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location N1 are presented in **Table 3**.

Table 3 Operator-Attended Noise Survey Results – Location N1

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA						
		L _A max	L _A eq	L _A 90								
13/05/2020	09:53 (Day)	61	38	31	WD: W WS: 1m/s Rain: Nil	Birds 29-61						
						Insects <29						
						Traffic <30						
						Wind 29-38						
						Aircraft 32-48						
						Quarry Inaudible						
						Teven Quarry L _A eq(15min) Contribution						
13/05/2020	10:08 (Day)	74	47	30	WD: W WS: 1m/s Rain: Nil	Insects <29						
						Birds 28-65						
						Traffic 30-74						
						Quarry Inaudible						
						Teven Quarry L _A eq(15min) Contribution						
						12/05/2020	18:12 (Evening)	74	50	40	WD: W WS: 1.5m/s Rain: Nil	Wind 41-44
												Traffic 42-72
Aircraft 42-46												
Insects <41												
Quarry Inaudible												
Teven Quarry L _A eq(15min) Contribution												
12/05/2020	18:27 (Evening)	74	52	42	WD: W WS: 1.5m/s Rain: Nil							Wind 44-48
						Insects <44						
						Traffic 44-74						
						Aircraft <44						
						Quarry Inaudible						
						Teven Quarry L _A eq(15min) Contribution						

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.2 Assessment Results - Location N2

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location N2 are presented in **Table 4**.

Table 4 Operator-Attended Noise Survey Results – Location N2

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA					
		L _A max	L _A eq	L _A 90							
13/05/2020	10:32 (Day)	89	66	36	WD: W WS: 0.5m/s Rain: Nil	Traffic 34-89					
						Birds 38-52					
						Dog 35-46					
						Aircraft 35-46					
						Holcim processing just audible ~36					
						Local residential noise 36-48					
						Teven Quarry L _A eq(15min) Contribution					
13/05/2020	10:47 (Day)	88	65	37	WD: W WS: 0.5m/s Rain: Nil	Traffic 38-88 Birds 36-67 Local residential noise 38-56 Quarry Inaudible					
Teven Quarry L _A eq(15min) Contribution						<30					
12/05/2020	18:57 (Evening)	81	54	35	WD: W WS: 0.1m/s Rain: Nil	Insects <34 Aircraft 36-44 Traffic 36-81 Quarry Inaudible					
						Teven Quarry L _A eq(15min) Contribution					
						Quarry not operational					
						12/05/2020	19:12 (Evening)	81	54	34	WD: W WS: 0.1m/s Rain: Nil
Teven Quarry L _A eq(15min) Contribution											
Quarry not operational											

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.3 Assessment Results - Location N3

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location N3 are presented in **Table 5**.

Table 5 Operator-Attended Noise Survey Results – Location N3

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
		L _A max	L _A eq	L _A 90		
13/05/2020	11:10 (Day)	55	37	26	WD: W	Birds 27-38
					WS: 0.5m/s	Insects <27
					Rain: Nil	Holcim tipping 30-34
						Aircraft 32-54
Teven Quarry L _A eq(15min) Contribution						32
13/05/2020	11:26 (Day)	61	38	27	WD: W	Birds 27-51
					WS: 0.5m/s	Insects <27
					Rain: Nil	Holcim equipment 30-36
						Traffic 32-61
Teven Quarry L _A eq(15min) Contribution						33
12/05/2020	19:32 (Evening)	52	41	39	WD: W	Traffic 38-52
					WS: 0.1m/s	Insects <38
					Rain: Nil	Quarry Inaudible
Teven Quarry L _A eq(15min) Contribution						Quarry not operational
12/05/2020	19:47 (Evening)	45	40	37	WD: W	Traffic 36-45
					WS: 0.1m/s	Insects <36
					Rain: Nil	Quarry Inaudible
Teven Quarry L _A eq(15min) Contribution						Quarry not operational

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.4 Assessment Results - Location N4

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location N4 are presented in **Table 6**.

Table 6 Operator-Attended Noise Survey Results – Location N4

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}		
13/05/2020	11:48 (Day)	82	59	45	WD: W	Holcim crushing 47-53
					WS: 0.1m/s	Traffic 45-82
					Rain: Nil	Insects <45
						Birds <45
Teven Quarry L _{Aeq} (15min) Contribution						42-43
13/05/2020	12:03 (Day)	77	53	43	WD: W	Holcim crushing 43-48
					WS: 0.1m/s	Insects <43
					Rain: Nil	Traffic 43-77
					Teven Quarry L _{Aeq} (15min) Contribution	
12/05/2020	20:10 (Evening)	53	36	32	WD: W	Traffic 34-53
					WS: 0.1m/s	Insects <34
					Rain: Nil	Quarry Inaudible
					Teven Quarry L _{Aeq} (15min) Contribution	
12/05/2020	20:25 (Evening)	47	35	32	WD: W	Traffic 32-47
					WS: 0.1m/s	Insects <32
					Rain: Nil	Quarry Inaudible
					Teven Quarry L _{Aeq} (15min) Contribution	

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

4.5 Assessment Results - Location N5

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location N5 are presented in **Table 7**.

Table 7 Operator-Attended Noise Survey Results – Location N5

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			Meteorology	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}		
13/05/2020	12:23 (Day)	86	63	41	WD: W	Traffic 38-86
					WS: 0.1m/s	Industrial noise 38-46
					Rain: Nil	Insects <38
						Quarry Inaudible
Teven Quarry L _{Aeq} (15min) Contribution						<30
13/05/2020	12:38 (Day)	86	63	36	WD: W	Traffic 38-86
					WS: 0.1m/s	Birds 38-52
					Rain: Nil	Aircraft 38-59
						Insects <38
						Industrial noise 38-48
						Quarry Inaudible
Teven Quarry L _{Aeq} (15min) Contribution						<30
12/05/2020	20:45 (Evening)	85	56	34	WD: W	Traffic 32-85
					WS: 0.1m/s	Insects <32
					Rain: Nil	Quarry Inaudible
					Teven Quarry L _{Aeq} (15min) Contribution	
12/05/2020	21:00 (Evening)	51	36	33	WD: W	Insects <34
					WS: 0.1m/s	Traffic 34-51
					Rain: Nil	Quarry Inaudible
					Teven Quarry L _{Aeq} (15min) Contribution	

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.

This page has been intentionally left blank

5 Discussion

Attended noise measurements were undertaken on Tuesday 12 May 2020 and Wednesday 13 May 2020 at representative monitoring locations with quarry noise contributions compared against the relevant criteria. It is noted that during this survey period, measurements were generally dominated by high levels of insect noise, with further discussion of assessment results shown below.

5.1 Discussion of Results - Location N1

Quarry noise emissions were inaudible during the daytime measurements conducted on Tuesday 12 May 2020 and Wednesday 13 May 2020. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, insects, traffic, wind in trees and aircraft.

5.2 Discussion of Results - Location N2

Quarry noise emissions were audible during the daytime measurements conducted on Tuesday 12 May 2020 and Wednesday 13 May 2020. Quarry noise contributions satisfied the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included traffic, birds, dogs barking, aircraft, and local residential noise.

5.3 Discussion of Results - Location N3

Quarry noise emissions were audible during the daytime noise measurements conducted on Tuesday 12 May 2020 and Wednesday 13 May 2020. Quarry noise contributions satisfied the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, insects, aircraft, and traffic.

5.4 Discussion of Results - Location N4

Quarry noise emissions were audible during the daytime measurements conducted on Tuesday 12 May 2020 and Wednesday 13 May 2020. Front end loader movements, truck loading activities, and processing plant were audible during the two daytime measurements with an estimated contribution from 40dBA to 43dBA, therefore exceeding the daytime criteria. It was observed that the stockpiles were significantly reduced (approximately 30% capacity) than previous surveys which act as a barrier between the plant and the receiver. Typically, the quarry stockpiles around 12,000 tonnes of material on site, however, due to a recent high demand the stockpile has been reduced to less than 5,000 tonnes and will take three to four weeks to replenish the stockpile to full capacity. The plant manager was notified of the exceedance and will investigate other potential factors such as the integrity of plant enclosures and whether access doors are being closed. Over the next quarterly period, stockpile levels will be monitored more frequently and potential permanent solutions will be investigated.

The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non-quarrying sources observed during the measurements included traffic, insects, and birds.

5.5 Discussion of Results - Location N5

Quarry noise emissions were inaudible during the daytime measurements conducted on Tuesday 12 May 2020 and Wednesday 13 May 2020, therefore satisfying the daytime limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included traffic, industrial noise, insects, birds, and aircraft.

6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Holcim (Australia) Pty Ltd at Teven Quarry, Teven, NSW. The assessment was completed to determine the quarry's compliance with the relevant criteria outlined in their Development Consent for relevant surrounding residential receivers during Quarter 2, ending June 2020.

Attended noise measurements were undertaken on Tuesday 12 May 2020 and Wednesday 13 May 2020 at representative monitoring locations with quarry noise contributions compared against the relevant criteria. The assessment has identified that noise emissions generated by Teven Quarry generally complied with relevant noise criteria specified in the Development Consent at all assessed residential receivers, with the exception of N4 during the daytime period which had a noise contribution of 40dBA-43dBA for the daytime measurements over the next quarterly period, noise controls will be investigated including monitoring stockpile heights and integrity of plant enclosures to maintain compliance with noise goals.

This page has been intentionally left blank

Appendix A - Glossary of Terms

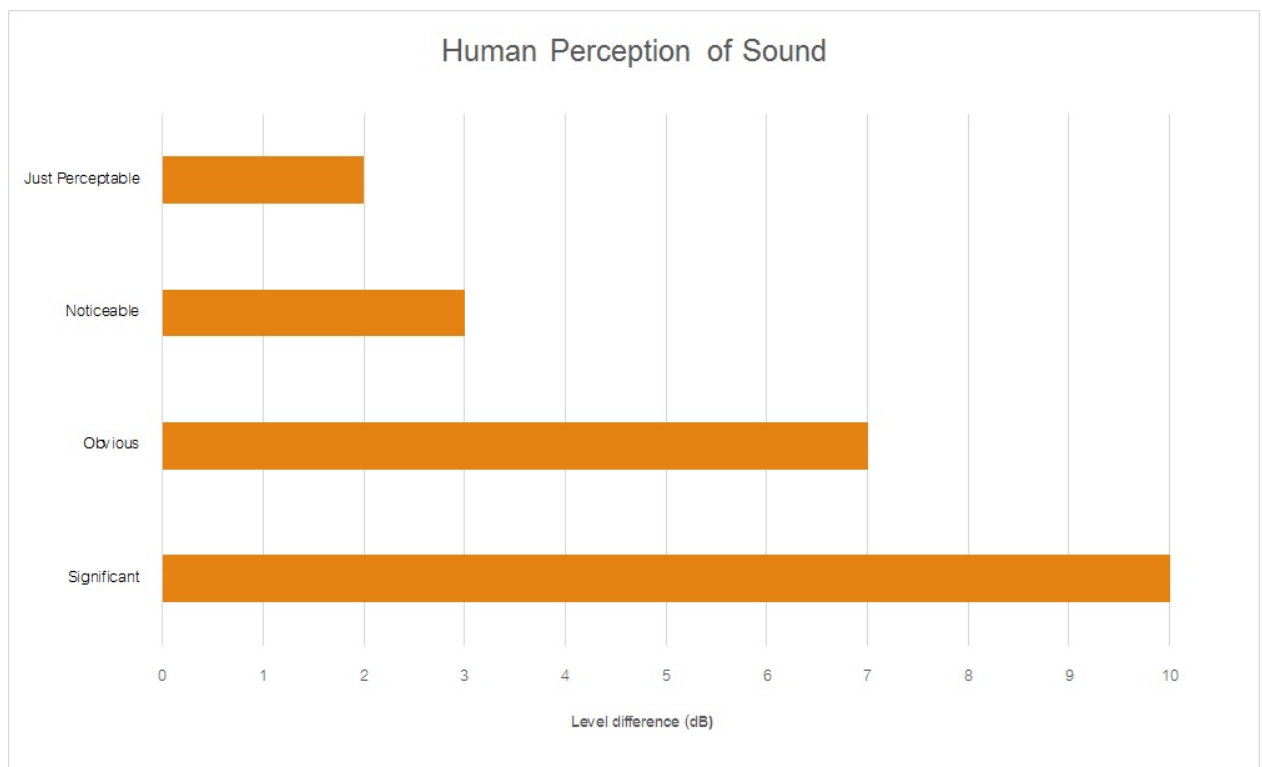
Table A1 provides a number of technical terms have been used in this report.

Table A1 Glossary of Terms	
Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured LA90 statistical noise levels.
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site for a significant period of time (that is, wind occurring more than 30% of the time in any assessment period in any season and/or temperature inversions occurring more than 30% of the nights in winter).
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a source, and is the equivalent continuous sound pressure level over a given period.
LAm _{ax}	The maximum root mean squared (rms) sound pressure level received at the microphone during a measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (LW)	<p>This is a measure of the total power radiated by a source. The sound power of a source is a fundamental location of the source and is independent of the surrounding environment. Or a measure of the energy emitted from a source as sound and is given by :</p> $= 10 \cdot \log_{10} (W/W_0)$ <p>Where : W is the sound power in watts and W₀ is the sound reference power at 10-12 watts.</p>

Table A2 provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA	
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound



Muller Acoustic Consulting Pty Ltd
PO Box 262, Newcastle NSW 2300
ABN: 36 602 225 132
P: +61 2 4920 1833
www.mulleracoustic.com

