# Noise Monitoring Assessment

Teven Quarry, Teven, NSW Quarter 3 Ending September 2020.



# Document Information

**Noise Monitoring Assessment** 

Teven Quarry, Teven, NSW

Quarter 3 Ending September 2020

Prepared for: Holcim (Australia) Pty Ltd

Prepared by: Muller Acoustic Consulting Pty Ltd

PO Box 262, Newcastle NSW 2300

ABN: 36 602 225 132 P: +61 2 4920 1833

www.mulleracoustic.com

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC180611-06RP9	Final	24 September 2020	Nicholas Shipman	N. Shp	Rod Linnett	RULAH

#### DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.



#### CONTENTS

1	11	NTRODUCTION5
2	N	OISE CRITERIA7
3	N	METHODOLOGY9
	3.1	LOCALITY9
	3.2	NOISE MONITORING LOCATIONS9
	3.3	ASSESSMENT METHODOLOGY9
4	R	ESULTS
	4.1	ASSESSMENT RESULTS - LOCATION NM1
	4.2	ASSESSMENT RESULTS - LOCATION NM2
	4.3	ASSESSMENT RESULTS - LOCATION NM3
	4.4	ASSESSMENT RESULTS - LOCATION NM4
	4.5	ASSESSMENT RESULTS - LOCATION NM5
5	D	ISCUSSION
	5.1	DISCUSSION OF RESULTS - LOCATION NM1
	5.2	DISCUSSION OF RESULTS - LOCATION NM2
	5.3	DISCUSSION OF RESULTS - LOCATION NM3
	5.4	DISCUSSION OF RESULTS - LOCATION NM4
	5.5	DISCUSSION OF RESULTS - LOCATION NM5
6	С	ONCLUSION

APPENDIX A - GLOSSARY OF TERMS





Page | 4

# 1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Holcim (Australia) Pty Ltd (Holcim) to complete a Noise Monitoring Assessment (NMA) for the quarterly period ending September 2020 for Teven Quarry (the 'quarry'), Teven, NSW.

The monitoring has been conducted in accordance with the Teven Noise Management Plan (NMP) and in general accordance with relevant conditions outlined in the Development Consent (ref: SSD 6422) at five representative monitoring locations. This assessment has been undertaken during Quarter 3, ending September 2020 and forms part of the noise monitoring program for the quarry.

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA), Environmental Protection Licence (EPL 3293);
- NSW Department of Planning and Environment, Development Consent (SSD 6422), 2015;
- Teven Quarry Noise Management Plan Revision 1, 4 May 2016 (EMM); and
- Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise.

A glossary of terms, definitions and abbreviations used in this report is provided in Appendix A.





# 2 Noise Criteria

Schedule 3 of the Teven Quarry Development Consent (2015), outlines the applicable noise criteria for residential receivers surrounding the quarry site.

**Table 1** reproduces relevant criteria for each of the receivers as outlined in the quarry's Development Consent.

Table 1 Noise Criteria						
	Quarry Operations					
Location <sup>1</sup>	Period: Day	Period: Evening				
Location	7am – 6pm	6pm – 10pm				
	dB LAeq(15min)	dB LAeq(15min)				
R3, R4, R13, R15, R16, R17, R18, R20	38	35				
All other receivers	37	35				

Note 1: Receiver locations are shown in Figure 1.





#### 3 Methodology

#### 3.1 Locality

The quarry is located in Teven, NSW approximately 7km west of Ballina, NSW. Receivers in the locality surrounding the quarry are primarily rural residential. The surroundings of the quarry are primarily rural. The monitoring locations with respect to the quarry are presented in the locality plan shown in **Figure 1**.

#### 3.2 Noise Monitoring Locations

Five monitoring locations have been selected as part of the NMA in accordance with the NMP. The selected monitoring locations are presented in **Table 2** along with the noise sensitive receivers they represent.

Table 2 Monitoring Loc	Table 2 Monitoring Locations (MGA56 Coordinates)							
Location	Nearest Receiver	Easting, m	Northing, m					
NM1	R7	546737	6809918					
NM2	R3/R4	548892	6810285					
NM3	R2	547781	6808991					
NM4	R10	547576	6810379					
NM5	R14	548100	6810792					


#### 3.3 Assessment Methodology

Attended noise surveys were conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise and the NPI. Measurements were carried out using a Svantek Type 1, 971 noise analyser on Tuesday 8 September 2020 and Wednesday 9 September 2020. Acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA.

As per the Noise Management Plan, two daytime measurements were conducted at each monitoring location. It is noted that the quarry was not operating during the evening period, however two measurements were conducted at each monitoring location as per the requirements of the EPL.

Measurements were of 15 minutes in duration and where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to determine the LAeq(15min) noise contribution for comparison against the relevant criteria. Where the quarry was inaudible, the contribution is estimated to be at least 10dB below the ambient noise level.



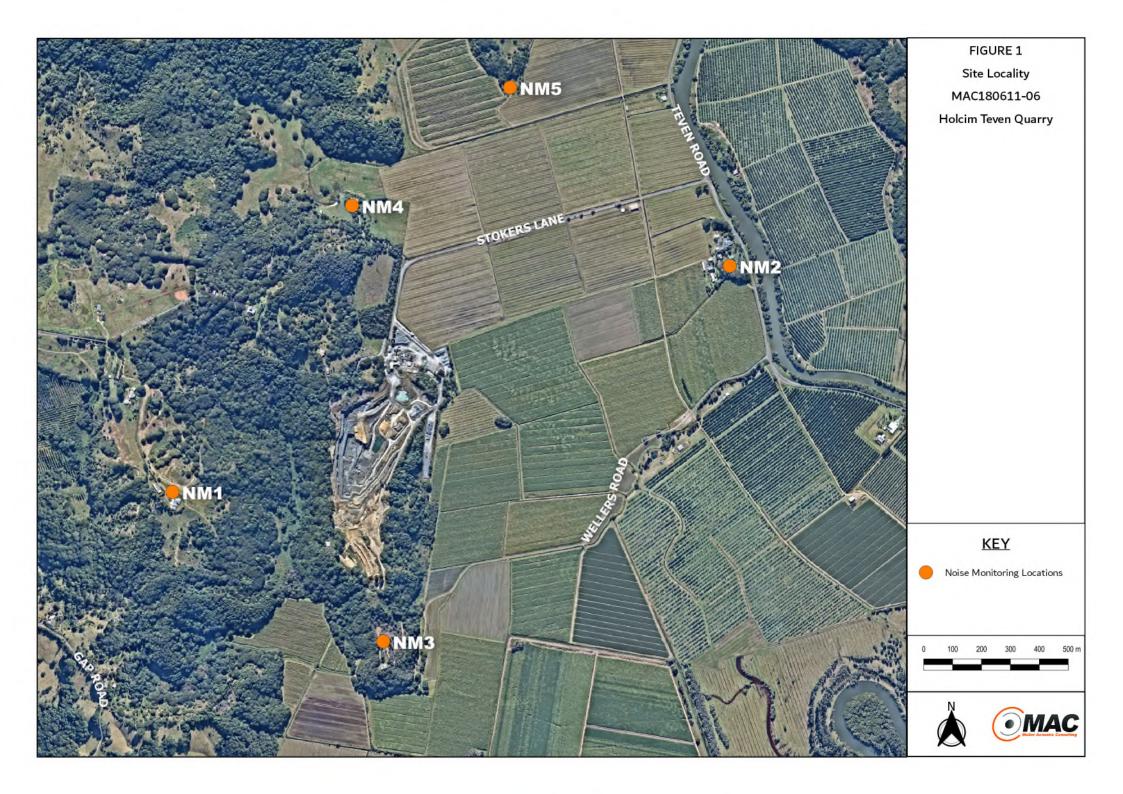

# 4 Results

# 4.1 Assessment Results - Location NM1

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM1 are presented in **Table 3**.

Table 3 Ope	erator-Attend	ed Noise	Survey R	esults – Loc	cation NM1	
Date	Time (hrs)	Descriptor (dBA re 20 μPa)			Meteorology	Description and CDL dDA
Date	Time (fils)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
09/09/2020	07:14 (Day)	67	44	34	WD: S WS: 0.5m/s Rain: Nil	Birds 36-54 Wind 34-37 Traffic 34-67 Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		<35
09/09/2020	07:29 (Day)	70	46	33	WD: S WS: 0.5m/s Rain: Nil	Birds 33-63 Traffic 33-70 Quarry Inaudible
	Teve	<35				
08/09/2020	18:18 (Evening)	48	36	33	WD: S WS: 0.1m/s Rain: Nil	Traffic 36-48 Insects <36 Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational
08/09/2020	18:33 (Evening)	70	43	29	WD: S WS: 0.1m/s Rain: Nil	Insects 28-30 Traffic 28-70 Dogs 28-34 Quarry Inaudible
	Teve	Quarry not operational				

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



# 4.2 Assessment Results - Location NM2

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM2 are presented in **Table 4**.

Table 4 Ope	erator-Attend	ed Noise	Survey R	esults – Lo	cation NM2	
Date	Time (bra)	Descript	or (dBA re	20 μPa)	Matagralagy	Description and CDL dDA
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dBA
					WD: S	Birds 35-56
09/09/2020	07:56	87	65	38	WS: 0.1m/s	Traffic 35-87
09/09/2020	(Day)	01	00	30	Rain: Nil	Dogs 35-44
					Raill. Nii	Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		<35
					WD: S	Birds 38-54
09/09/2020	08:11	85	65	36	WS: 0.1m/s Rain: Nil	Traffic 33-85
09/09/2020	(Day)					Aircraft 36-52
						Quarry Inaudible
	Teve	<35				
			59	34	WD: S	Dogs 41-64
08/09/2020	19:01	83			WS: 0.1m/s	Birds 38-44
00/03/2020	(Evening)		00	04	Rain: Nil	Traffic 37-83
					rain. Wi	Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational
					WD: S	Traffic 34-90
08/09/2020	19:16 (Evening)	90	61	36	WS: 0.1m/s	Dogs 34-46
00/03/2020				30	Rain: Nil	Insects <38
					ixaiii. ixii	Quarry Inaudible
	Teve	Quarry not operational				

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



# 4.3 Assessment Results - Location NM3

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM3 are presented in **Table 5**.

Date	T' // \	Descriptor (dBA re 20 µPa)			Meteorology	D ' ' '   10D    IDA
Date	Time (hrs)	LAmax	LAeq	LA90	Weteorology	Description and SPL, dB
	08:31				WD: S	Birds 38-61
09/09/2020		61	42	29	WS: 0.1m/s	Traffic 29-36
	(Day)				Rain: Nil	Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		<30
		58	40	26	WD: S	Birds 25-58
00/00/0000	08:46 (Day)					Traffic 25-34
09/09/2020					WS: 0.1m/s	Aircraft 29-34
					Rain: Nil	Quarry Inaudible
Teven Quarry LAeq(15min) Contribution						<30
	40.07		36	34	WD: S	Traffic 32-55
08/09/2020	19:37	55			WS: 0.1m/s	Insects 28-34
	(Evening)				Rain: Nil	Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational
	19:52			33	WD: S	Traffic 29-48
08/09/2020		48	37		WS: 0.1m/s	Insects 29-33
	(Evening)				Rain: Nil	Quarry Inaudible
	Quarry not operational					

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



# 4.4 Assessment Results - Location NM4

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM4 are presented in **Table 6**.

D-4-	T' // \	Descriptor (dBA re 20 µPa)			Matagaslagu	Danamintian and CDL alDA
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dB/
						Birds 36-64
	00.00				WD: S	Traffic 34-36
09/09/2020	09:09	64	42	34	WS: 0.1m/s	Aircraft 36-50
	(Day)				Rain: Nil	Insects <32
						Holcim crushing 32-36
	Teve	n Quarry L	Aeq(15min)	Contribution		34
	09:24			MD 0	Birds 36-59	
20/20/2020		50	38	33	WD: S	Traffic <33
09/09/2020	(Day)	59			WS: 0.1m/s	Insects <31
					Rain: Nil	Holcim crushing 31-37
Teven Quarry LAeq(15min) Contribution						34
	00.14				WD: S	Insects 30-54
08/09/2020	20:14	60	56	53	WS: 0.1m/s	Traffic 52-60
	(Evening)				Rain: Nil	Quarry Inaudible
	Teve	n Quarry LA	Aeq(15min)	Contribution		Quarry not operational
	00.00		56		WD: S	Insects 47-52
08/09/2020	20:29 (Evening)	60		54	WS: 0.1m/s	Traffic 47-60
					Rain: Nil	Quarry Inaudible

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.



MAC180611-06RP9

Page | 14

# 4.5 Assessment Results - Location NM5

The monitored noise level contributions and observed meteorological conditions for each day and evening survey period at Location NM5 are presented in **Table 7**.

D-4-	T: (1 )	Descriptor (dBA re 20 µPa)				Description and CDL alDA
Date	Time (hrs)	LAmax	LAeq	LA90	Meteorology	Description and SPL, dB
						Birds 28-49
	00.40				WD: S	Insects <28
09/09/2020	09:49	49	33	29	WS: 0.1m/s	Traffic 28-42
	(Day)				Rain: Nil	Holcim loading 28-30
						Holcim reverse alarms <2
	Teve	n Quarry L	Aeq(15min)	Contribution		<30
			36	29		Birds 34-63
	40.04	63			WD: S	Insects <32
09/09/2020	10:04				WS: 0.5m/s	Traffic 28-34
	(Day)				Rain: Nil	Holcim loading 28-31
						Holcim crushing <30
	Teve	n Quarry L	Aeq(15min)	Contribution		<30
	00.40				WD: S	Traffic 29-84
08/09/2020	20:49	84	56	33	WS: 0.1m/s	Insects 29-31
	(Evening)				Rain: Nil	Quarry Inaudible
	Teve	n Quarry L	Aeq(15min)	Contribution		Quarry not operational
	01.04				WD: S	Traffic 28-83
08/09/2020	21:04 (Evening)	83	55	32	WS: 0.1m/s	Insects 28-30
	(Evening)				Rain: Nil	Quarry Inaudible
	Teve	n Quarry L	4eq(15min)	Contribution		Quarry not operational

Note: Day - the period from 7am to 6pm Monday to Saturday or 8am to 6pm on Sundays and public holidays; Evening - the period from 6pm to 10pm; Night - the remaining periods.





#### 5 Discussion

#### 5.1 Discussion of Results - Location NM1

Quarry noise emissions were inaudible during the daytime measurements conducted on Tuesday 8 September 2020 and Wednesday 9 September 2020. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, wind in trees, traffic, insects, and dogs barking.

#### 5.2 Discussion of Results - Location NM2

Quarry noise emissions were inaudible during the daytime measurements conducted on Tuesday 8 September 2020 and Wednesday 9 September 2020. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, traffic, dogs barking, aircraft, and insects.

#### 5.3 Discussion of Results - Location NM3

Quarry noise emissions were inaudible during the daytime noise measurements conducted on Tuesday 8 September 2020 and Wednesday 9 September 2020. Quarry noise contributions were estimated to satisfy the daytime noise limits. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, traffic, aircraft, and insects.

#### 5.4 Discussion of Results - Location NM4

Quarry noise emissions were audible during the daytime measurements conducted on Tuesday 8 September 2020 and Wednesday 9 September 2020. Front end loader movements, truck loading activities, and processing plant were audible during the two daytime measurements with an estimated



contribution of 34dBA during the measurement period, therefore satisfying the daytime criteria. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non-quarrying sources observed during the measurements included birds, traffic, aircraft, and insects.

# 5.5 Discussion of Results - Location NM5

Quarry noise emissions were audible during the daytime measurements conducted on Tuesday 8 September 2020 and Wednesday 9 September 2020. Front end loader movements, truck loading activities, and processing plant were audible during the two daytime measurements with an estimated contribution of <30dBA during the measurement period, therefore satisfying the daytime criteria. The quarry was not operational during the evening period which satisfied the relevant evening noise limits, however background measurements were completed as per the requirements of the EPL.

Non quarry noise sources observed during the measurements included birds, traffic, and insects.



# 6 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment (NMA) on behalf of Holcim (Australia) Pty Ltd at Teven Quarry, Teven, NSW. The assessment was completed to determine the quarry's compliance with the relevant criteria outlined in their Development Consent for the relevant surrounding residential receivers during Quarter 3, ending September 2020.

Attended noise measurements were undertaken on Tuesday 8 September 2020 and Wednesday 9 September 2020 at representative monitoring locations with quarry noise contributions compared against the relevant criteria. The assessment has identified that noise emissions generated by Teven Quarry generally complied with relevant noise criteria specified in the Development Consent at all assessed residential receivers.





# Appendix A - Glossary of Terms



 Table A1 provides a number of technical terms have been used in this report.


Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice
	the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for
	each assessment period (day, evening and night). It is the tenth percentile of the measured LA90
	statistical noise levels.
Adverse Weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site
	for a significant period of time (that is, wind occurring more than 30% of the time in any
	assessment period in any season and/or temperature inversions occurring more than 30% of the
	nights in winter).
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many
	sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human
	ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the
	most common being the 'A-weighted' scale. This attempts to closely approximate the frequency
	response of the human ear.
dB(Z), dB(L)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second
	equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of
	maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a
	source, and is the equivalent continuous sound pressure level over a given period.
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a
	measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing
	each assessment period over the whole monitoring period. The RBL is used to determine the
	intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (LW)	This is a measure of the total power radiated by a source. The sound power of a source is a
	fundamental location of the source and is independent of the surrounding environment. Or a
	measure of the energy emitted from a source as sound and is given by :
	= 10.log10 (W/Wo)
	Where: W is the sound power in watts and Wo is the sound reference power at 10-12 watts.



**Table A2** provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound P	ressure Levels (SPL), dBA
Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound

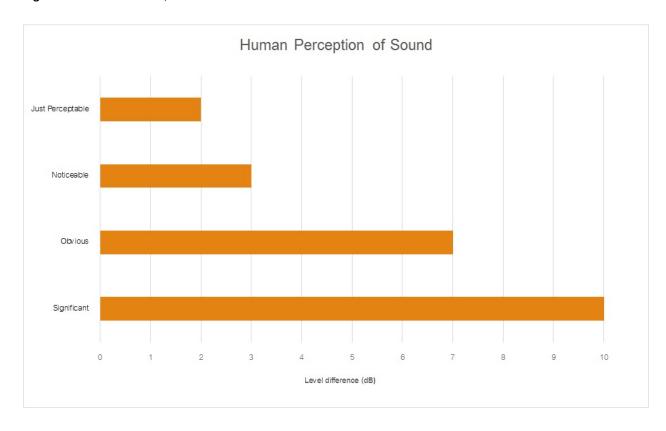





ABN: 36 602 225 132 P: +61 2 4920 1833 www.mulleracoustic.com

