



Bungendore Sand Quarry - Pollution Incident Response Management Plan (PIRMP)

Revision/ Checking History

Revision Number	Date	Checked by	Issued by
1	Nov 2014	Daniel Lidbetter– NSW/ACT Planning & Environment Coordinator	Daniel Lidbetter
		Peter Bujaroski - Quarry Manager	
2	Nov 2015	Daniel Lidbetter – NSW/ACT Planning & Environment Coordinator	Daniel Lidbetter
		Peter Bujaroski - Quarry Manager	
3	Nov 2016	Daniel Lidbetter – NSW/ACT Planning & Environment Coordinator	Daniel Lidbetter
		Robert Hewson – Quarry Manager	
4	Oct 2017	Amy Nelson – NSW/ACT Planning & Environment Coordinator	Amy Nelson
		Robert Hewson – Quarry Manager	
5	Oct 2018	Hema Vignaraja – SHE Reporting Analyst Robert Hewson – Quarry	Hema Vignaraja
		Manager	
6	Sep 2019	Hema Vignaraja – SHE Reporting Analyst	Hema Vignaraja
		Shilpa Shashi - NSW/ACT Planning & Environment Coordinator	
7	Sep 2020	Shilpa Shashi - NSW/ACT Planning & Environment Coordinator	Shilpa Shashi
8	Nov 2021	Shilpa Shashi - NSW/ACT Planning & Environment Coordinator	Shilpa Shashi
		Robert Hewson – Quarry Manager	

Table of Contents

Pollution Incident Response Management plan Bungendore Quarry

Purpose	Ę
Scope	6
Definitions	6
Associated Documentation	7
Responsibilities	7
Record Retention	7
Procedure	8
Environmental Impact and Hazard Register	9
Pollution and safety Equipment information	10
Emergency Response Map	10
Pollution Incident Response Management Plan	28
Communication Stratergy	31
Staff Training	32
Continual Improvement	32

Appendices

- A Emergency Contact Details
- B Pollution Incident Response Test Checklist
- C Community Notification Strategy
- D Maps

Glossary of Acronyms

PIDS- Pollution Information Data Sheet

PPE- Personal Protective Equipment

SDS- Safety Data Sheets

PEOA- Protection of the Environment Operations Act 1997

1. Purpose

The purpose of this document is to detail the pollution incident response management plan for the Bungendore Sand Quarry, to comply with Section 5.7A of the Protection of the Environment Operations (POEO) Act:

Protection of the Environment Operations Act 1997 No 156

Part 5.7A Duty to prepare and implement pollution incident response management plans

153A Duty of licence holder to prepare pollution incident response management plan

The holder of an environment protection licence must prepare a pollution incident response management plan that complies with this Part in relation to the activity to which the licence relates.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.

153B EPA may direct other persons to prepare pollution incident response management plan

- (1) The EPA may, in accordance with the regulations, require the occupier of premises at which industry is carried out to prepare a pollution incident response management plan that complies with this Part in relation to activities at the premises.
- (2) A person must not fail to comply with such a requirement.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.
- (3) The regulations may make provision for or with respect to:
 - (a) the class or classes of premises, or industries carried out at premises, that may be the subject of a requirement to prepare a pollution incident response management plan, and
 - (b) the circumstances in which some or all premises within those classes may be the subject of a requirement to prepare a pollution incident response management plan.

153C Information to be included in plan

A pollution incident response management plan must be in the form required by the regulations and must include the following:

(a) the procedures to be followed by the holder of the relevant environment protection licence, or the occupier of the relevant premises, in notifying a pollution incident to:

- (i) the owners or occupiers of premises in the vicinity of the premises to which the environment protection licence or the direction under section 153B relates, and
- (ii) the local authority for the area in which the premises to which the environment protection licence or the direction under section 153B relates are located and any area affected, or potentially affected, by the pollution, and
- (iii) any persons or authorities required to be notified by Part 5.7,
- (b) a detailed description of the action to be taken, immediately after a pollution incident, by the holder of the relevant environment protection licence, or the occupier of the relevant premises, to reduce or control any pollution
- (c) the procedures to be followed for co-ordinating, with the authorities or persons that have been notified, any action taken in combating the pollution caused by the incident and, in particular, the persons through whom all communications are to be made,
- (d) any other matter required by the regulations.

153D Keeping of plan

A person who is required to prepare a pollution incident response management plan under this Part must ensure that it is kept at the premises to which the relevant environment protection licence relates, or where the relevant activity takes place, and is made available in accordance with the regulations.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.

153E Testing of plan

A person who is required to prepare a pollution incident response management plan under this Part must ensure that it is tested in accordance with the regulations.

Maximum penalty:

- (a) in the case of a corporation—\$2,000,000 and, in the case of a continuing offence, a further penalty of \$240,000 for each day the offence continues, or
- (b) in the case of an individual—\$500,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues.

153F Implementation of plan

If a pollution incident occurs in the course of an activity so that material harm to the environment (within the meaning of section 147) is caused or threatened, the person carrying on the activity must immediately implement any pollution incident response management plan in relation to the activity required by this Part.

Maximum penalty:

- (a) in the case of a corporation—\$2,000,000 and, in the case of a continuing offence, a further penalty of \$240,000 for each day the offence continues, or
- (b) in the case of an individual—\$500,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues.

(c) Scope

The scope of this management plan includes:

Pollution Incident Response Management Plan (PIRMP) for environmental pollution generated at the Teven;

(d) Definitions

Pollution Incident -

An incident or set of circumstances during or as a consequence of which there is or is likely to be a leak, spill or other escape or deposit of a substance, as a result of which pollution has occurred, is occurring or is likely to occur. It includes an incident or set of circumstances in which a substance has been placed or disposed of on premises, but it does not include an incident or set of circumstances involving only the emission of any noise.

Material Harm -

- (i) it involves actual or potential harm to the health or safety of human beings or to ecosystems that is not trivial, or
- (ii) it results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000 (or such other amount as is prescribed by the regulations), It does not matter that harm to the environment is caused only in the premises where the pollution incident occurs, and

Loss -

the reasonable costs and expenses that would be incurred in taking all reasonable and practicable measures to prevent mitigate or make good harm to the environment.

(e) Associated Documentation

Protection of the Environment Operations Act 1997

Protection of the Environment (General) Amendment (Pollution Incident Response Management Plans) Regulation 2012

Appendix A: Emergency Contact Details

Appendix B: Pollution Incident Response Test Checklist

Appendix C: Community Notification Strategy

(f) Responsibility

The following personnel are responsible for the PIRMP;

- Activating the plans and managing the response: Robert Hewson Quarry Manager
- 2) Notifying and coordinating relevant authorities: Robert Croxon Quarry Supervisor

- 3) Implementation and management of this document: Shilpa Shashi- NSW/ACT Planning & Environment Coordinator
- 4) Annual review and test of the PIRMP Robert Hewson Quarry Manager.

(g) Record Retention

A copy of all Quarry pollution incident response records will be retained on site in accordance with SHE guideline 1.4 – Administrative and Legal Requirements. A copy will also be saved electronically on google drive in the 'Site PIRMPs Final' folder and linked with the site's SHE schedule.

Records must be made available to EPA officers and any person responsible for the PIRMP.

(h) Procedure

The following section outlines the management procedures for pollution incident response management. The protocol is split into three sections:

- 1) Key environmental hazards and mitigation measures
- 2) Pollutant and Safety equipment information and management of Pollution Incidents
- 3) Emergency Response Maps

7.1 Environmental Impact and Hazard Register

In order to effectively plan for a potential pollution event, a register of environmental hazards has been created. Each hazard has been assessed in accordance with the Holcim SHE Risk Assessment tool (see Table 1 below).

The hazards have been grouped according to the area of environmental impact. By identifying these hazards ahead of time, mitigation measures can be identified and implemented through site procedures to minimise the risk of a pollution event occurring (Table 2 below).

Table 1: Holcim SHE Risk Score Matrix

Step 1 - Consider the Consequence

What are the consequences of the most reasonable worst case scenario considering a credible failure of existing controls?

Consequence	Disaster	Severe	Serious	Significant	Minor
Environment On Site & Off Site	Major event, unconfined impact, severe permanent damage with low likelihood of recovery.	Significant permanent damage; reversible damage with recovery time of years; high potential for prosecution	Minor permanent damage; temporary damage that is widespread or that has moderate impact	Damage that is near source confined, temporary and minor	No measurable damage to environment
Compliance With Legal and Other Requirements	Blatant or serious breach of legal requirement, leading to operation being suspended or severely reduced. Prosecution expected.	Breach of external requirement (license, legislation, regulation, contract etc.) with high potential for prosecution and/or high impact.	Non-compliance with external requirement with moderate potential for impact.	Repeated non- compliance with internal procedure, non- compliance with external requirement with low potential impact	Minor non-compliance with internal procedures.
Community Perception and Reputation	Significant adverse media attention (state or national level), loss of reputation or work nationally or across product groups.	Prosecution, significant impacts on social license to operate, loss of reputation or ability to secure work across product groups.	Local adverse media attention, loss of reputation or ability to secure work in local area, complaints that result in changes to external requirements.	Multiple community complaints or complaints that require changes to internal operating procedures.	Community complaint resolved with no changes to existing operating procedures.

Issue date: November 2021

Note: Temporary environmental damage has a duration of up to approximately one week to rectify

Step 2 - Consider the Likelihood What is the likelihood that the proposed consequence will occur with a credible failure of existing controls? Likelihood Certain Likely **Possible** Unlikely Rare Event that is Event that may occur only expected to occur Event that is likely to Event that is unlikely to Description in exceptional Event that may occur occur at least once on multiple occur circumstances occasions Event is likely to Event is likely to occur Event is likely to occur Event is likely to occur once Event is likely to occur more than once or twice Frequency occur more than once or twice in a 10 or twice in a 100 year once or twice a year. in a 10 year period period twice a year. year period

	Step 3 - Determine Risk Rating from the Risk Matrix										
Liklihood			Consequences								
Likimood	Disaster	Severe	Serious	Significant	Minor						
Certain	High	High	High	Medium	Medium						
Likely	High	High	Medium	Medium	Low						
Possible	High	Medium	Medium	Low	Low						
Unlikely	Medium	Medium	Low	Low	Low						
Rare	Medium	Low	Low	Low	Low						

Table 2: Holcim Quarry Environmental Impact and Hazard Register

	Key Environmental Hazards L C F						Revised Risk		
Ke			R	Mitigation Measures	L	С	R		
Α	ir Quality								
1	Excessive dust emissions	Possible	Serious	Medium	 Complete monitoring & assess results quarterly Review results & monitoring program quarterly Water carts/spraying Minimise disturbed areas Stop dust generating activities as necessary Progressively rehabilitate disturbed areas Dust minimisation training 	Unlikely	Significant	Low	
2	Health issues off site	Rare	Severe	Low	 As per (1) Complaints hot line Issue monitoring results Communicate construction activities to neighbours plus potential for dust 	Rare	Serious	Low	
3	Equipment exhaust emissions exceed limits	Unlikely	Significan t	Low	 Inspect equipment engine emissions regularly All equipment is serviced and maintained to OEM requirements Excessive equipment emissions to trigger out of service procedures 	Rare	Significan t	Low	

1	Groundwater contamination	Serious	Low		Implement Monitoring and response plan Review monitoring results quarterly & action as necessary Ensure storage, handling and transport of dangerous goods are conducted in accordance with Australian Standards Identify, classify, quantify & appropriately store hazardous waste Develop & implement oil & fuel spillage controls Ensure hazardous waste is minimised Licenced contractors to remove hazardous waste from site Keep records of all hazardous waste movements Develop & implement oil & fuel spillage controls Implement bunding to appropriate areas Ensure adequate spill kits are available on site including adequate training Minimise hazardous waste storage quantities on site	Rare	Serious	Low
2	Lowering of groundwater table	Serious	Low	-	Monitor & report on ground water levels Comply with Water Management Plan water balance	Rare	Significan t	Low
3	Acid-sulphate soils	Serious	Medium	-	Potential Acid sulphate soil (PASS) status is known Implement acid-sulphate soils management plan Regular review of acid-sulphate management plan outcomes	Unlikely	Serious	Low
S	urface Water		Ċ					
1	Discharge of sediment	Serious	Medium		Develop a implement water management rian	Unlikely	Serious	Low

2	Discharge of hazardous materials	Rare	Severe	Low	 As per Surface Water (1) Ensure storage, handling and transport of dangerous goods are conducted in accordance with relevant Australian Standard Review monitoring results quarterly & action as necessary Identify classify, quantify & appropriately store hazardous waste Develop & implement oil & fuel spillage controls Implement bunding to appropriate areas Ensure adequate spill kits are available on site including adequate training for effective use Minimise hazardous waste storage quantities on site Appropriate location of hazardous materials storage areas to prevent off-site discharges 	Rare	Serious	Low
1	Damage to local flora	Possible	Serious	Medium	 Develop & implement Biodiversity Action Plan Put in adequate physical protection measures including signage Monitor & report on site flora health regularly Suitable training re flora protection Removal of stock from sensitive areas Implement bushfire hazard reduction tasks Removal of feral animals from sensitive areas Noxious weed control in sensitive areas 	Unlikely	Significant	Low
2	Damage to site fauna	Unlikely	Serious	Rare	 As per Air Quality (1) Information re local WIRES for distressed or injured fauna 	Rare	Serious	Low
3	Dust pollution onto site sensitive ecological areas	Unlikely	Severe	Medium	 As per (1) Comply with site Management Plans Regular review of riparian areas (as per Management Plans) 	Unlikely	Significan t	Low
1	and Spill of liquid fuel whilst in storage	Possible	Severe	Medium	 Fuels stored according to Holcim's bunding requirements. Measures in place to ensure spills do not leave site boundaries ie diverting flow away from boundaries, stormwater drains. Bunding subject to regular inspection and maintenance 	Significant	Unlikely	Low

2	Spill during delivery of fuel to mobile equipment	Possible	Severe	Medium	 Breakaway couplings installed on mobile fuel delivery vehicles. Drivers stay with vehicle during refuelling Emergency spill kits located on fuel delivery vehicles. Spill response equipment is regularly inspected and maintained Mobile refuelling takes place in the pit Drivers trained in spill response procedures. Refuelling takes place in designated refuelling areas. 	Unlikely	Significant t	Low
3	Spill during delivery of fuel to storage tank	Possible	Severe	Medium	 Supplier's fuel transfer procedure is known Fuel transfer is supervised against suppliers procedure 	Unlikely	Significan t	Low
4	Improper storage and use of PASS remediation materials	Likely	Significant	Medium	 Ensure water leachate is contained on site Quantities held on site are minimised or capped Location of stockpiles close to processing point PASS mitigation materials are managed in accordance with approval conditions Excess materials are disposed of in accordance with legislative requirements 	Unlikely	Significant	Low
5	Land contamination	Likely	Significant	Medium	Holcim land contamination strategy is known and applied	Unlikely	Significant	Low

7.2 Pollutant and Safety Equipment Information

Legislative requirements under the Protection of the Environment Operations (POEO) Act dictate that the site is to provide information for all pollutants that are used and stored on the site. This information is required as it assists personnel responsible for coordinating spill responses to more effectively manage spills.

This information must be presented as a manifest detailing the pollutants stored at the site, the location of these storage areas, and the safety equipment to be made available at these areas. A Pollution Information Data Sheet (PIDS) has been prepared that includes the following information for each pollutant. Refer to table 3 below

The intended use for the pollutant

How the pollutant is stored

SDS information

Safety equipment or other devices that are used to minimise the risks to human health or the environment and to contain or control a pollution incident

PPE needed to safely manage a spill of the pollutant

Procedure for cleaning up a spill of the pollutant.

In order to ensure the currency and reliability of the information in the PIDS, the information should be reviewed and updated on a monthly basis.

Table 3: Pollutant Information Data Sheet and clean-up methods

Pollutant	Storage Location	Current SDS held Yes/No	Emission control equipment (1)	PPE (1)	Spill Clean Up Method (1)
Fuel	Fuel Storage Tank	Yes	Sand, earth, vermiculite	PVS gloves, safety glasses, goggles	Large Spill Assess Quickly assess the spill: Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill? Ensure Personal Safety First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet Secure Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access

Contain Contain the spill quickly by surrounding with the booms which should be firmly secured in place. Find the source of the leak and stop it Emergency stop, cap, plug, move, adjust Move other containers from that area to a bunded area In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment. **Prevent** Prevent spillage to stormwater drains and entry into sewer, water courses, basements or confined areas. <u>Absorb</u> Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation. Recover product from the surface. Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor.

Disposal Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation. Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available. Reporting Incident and Corrective and Preventative action should be captured on the ICare. **Small Spill** Stop leak without risk. Move containers from spill area Absorb with an inert material and place in appropriate waste disposal container. Use spark-proof tools and explosion-proof

					equipment. Dispose of via a licensed waste disposal contractor.
Lubricants	Lubricant Storage Facility	Yes	Sand, earth, vermiculite, barrier equipment (booms, floats etc.)	PVC Gloves, safety glasses, goggles	Large Spill Assess Quickly assess the spill: Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill? Ensure Personal Safety First priority is to ensure safety of yourself and others in the are Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet Secure Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access

Contain Contain the spill quickly by surrounding with the booms which should be firmly secured in place. Find the source of the leak and stop it Emergency stop, cap, plug, move, adjust Move other containers from that area to a bunded area In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment. **Prevent** Prevent spillage to stormwater drains and entry into sewer, water courses, basements or confined areas. <u>Absorb</u> Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation. Recover product from the surface. Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor

Disposal Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation. Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available. Reporting Incident and Corrective and Preventative action should be captured on the ICare **Small Spill** Stop leak without risk. Move containers from spill area Absorb with an inert material and place in appropriate waste disposal container. Use spark-proof tools and explosion-proof

					equipment. Dispose of via a licensed waste disposal contractor.
Vehicle fluids	Oil Storage Facility	Yes	Sand, earth, vermiculite	PVC Gloves, safety glasses	 Large Spill In the case of large spills contact relevant personnel Stop leak without risk. Move containers from spill area. Approach the release from upwind Prevent entry into sewer, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation. Contaminated absorbent material may pose the same hazard as the spilt product Small Spill Stop leak without risk. Move containers from spill area Dilute with water and mop up, or absorb with an inert dry material and place in appropriate waste disposal container Dispose of via a licensed waste disposal contractor.

Vehicle Wash & Degreaser	Shipping storage container	Yes	Sand, earth, vermiculite	PVC Gloves, safety glasses	Large Spill Assess
					Quickly assess the spill:
					Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill?
					Ensure Personal Safety
					First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet
					Secure
					Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access
					<u>Contain</u>
					Contain the spill quickly by surrounding with the booms which should be firmly secured in place. Find the source of the leak and stop it
					Emergency stop, cap, plug, move, adjust

iviove other containers from that area to a
bunded area

In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment.

Prevent

Prevent spillage to stormwater drains and entry into sewer, water courses, basements or confined areas.

Absorb

Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation.

Recover product from the surface.

Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor

Disposal

Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation.

	Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available.
	Reporting
	Incident and Corrective and Preventative action should be captured on the ICare
	Small Spill
	Stop leak without risk.
	Move containers from spill area
	Dilute with water and mop up, or absorb with an inert dry material and place in appropriate waste disposal container
	Dispose of via a licensed waste disposal contractor.

Hardeners and Resins	Fixed Plant Workshop	No	Sand, earth, vermiculite	Safety glasses, PVC gloves, Respirator	Major Spills Large Spill
					Assess Quickly assess the spill: Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill? Ensure Personal Safety First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet Secure Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access Contain Contain the spill quickly by surrounding with the booms which should be firmly secured in place.

Find the source of the leak and stop it Emergency stop, cap, plug, move, adjust Move other containers from that area to a bunded area

In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment.

Prevent

Prevent spillage to stormwater drains and entry into sewer, water courses, basements or confined areas.

Absorb

Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation.

Recover product from the surface.

Use spark-proof tools and explosive proof

equipment. Dispose of via a licensed waste disposal contractor

Disposal

Issue date: November 2021

Contain and collect spillage with noncombustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local

legislation.
Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor.
Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available.
Reporting
Incident and Corrective and Preventative action should be captured on the ICare
Minor Spills
Contain spillage
Avoid breathing vapours and contact with skin and eyes
Control contact using PPE
Contain and absorb with sand, earth, inert material, vermiculite etc.
Small spills should be covered with inorganic absorbents and disposed of properly. Organic absorbents (ie. sawdust) may ignite when contaminated with amines in closed containers

Oils	Oil Storage Facility	Yes	Sand, earth, vermiculite	Safety glasses, PVC gloves	Protective Measures Eliminate all sources of ignition in vicinity of spilled material.
					Spill Management
					 Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable
Dry Powders	Fixed Plant Workshop	No	Access to council sweeper, soil, sand, vermiculite	Safety glasses, PVC Gloves,	regulations. Accidental Release Measures Emergency procedures: Prevent entry to area by unprotected personnel. Methods and material for containments and clean up 1) Vacuum or wet sweep material avoiding generation of dusts.

					 A fine water spray should be used to suppress dust when sweeping. Product dampened with water may be collected with a clean shovel. Seal all spilled product and wastes in vapour tight labelled plastic containers for reuse/recycle where possible or eventual disposal.
Welding gas	Fixed Plant Workshop – External welding gas storage cages	Yes	Ventilation	Respirator	 Occupational Release: Avoid heat, flames, sparks and other sources of ignition. Stop leak if possible without personal risk. Reduce vapours with water spray Keep unnecessary people away, isolate hazard area and deny entry. Remove sources of ignition. Ventilate closed spaces before entering.
Effluent	Septic tank treatment adjacent to amenities building	No	Access to council commercial vacuum/ pump truck,, soil, sand, bleach, hydrated lime	PVC Gloves, goggles, overalls	 Accidental Release Measures Contaminated area must be clearly marked or cordoned off to restrict access. Protective clothing should be worn when cleaning up a sewage spill. If the spilled material can't be recovered using hand tools, a commercial vacuum / pump truck should be called to remove all visible liquid and solid material. When the area is visibly clean, either a chlorine / water solution or hydrated lime should be applied to the spill area to

		disinfect. 5) If a major spill has occurred hydrated lime should be applied to the area in place of chlorine bleach 6) Enough hydrated lime should be applied to raise the pH to at least 12. By raising
		to raise the pH to at least 12. By raising the pH to 12 for at least 1 hour, the area will be disinfected.

 $_{(1)}$ This information is drawn from a review of the SDS or manufacturer / supplier technical information

7.3 Emergency Response Map

In addition to the PIDS the site needs to prepare an emergency response map that provides the following information;

address of site

location of pollutant storage

location of safety equipment

emergency evacuation / muster points

stormwater drains / flow paths

sensitive receivers

sediment dam overflow locations


location of SDS

surrounding area that is likely to be affected by a pollution incident

discharge location of stormwater drains to nearest water coarse or water body

Existing site maps that have been developed to comply with Holcim SHE system requirement 1.84 may be used if all the required items have been included. If an existing map is not available it should be created.

It is important to clearly identify these items so as to be able to respond in an emergency situation.

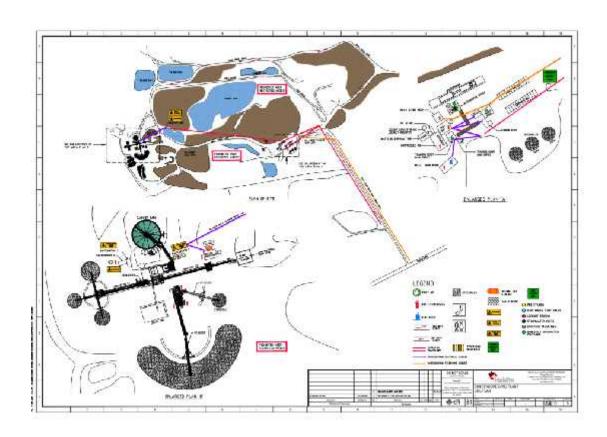

PIRMP Review

Review of PIRMP will be undertaken to check that the information is accurate and current and that the plan is capable of being implemented in a workable and effective manner. Reviewing shall be undertaken in the following ways:

The PIRMP will be tested annually and any identified updates or changes will be made. The PIRMP will be tested and reviewed within one month from the date of any pollution event that triggers this PIRMP. The review will also consist of assessment of any additional hazards and control measures.


In addition to site evacuation drills, a mock environmental incident will be done once a year to ensure all site personnel are following training and correct procedures. The mock scenario will be set and all the actions will be captured on the check sheet. Based on these mock incidents, the Site manager and the Planning and Environmental Coordinator will review the site personnel preparedness and site procedures to identify gaps or areas for improvement. Records of the drill will be maintained, including follow up of opportunities for improvement identified during emergency drills.

7.5 Typical Holcim Response process

If it is suspected that an incident may cause material environmental harm the Pollution Incident Management Response Plan will be executed. This plan is based on seven phases:

- 1. Assess
- 2. Stop
- 3. Notify
- 4. Contain
- 5. Mitigate
- 6. Clean up
- 7. Review

Details of the requirements and responsibilities for each phase are explained below.

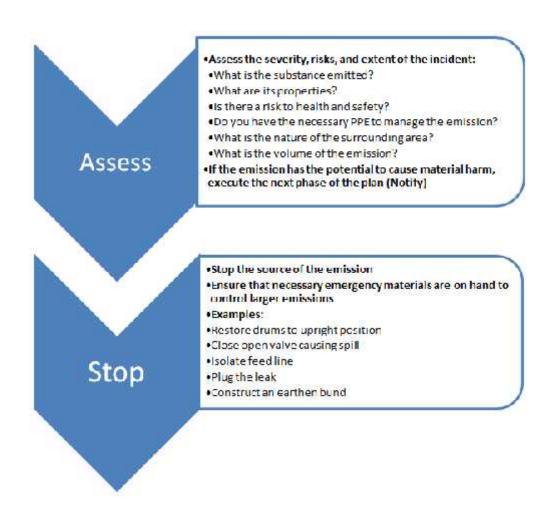

Contact key individuals

- Individuals responsible for activating and managing plans (nominated site representatives)
- •Individuals authorised to notify and coordinate relevant authorities (nominated site representatives)

•Contact Relevant Authorities

- •Lirstly, call DOL if the incident presents an immediate threat to human health or property.
- •If the incident does not require an initial combat agency, or once the ICII call has been made, notify the relevant authorities in the following order. The 24-hour bottime for each authority is given. when available:
- •the Appropriate Regulatory Authority
- •EPA
- Ministry of Health via the local Public Health Unit.
- WorkCover Authority
- •the local authority if this is not the ARA
- •Lire and Rescue NSW
- Specific contact details are provided in appendix A

Contain

Notify

- Utilise barriers (absorbent booms, banks of soil or any other safe objects) or spill absorbent to prevent the emission from spreading.
- When an emission is on a hard surface use appropriate absorbent materials ie absorbent granules or sand
- The main priority is to prevent the emitted material from discharging off site

Mitigate

- Implement environmental controls downstream of pollution source to prevent/minimise further impact to receiving environment
- A Fuel spill discharged into quarry dam. Mitigation controls to ensure this spill is not spread may include closing of weirs, or outlets, ensuring water cart does not fill from affected dam etc.

Clean -up

- Clean up and remedial actions to restore the environment
- Disposal of pollutants in accordance with regulations
- Refer to the Pollution Information Data Sheets (PIDS) for information on handling pollutants and the clean-up process.

Review

- Conduct an investigation into the event and assist the EPA and investigators with external enquiries
- Complete internal reporting;
- As per Holcim SHE requirement 5.1
- •Test the effectiveness of Pollution Incident Response Management Plan annually and one month after the incident to ensure controls are replenished.
- Testing protocol is provided in appendix B

7.5 Communication Strategy

It is a legal requirement of the Protection of the Environment Operations (POEO) Act, to notify key stakeholders in neighbouring properties that may been affected by an incident.

Communicating with neighbours and the community in the event of an environmental incident is vital as they have a right to know about any spill that can potentially lead to material harm to their properties or themselves. The communication strategy in the PIRMP provides sites with a method of communicating with key stakeholders.

Key stakeholders include neighbouring residential and/or commercial properties, sensitive receivers ie farms, hospitals schools within the area of impact. Consideration must be given to sensitive receivers that may be affected if the emission reaches a water body. For example a farmer that is cultivating crops down river from your site will need to be informed of a spill to prevent him spraying his crops with polluted irrigation water.

The PIRMP must include details of the mechanisms that will be used for providing early warnings and regular updates to the owners and occupiers of premises who may be affected by an incident occurring at the premises.

The communication strategy should also make reference to any actions or arrangements that will be in place to minimise the risk of harm to any persons who will be on the premises or who are likely to be on the premises at the time of an incident. This is a legislative requirement that needs to be included in the PIRMP.

For a table detailing the communication strategy for this site:

Refer to Appendix C – Community Notification Strategy

7.6 Staff Training

Sites need to develop a toolbox talk based on the PIRMP. This training should be delivered to all appropriate personnel on site and be conducted to include potential scenarios that may require implementation of the plan.

Frequency of training

Training for site staff should be repeated annually, and after each update to the plan. In the event of an incident requiring the PIRMP to be activated a training drill should be carried within one month of the incident occurring.

How Records of training are kept

Training records should be stored on site and in the Chris 21 data base. This data base is the primary online tool for tracking individual staff training records and frequency for training and refresh courses. These records are to be made available to relevant authorities on request.

7.7 Continual Improvement

It is a legislative requirement for this plan to be tested and updated on an annual basis and within one month of an incident.

To complete this requirement a Pollution Incident Response Test Checklist has been prepared and provided as Appendix B. The checklist includes the major elements of the plan that require testing:

Contact numbers

Evacuation drills

Desktop assessment

Staff training and awareness

Environmental controls & PPE

Desktop assessments require site personnel, responsible for testing the plan, to select a scenario from the hazard and impact register (table 2) and ensure that all the required controls for the scenario are in place. During the desktop assessment environmental control and PPE equipment supplies should be inspected to ensure that they are functional and that there are enough materials to ensure that emissions relating to the scenario can be controlled effectively and safely.

Appendix A Emergency Contact Details

Contacts	Phone Number
Individuals responsible for activating the plans and managing the response	Quarry Manager Robert Hewson – 0429 791 071
Individuals Authorised to Notify and Coordinate Relevant Authorities	Quarry Manager Robert Hewson – 0429 791 071
Emergency Services	000
EPA	131 555
The Ministry of Health via the local Public Health Unit	Bungendore Medical (02) 6299 6990
WorkCover Authority	(02) 4222 8311
Local Council (If this is not DECCW)	13 10 50
(List of NSW Local Council Phone Numbers www.dlg.nsw.gov.au/dlg/dlghome/dlg_localgovdir ectory.asp)	
Fire and Rescue NSW	Palerang Council (02) 6238 8111
Other Organisations or agencies that need to be advised of the incident	Bungendore Fire Dept (02) 6297 2332

Appendix B - Pollution Incident Response Test Checklist

Date:
Site:
Address:
Pollution Incident Scenario:
Instructions
 Select an Environmental Incident applicable to the site to test in a Pollution Scenario (this may include a major spill, equipment failure or breaches of license consent that may cause impacts onsite and to the surrounding community);
2. Using the scenario conduct a desktop review using the Test Checklist as a prompt to ensure that each component of the PIRMP is up to date;
3. Sign off the checklist, scan and send to the NSW Planning & Environmental Coordinator;
4. Planning & Environmental Coordinator will make amendments to the plans and submit these to the site managers for review and approval;
5. Site Managers to hold a tool box talk with staff on the details of the PIRMP and keep a copy of the PIRMP onsite for future reference.
Are all contact details within the plan current and Phone Numbers

Are all contact details within the plan current and up to date?	Phone Numbers	
	Currency	Updated Number
Individuals responsible for activating the plans and managing the response		
Individuals Authorised to Notify and Coordinate Relevant Authorities		
Emergency Services		

EPA	
The Ministry of Health via the local Public Health Unit	
WorkCover Authority	
Local Council	
Fire and Rescue NSW	
Additional Contacts relevant to the licensee's premises	
Other Organisations or agencies that need to be advised of the incident	

Environmental Hazards and Control Standards	Yes/ No	Actions
Are the descriptions of environmental hazards up to date?		
Are the potential and likelihood of incidents that could occur still correct and relevant to the site operations?		
Are the pre-emptive actions for risk management of the relevant activity correct and relevant to the site?		
Is there an inventory of pollutants (including		

quantities of pollutants onsite)?	
Is the listed safety equipment & PPE correct and up to date?	
Is there a map/s located onsite detailing the following; - The site and the surrounding area likely to be affected in the event of an incident - The Locations of storage/ holding points of pollutants - Stormwater drains and discharge points offsite	
Are the nature and objectives of staff training set out in the plan?	
Are there details of mechanisms for providing early warnings and regular updates to the owners and occupiers?	
Is there a copy of the plan onsite and up to date?	

Has there been an evacuation drill in the last 12 months?	
Date:	
Notes:	

Improvements to the Pollution Incident Response Management Plan:

- •
- •
- _
- _

Comments / Recommendations / Review • • • • • • • •

Appendix C – Community Notification Strategy

If there is an Environmental Incident that has the potential to cause harm to the following stakeholders they will be contacted by TELEPHONE

Stakeholder Component	Name	Contact Information
Adjacent Property	lan Carey	0412 484 614
Elvin group	Chris Rutlidge	02 6241 6461
Adjacent Property	Abbey Morphett	02 6238 1167