

Lynwood Quarry Pollution Incident Response Management Plan (PIRMP)

Revision/ Checking History

Revision Number	Date	Checked by	Issued by
1	23/10/17	Amy Nelson – NSW/ACT Planning & Environment Coordinator Alana White – Snr Environment & Community Liaison	Amy Nelson
2	Oct 2018	Hema Vignaraja – SHE Reporting Analyst Alana White – Snr Environment & Community Liaison	Hema Vignaraja
3	Sept 2019	Hema Vignaraja – SHE Reporting Analyst Shilpa Shashi - NSW/ACT Planning & Environment Coordinator	Hema Vignaraja
4	Sep 2020	Shilpa Shashi - NSW/ACT Planning & Environment Coordinator	Shilpa Shashi
5	Nov 2021	Shilpa Shashi - NSW/ACT Planning & Environment Coordinator Wayne Beattie – Quarry Manager	Shilpa Shashi
6	Nov 2022	Rob Townsend - Acting environment manager-NSW Wayne Beattie – Quarry Manager	Rob Townsend
7	Oct 2023	Dozie Egeonu - Environment Manager NSW & ACT Wayne Beattie – Quarry Manager	Dozie Egeonu
8	Nov 2024	Dozie Egeonu - Environment Manager NSW & ACT Wayne Beattie – Quarry Manager	Dozie Egeonu

Table of Contents

1.	Purpose	5
2.	Scope	7
3.	Definitions	7
4.	Associated Documentation	8
5.	Responsibility	8
6.	Record Retention	8
7.	Procedure	9
7.1 E	Environmental Impact and Hazard Register	10
Table	e 1: Holcim SHE Risk Score Matrix	11
Table	e 2: Holcim Quarry Environmental Impact and Hazard Register	14
7.2	Pollutant and Safety Equipment Information	20
7.3	Emergency Response Map	35
7.4	PIRMP Review	37
7.5	Typical Holcim Response process	38
7.6	Communication Strategy	40
7.6	Staff Training	41
7.7	Continual Improvement	41

Appendices

- A Emergency Contact Details
- B Pollution Incident Response Test Checklist
- C Community Notification Strategy

Glossary of Acronyms

PIDS- Pollution Information Data Sheet

PPE- Personal Protective Equipment

SDS- Safety Data Sheets

PEOA- Protection of the Environment Operations Act 1997

1. Purpose

The purpose of this document is to detail the pollution incident response management plan for the Lynwood Quarry, to comply with Section 5.7A of the Protection of the Environment Operations (POEO) Act:

Protection of the Environment Operations Act 1997 No 156

Part 5.7A Duty to prepare and implement pollution incident response management plans

153A Duty of licence holder to prepare pollution incident response management plan

The holder of an environment protection licence must prepare a pollution incident response management plan that complies with this Part in relation to the activity to which the licence relates.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.

153B EPA may direct other persons to prepare pollution incident response management plan

- (1) The EPA may, in accordance with the regulations, require the occupier of premises at which industry is carried out to prepare a pollution incident response management plan that complies with this Part in relation to activities at the premises.
- (2) A person must not fail to comply with such a requirement.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.
- (3) The regulations may make provision for or with respect to:
- (a) the class or classes of premises, or industries carried out at premises, that may be the subject of a requirement to prepare a pollution incident response management plan, and
- (b) the circumstances in which some or all premises within those classes may be the subject of a requirement to prepare a pollution incident response management plan.

153C Information to be included in plan

A pollution incident response management plan must be in the form required by the regulations and must include the following:

- (a) the procedures to be followed by the holder of the relevant environment protection licence, or the occupier of the relevant premises, in notifying a pollution incident to:
- (i) the owners or occupiers of premises in the vicinity of the premises to which the environment protection licence or the direction under section 153B relates, and
- (ii) the local authority for the area in which the premises to which the environment protection licence or the direction under section 153B relates are located and any area affected, or potentially affected, by the pollution, and
- (iii) any persons or authorities required to be notified by Part 5.7,
- (b) a detailed description of the action to be taken, immediately after a pollution incident, by the holder of the relevant environment protection licence, or the occupier of the relevant premises, to reduce or control any pollution
- (c) the procedures to be followed for co-ordinating, with the authorities or persons that have been notified, any action taken in combating the pollution caused by the incident and, in particular, the persons through whom all communications are to be made,
- (d) any other matter required by the regulations.

153D Keeping of plan

A person who is required to prepare a pollution incident response management plan under this Part must ensure that it is kept at the premises to which the relevant environment protection licence relates, or where the relevant activity takes place, and is made available in accordance with the regulations.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.

153E Testing of plan

A person who is required to prepare a pollution incident response management plan under this Part must ensure that it is tested in accordance with the regulations.

Maximum penalty:

- (a) in the case of a corporation—\$1,000,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues, or
- (b) in the case of an individual—\$250,000 and, in the case of a continuing offence, a further penalty of \$60,000 for each day the offence continues.

153F Implementation of plan

If a pollution incident occurs in the course of an activity so that material harm to the environment (within the meaning of section 147) is caused or threatened, the person

carrying on the activity must immediately implement any pollution incident response management plan in relation to the activity required by this Part.

Maximum penalty:

- (a) in the case of a corporation—\$2,000,000 and, in the case of a continuing offence, a further penalty of \$240,000 for each day the offence continues, or
- (b) in the case of an individual—\$500,000 and, in the case of a continuing offence, a further penalty of \$120,000 for each day the offence continues.

2. Scope

The scope of this management plan includes:

Pollution Incident Response Management Plan (PIRMP) for environmental pollution generated at the Lynwood Quarry;

3. Definitions

Pollution Incident - An incident or set of circumstances during or as a consequence of which there is or is likely to be a leak, spill or other escape or deposit of a substance, as a result of which pollution has occurred, is occurring or is likely to occur. It includes an incident or set of circumstances in which a substance has been placed or disposed of on premises, but it does not include an incident or set of circumstances involving only the emission of any noise.

Material Harm -(i) it involves actual or potential harm to the health or safety of human beings or to ecosystems that is not trivial, or

(ii) it results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000 (or such other amount as is prescribed by the regulations), It does not matter that harm to the environment is caused only in the premises where the pollution incident occurs, and

Loss - the reasonable costs and expenses that would be incurred in taking all reasonable and practicable measures to prevent mitigate or make good harm to the environment.

4. Associated Documentation

- Protection of the Environment Operations Act 1997
- Protection of the Environment (General) Amendment (Pollution Incident Response Management Plans) Regulation 2012
- Appendix A: Emergency Contact Details
- Appendix B: Pollution Incident Response Test Checklist

Appendix C: Community Notification Strategy

5. Responsibility

The following personnel are responsible for the PIRMP;

- 1) Activating the plans and managing the response: **Wayne Beattie** Quarry Manager and Mohsen VAFAEI FARD Support Services Supervisor
- 2) Notifying and coordinating relevant authorities: Wayne Beattie- Quarry Manager
- 3) Implementation and management of this document: **Dozie Egeonu-** Environment Manager NSW & ACT
- 4) Annual review and testing of PIRMP Wayne Beattie Quarry Manager

6. Record Retention

A copy of all Quarry pollution incident response records will be retained on site in accordance with SHE guideline 1.4 – Administrative and Legal Requirements. A copy will also be saved electronically on google drive in the 'Site PIRMPs Final' folder and linked with the site's SHE schedule.

Records must be made available to EPA officers and any person responsible for the PIRMP.

7. Procedure

The following section outlines the management procedures for pollution incident response management. The protocol is split into three sections:

- 1) Key environmental hazards and mitigation measures
- 2) Pollutant and Safety equipment information and management of Pollution Incidents
- 3) Emergency Response Maps

7.1 Environmental Impact and Hazard Register

In order to effectively plan for a potential pollution event, a register of environmental hazards has been created. Each hazard has been assessed in accordance with the Holcim SHE Risk Assessment tool (see Table 1 below).

The hazards have been grouped according to the area of environmental impact. By identifying these hazards ahead of time, mitigation measures can be identified and implemented through site procedures to minimise the risk of a pollution event occurring (table 2 below).

Table 1: Holcim SHE Risk Score Matrix

Step 1 - Consider the Consequence

What are the consequences of the most reasonable worst case scenario considering a credible failure of existing controls?

Consequence	Disaster	Severe	Serious	Significant	Minor
Environment On Site & Off Site	Major event, unconfined impact, severe permanent damage with low likelihood of recovery.	Significant permanent damage; reversible damage with recovery time of years; high potential for prosecution	Minor permanent damage; temporary damage that is widespread or that has moderate impact	Damage that is near source confined, temporary and minor	No measurable damage to environment
Compliance With Legal and Other Requirements	Blatant or serious breach of legal requirement, leading to operation being suspended or severely reduced. Prosecution expected.	Breach of external requirement (license, legislation, regulation, contract etc.) with high potential for prosecution and/or high impact.	Non-compliance with external requirement with moderate potential for impact.	Repeated non-compliance with internal procedure, non-compliance with external requirement with low potential impact	Minor non-compliance with internal procedures.

Community Perception and Reputation product gro	impacts on social license to operate, loss of reputation or ability to secure work across product groups.	Local adverse media attention, loss of reputation or ability to secure work in local area, complaints that result in changes to external requirements.	Multiple community complaints or complaints that require changes to internal operating procedures.	Community complaint resolved with no changes to existing operating procedures.
---	---	--	--	--

Note: Temporary environmental damage has a duration of up to approximately one week to rectify

	What is the likelihood that the proposed consequence will occur with a credible failure of existing controls?													
Likelihood	Certain	Likely	Possible	Unlikely	Rare									
Description	Event that is expected to occur on multiple occasions	Event that is likely to occur at least once	Event that may occur	Event that is unlikely to occur	Event that may occur only in exceptional circumstances									
Frequency	Event is likely to occur more than twice a year.	Event is likely to occur once or twice a year.	Event is likely to occur more than once or twice in a 10 year period	Event is likely to occur once or twice in a 10 year period	Event is likely to occur once or twice in a 100 year period									

Step 3 - Determine Risk Rating from the Risk Matrix														
Likelihood	Consequence													
Likelinood	Disaster	Severe	Serious	Significant	Minor									
Certain	High	High	High	Medium	Medium									
Likely	High	High	Medium	Medium	Low									
Possible	High	Medium	Medium Low		Low									
Unlikely	Medium	Medium	Low	Low	Low									
Rare	Medium	Low	Low	Low	Low									

Table 2: Holcim Quarry Environmental Impact and Hazard Register

		Risk				Revised Risk			
Ke	y Environmental Hazards	L	С	R	Mitigation Measures		С	R	
Aiı	· Quality								
1	Excessive dust emissions				 Complete monitoring & assess results monthly 				
	P				 Review results & monitoring program quarterly 				
					 Water carts/spraying 				
					 Apply crusting agents to surface of stockpiles of fine materials 				
		P		M e	 Minimise disturbed areas 	U	Si		
		os	S er		 Stop dust generating activities as necessary 	nl	g ni	Lo	
		si bl	io	di u	 Progressively rehabilitate disturbed areas 	ik el	fi	w	
		e	us	m	 Modify works during periods of high wind 	у	ca nt		
					 Dust minimisation training 		""		
					Maintenance of dust control equipment				
					 Engineering controls for discharge of fine materials to stockpiles 				
					 Engineering controls for dust emissions from the material processing 				
					plant				

2	Health issues off site				•	As per (1)			
					•	Complaints hot line			
					-	Assess monitoring results			
		R ar e	S ev er e	Lo w			R ar e	S er io us	Lo w
G	roundwater								

1	Groundwater contamination				■ Implement Monitoring and response plan					
					 Review monitoring results annually & action as necessary 					
		U nl ik el y	S er io us	Lo w	 Ensure storage, handling and transport of dangerous goods are conducted in accordance with Australian Standards Identify, classify, quantify & appropriately store hazardous waste Develop & implement oil & fuel spillage controls Ensure hazardous waste is minimised Licenced contractors to remove hazardous waste from site Keep records of all hazardous waste movements 	R ar e	S er io us	Lo w		
							 Implement bunding to appropriate areas Ensure adequate spill kits are available on site including adequate training Minimise hazardous waste storage quantities on site 			
2	Lowering of groundwater table	R ar e	S er io us	Lo w	 Monitor & report on ground water levels Comply with Water Management Plan water balance 	R ar e	Si g ni fi ca nt	Lo w		

1 Discharge of sedim	nent			Develop & implement Water Management Plan			
	P os si bl e	S er io us	M e di u m	 Implement Monitoring Program Review monitoring results quarterly & action as necessary Develop & implement Surface & Groundwater Response Plan Develop & implement Erosion & Sediment Control Plan 	U nl ik el y	S er io us	Lo w
2 Discharge of hazar	R ar e	S ev er e	Lo w	 Ensure storage, handling and transport of dangerous goods are conducted in accordance with relevant Australian Standard Review monitoring results quarterly & action as necessary Identify classify, quantify & appropriately store hazardous waste Develop & implement oil & fuel spillage controls Implement bunding to appropriate areas Ensure adequate spill kits are available on site including adequate training for effective use Minimise hazardous waste storage quantities on site Appropriate location of hazardous materials storage areas to prevent off-site discharges 	R ar e	S er io us	Lo w

1	Blasting impacts				•	Develop & implement Blast Monitoring Program						
					•	Develop & implement Blast Management Plan						
					•	Detailed design for each blast						
		U	S			Monitoring of each blast	U	S				
		nl ik	er	Lo	•	Notify sensitive receivers in accordance with site blasting plans	nl ik	er	Lo			
		el	io	w	•	Establish & advertise blasting hotline	el	io	w			
		у	us						Drill accuracy is monitored via bore tracking procedures	у	us	
									Establish site blasting procedures & train personnel including sirens etc			
						Clear site to safe areas prior to blasts						
2	Vibration / airblast damage to	R	S		•	As per 1	R	S				
	off-site structures	ar	ev er	Lo w		Monitor sensitive areas & review blast design as necessary	ar	er io	Lo w			
		е	e				е	us				
3	Cartridges – Mix of gun powder and ammonia nitrate		S		•	Appropriate storage		S				
	and annitonia muate	R	ev	Lo	•	Security	R	ev	Lo			
		ar er w Ventilation		ar e	er	w						
			е			Temperature control		e				

4	Ammonia nitrate, diesel and gassing agent	R ar e	S ev er e	Lo w		Aluminium storage containers Spill response notices Spill response equipment on vehicle Separate storage containers	R ar e	S ev er e	Lo w
Fo	ology				•	Mix only on site			
1	Damage to local flora	P os si bl e	S er io us	M e di u m		Develop & implement Rehabilitation and Landscape Management Plan Monitor & report on site flora health as per consent requirements Suitable training re flora protection Removal of stock from sensitive areas Implement bushfire hazard reduction tasks Removal of feral animals from sensitive areas Noxious weed control in sensitive areas	U nl ik el y	Si g ni fi ca nt	Lo w
2	Damage to site fauna	U nl ik el y	S er io us	R ar e		As per 1 Information re local WIRES for distressed or injured fauna Reporting on fauna deaths Three yearly monitoring	R ar e	S er io us	Lo w

1	Spill of liquid fuel, oils, chemicals etc whilst in storage	P os si bl e	S ev er e	M e di u m	 Fuels, oils, chemicals etc stored according to Holcim's bunding requirements. Measures in place to ensure spills do not leave site boundaries ie diverting flow away from boundaries, stormwater drains. Bunding subject to regular inspection and maintenance 	Si g ni fi ca nt	U nl ik el y	Lo w
2	Spill during delivery of fuel to mobile equipment	P os si bl e	S ev er e	M e di u m	 Breakaway couplings installed on mobile fuel delivery vehicles. Drivers stay with vehicle during refuelling Emergency spill kits located on fuel delivery vehicles. Spill response equipment is regularly inspected and maintained Mobile refuelling takes place in the pit or in designated areas Drivers trained in spill response procedures. 	U nl ik el y	Si g ni fi ca nt t	Lo w
3	Spill during delivery of fuel to storage tank	P os si bl e	S ev er e	M e di u m	 Supplier's fuel transfer procedure is known Fuel transfer is supervised against suppliers procedure 	U nl ik el y	Si g ni fi ca nt	Lo w

4	Land contamination	Li ke ly	Si g ni fi ca nt	M e di u m	•	Holcim land contamination strategy is known and applied	U nl ik el y	Si g ni fi ca nt	Lo w
5	Spill from train locomotive fuelling and operations	P os si bl e	S ev er e	M e di u m		Breakaway couplings installed on fuel delivery devices. Drivers stay with locomotive during refuelling Emergency spill kits located at fuel delivery locations. Spill response equipment is regularly inspected and maintained Refuelling takes place over bunded area only Drivers trained in spill response procedures.	U nl ik el y	Si g ni fi ca nt t	Lo w

7.2 Pollutant and Safety Equipment Information

Legislative requirements under the Protection of the Environment Operations (POEO) Act dictate that the site is to provide information for all pollutants that are used and stored on the site. This information is required as it assists personnel responsible for coordinating spill responses to more effectively manage spills.

This information must be presented as a manifest detailing the pollutants stored at the site, the location of these storage areas, and the safety equipment to be made available at these areas. A Pollution Information Data Sheet (PIDS) has been prepared that includes the following information for each pollutant. Refer to table 3 below

- The intended use for the pollutant
- How the pollutant is stored
- SDS information
- Safety equipment or other devices that are used to minimise the risks to human health or the environment and to contain or control a pollution incident
- PPE needed to safely manage a spill of the pollutant
- Procedure for cleaning up a spill of the pollutant.

In order to ensure the currency and reliability of the information in the PIDS, the information should be reviewed and updated on a monthly basis.

Table 3: Pollutant Information Data Sheet and clean-up methods

Pollutant	Storage Location	Current SDS held Yes/No	Emission control equipment (1)	PPE (1)	Spill Clean Up Method (1)
Fuel	Weighbridge, train load out, washdown bay, workshop	Yes	Sand, earth,	PVS gloves, safety glasses, goggles	Large Spill Assess Quickly assess the spill:
					Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill?
					Ensure Personal Safety First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet

			<u>Secure</u>
			Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access
			<u>Contain</u>
			Contain the spill quickly by surrounding with the booms which should be firmly secured in place. Find the source of the leak and stop it
			Emergency stop, cap, plug, move, adjust Move other containers from that area to a bunded area In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment.
	-		<u>Prevent</u>

		Prevent spillage to stormwater drains and
		entry into sewer, water courses, basements
		or confined areas.
		<u>Absorb</u>
		Contain and collect spillage with
		non-combustible, absorbent material e.g.
		sand, earth, vermiculite or diatomaceous
		earth and place into a container according
		to local legislation.
		Recover product from the surface.
		Use spark-proof tools and explosive proof
		equipment. Dispose of via a licensed waste
		disposal contractor.
		<u>Disposal</u>
		Contain and collect spillage with
		non-combustible, absorbent material e.g.
		sand, earth, vermiculite or diatomaceous
		earth and place into a container according
		to local legislation.

			Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor.
			Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available.
			Reporting
			Incident and Corrective and Preventative action should be captured on the ICare
			Small Spill
			Stop leak without risk.
			Move containers from spill area
			Absorb with an inert material and place in appropriate waste disposal container.
	-		Use spark-proof tools and explosion-proof equipment.

					Dispose of via a licensed waste disposal contractor.
Lubricants	Washdown bay, workshop, Fullbore containers	Yes	Sand, earth, vermiculite, barrier equipment (booms, floats etc.)	PVC Gloves, safety glasses, goggles	Large Spill Assess Quickly assess the spill: Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill? Ensure Personal Safety First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation. Do you or others require PPE Check Safety Data Sheet

	1	
		Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access
		<u>Contain</u>
		Contain the spill quickly by surrounding with the booms which should be firmly secured in place. Find the source of the leak and stop it Emergency stop, cap, plug, move, adjust Move other containers from that area to a bunded area In the case of spillage on water, prevent the spread of product by the use of suitable barrier equipment.
		Prevent

		Prevent spillage to stormwater drains and entry into sewer, water courses, basements or confined areas.
		<u>Absorb</u>
		Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation.
		Recover product from the surface.
		Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor
		<u>Disposal</u>
		Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous

		earth and place into a container according
		to local legislation.
		Use spark-proof tools and explosive proof
		equipment. Dispose of via a licensed waste
		disposal contractor.
		Contaminated absorbent material may pose
		the same hazard as the spilt product.
		Monitor its disposal. The spill soiled bags
		need to be labelled and ear marked and
		placed in a leak proof container which is
		locked. SDS should be made available.
		Reporting
		
		Incident and Corrective and Preventative
		action should be captured on the ICare.
		Small Snill
		Small Spill
		Stop leak without risk.

					Move containers from spill area Absorb with an inert material and place in appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
Vehicle fluids	Workshop, washdown bay, Fullbore storage area	Yes	Sand, earth, vermiculite	PVC Gloves, safety glasses	Large Spill Assess Quickly assess the spill: Decide whether to handle the situation by yourself or if you require help. Advise your team of the hazard Post a guard or barricade Can you stop the source of the spill? Ensure Personal Safety First priority is to ensure safety of yourself and others in the area Consider evacuation and isolation.

		Do you or others require PPE Check Safety Data Sheet
		<u>Secure</u>
		Secure the spill If hazardous to public or other staff exists Post a guard immediately Enter barricades to prevent unintended access
		Contain Contain the spill quickly by surrounding with
		the booms which should be firmly secured in place. Find the source of the leak and stop it Emergency stop, cap, plug, move, adjust Move other containers from that area to a
		bunded area

		In the case of spillage on water, prevent the
		spread of product by the use of suitable
		barrier equipment.
		Prevent
		Prevent spillage to stormwater drains and
		entry into sewer, water courses, basements
		or confined areas.
		<u>Absorb</u>
		Contain and collect spillage with
		non-combustible, absorbent material e.g.
		sand, earth, vermiculite or diatomaceous
		earth and place into a container according to local legislation.
		to local legislation.
		Recover product from the surface.
		·
		Use spark-proof tools and explosive proof
		equipment. Dispose of via a licensed waste
		disposal contractor
		alsposal contractor

	<u>Disposal</u>
	Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place into a container according to local legislation.
	Use spark-proof tools and explosive proof equipment. Dispose of via a licensed waste disposal contractor.
	Contaminated absorbent material may pose the same hazard as the spilt product. Monitor its disposal. The spill soiled bags need to be labelled and ear marked and placed in a leak proof container which is locked. SDS should be made available.
	Reporting Incident and Corrective and Preventative
	action should be captured on the ICare. Small Spill Stop leak without risk.

					Move containers from spill area Dilute with water and mop up, or absorb with an inert dry material and place in appropriate waste disposal container Dispose of via a licensed waste disposal contractor.
Welding gas	Workshop	Yes	Ventilation	Respirator	Occupational Release: 1) Avoid heat, flames, sparks and other sources of ignition. 2) Stop leak if possible without personal risk. 3) Reduce vapours with water spray 4) Keep unnecessary people away, isolate hazard area and deny entry. 5) Remove sources of ignition. 6) Ventilate closed spaces before entering.
Effluent	Administration Building, Control Room, Weighbridge	No	Access to council or commercial vacuum/ pump truck, soil,	PVC Gloves, goggles, overalls	Accidental Release Measures 1) Contaminated area must be clearly marked or cordoned off to restrict access.

and Pit Cr	ib	sand, bleach,	2) Protective clothing should be worn
room		hydrated lime	when cleaning up a sewage spill.
			3) If the spilled material can't be
			recovered using hand tools, a commercial
			vacuum / pump truck should be called to
			remove all visible liquid and solid material.
			4) When the area is visibly clean,
			either a chlorine / water solution or
			hydrated lime should be applied to the spill
			area to disinfect.
			5) If a major spill has occurred
			hydrated lime should be applied to the area
			in place of chlorine bleach
			6) .Enough hydrated lime should be
			applied to raise the pH to at least 12. By
			raising the pH to 12 for at least 1 hour, the
			area will be disinfected.
			7) Because lime is a caustic material,
			access to the area treated with lime must be
			restricted during the disinfection period.

 $_{
m (1)}$ This information is drawn from a review of the SDS or manufacturer / supplier technical information


7.3 Emergency Response Map


In addition to the PIDS the site needs to prepare an emergency response map that provides the following information;

- address of site
- location of pollutant storage
- location of safety equipment
- emergency evacuation / muster points
- stormwater drains / flow paths
- sensitive receivers
- sediment dam overflow locations
- location of SDS
- surrounding area that is likely to be affected by a pollution incident
- discharge location of stormwater drains to nearest water coarse or water body

Existing site maps that have been developed to comply with Holcim SHE system requirement 1.84 may be used if all the required items have been included. If an existing map is not available it should be created.

It is important to clearly identify these items so as to be able to respond in an emergency situation.

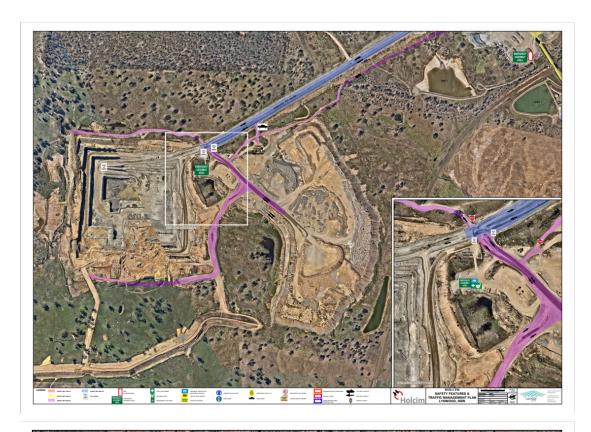

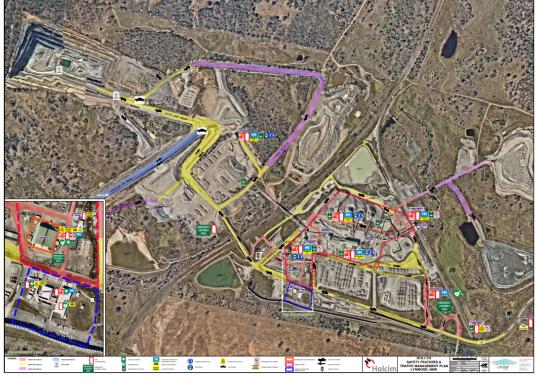

7.4 PIRMP Review

Review of PIRMP will be undertaken to check that the information is accurate and current and that the plan is capable of being implemented in a workable and effective manner. Reviewing shall be undertaken in the following ways:

The PIRMP will be tested annually and any identified updates or changes will be made. The PIRMP will be tested and reviewed within one month from the date of any pollution event that triggers this PIRMP. The review will also consist of assessment of any additional hazards and control measures.

In addition to site evacuation drills, a mock environmental incident will be done once a year to ensure all site personnel are following training and correct procedures. The mock scenario will be set and all the actions will be captured on the check sheet. Based on these mock incidents, the Site manager and the Planning and Environmental Coordinator will review the site personnel preparedness and site procedures to identify gaps or areas for improvement. Records of the drill will be maintained, including follow up of opportunities for improvement identified during emergency drills.

7.5 Typical Holcim Response process

If it is suspected that an incident may cause material environmental harm the Pollution Incident Management Response Plan will be executed. This plan is based on seven phases:

- **1.** Assess
- 2. Stop
- **3.** Notify
- 4. Contain
- **5.** Mitigate
- **6.** Clean up
- **7.** Review

Details of the requirements and responsibilities for each phase are explained below.



Notify

Contact key individuals

- •Individuals responsible for activating and managing plans (nominated site representatives)
- Individuals authorised to notify and coordinate relevant authorities (nominated site representatives)

•Contact Relevant Authorities

- •Firstly, call 000 if the incident presents an immediate threat to human health or property.
- •If the incident does not require an initial combat agency, or once the 000 call has been made, notify the relevant authorities in the following order. The 24-hour hotline for each authority is given when available:
- •the Appropriate Regulatory Authority
- EPA
- ·Ministry of Health via the local Public Health Unit
- WorkCover Authority
- •the local authority if this is not the ARA
- •Fire and Rescue NSW
- •Specific contact details are provided in appendix A

Contain

- Utilise barriers (absorbent booms, banks of soil or any other safe objects) or spill absorbent to prevent the emission from spreading.
- When an emission is on a hard surface use appropriate absorbent materials ie absorbent granules or sand
- •The main priority is to prevent the emitted material from discharging off site

Mitigate

- Implement environmental controls downstream of pollution source to prevent/minimise further impact to receiving environment
- Example:
- A Fuel spill discharged into quarry dam. Mitigation controls to ensure this spill is not spread may include closing of weirs, or outlets, ensuring water cart does not fill from affected dam etc.

LUB

- •Clean up and remedial actions to restore the environment
- Disposal of pollutants in accordance with regulations
- Refer to the Pollution Information Data Sheets (PIDS) for information on handling pollutants and the clean-up process.

Clean -up

Review

- Conduct an investigation into the event and assist the EPA and investigators with external enquiries
- Complete internal reporting;
- •As per Holcim SHE requirement 5.1
- Test the effectiveness of Pollution Incident Response Management Plan annually and one month after the incident to ensure controls are replenished.
- Testing protocol is provided in appendix B

7.6 Communication Strategy

It is a legal requirement of the Protection of the Environment Operations (POEO) Act, to notify key stakeholders in neighbouring properties that may been affected by an incident.

Communicating with neighbours and the community in the event of an environmental incident is vital as they have a right to know about any spill that can potentially lead to material harm to their properties or themselves. The communication strategy in the PIRMP provides sites with a method of communicating with key stakeholders.

Key stakeholders include neighbouring residential and/or commercial properties, sensitive receivers ie farms, hospitals schools within the area of impact. Consideration must be given to sensitive receivers that may be affected if the emission reaches a water body. For example a farmer that is cultivating crops down river from your site will need to be informed of a spill to prevent him spraying his crops with polluted irrigation water.

The PIRMP must include details of the mechanisms that will be used for providing early warnings and regular updates to the owners and occupiers of premises who may be affected by an incident occurring at the premises.

The communication strategy should also make reference to any actions or arrangements that will be in place to minimise the risk of harm to any persons who will be on the premises or who are likely to be on the premises at the time of an incident. This is a legislative requirement that needs to be included in the PIRMP.

For a table detailing the communication strategy for this site:

Refer to Appendix C – Community Notification Strategy

7.6 Staff Training

Sites need to develop a toolbox talk based on the PIRMP. This training should be delivered to all appropriate personnel on site and be conducted to include potential scenarios that may require implementation of the plan.

Frequency of training

Training for site staff should be repeated annually, and after each update to the plan. In the event of an incident requiring the PIRMP to be activated a training drill should be carried within one month of the incident occurring.

How Records of training are kept

Training records should be stored on site and in the Chris 21 data base. This data base is the primary online tool for tracking individual staff training records and frequency for training and refresh courses. These records are to be made available to relevant authorities on request.

7.7 Continual Improvement

It is a legislative requirement for this plan to be tested and updated on an annual basis and within one month of an incident.

To complete this requirement a Pollution Incident Response Test Checklist has been prepared and provided as Appendix B. The checklist includes the major elements of the plan that require testing:

- Contact numbers
- Evacuation drills
- Desktop assessment
- Staff training and awareness
- Environmental controls & PPE

Desktop assessments require site personnel, responsible for testing the plan, to select a scenario from the hazard and impact register (table 2) and ensure that all the required controls for the scenario are in place. During the desktop assessment environmental control and PPE equipment supplies should be inspected to ensure that they are functional and that there are enough materials to ensure that emissions relating to the scenario can be controlled effectively and safely.

Appendix A Emergency Contact Details

Contacts	Phone Number
Individuals responsible for activating the plans and managing the response	Wayne Beattie – 0419 476 900
Individuals Authorised to Notify and Coordinate Relevant Authorities	Wayne Beattie – 0419 476 900
Emergency Services	000
EPA	131 555
The Ministry of Health via the local Public Health Unit	Surveillance Officer (Goulburn) Lisa Stephenson - 02 4824 1840
(List of NSW numbers www.health.nsw.gov.au/publichealth/infectious/phus.asp)	
WorkCover Authority	13 10 50
Goulburn Mulwaree Council (If this is not DECCW)	02 4823 4444
(List of NSW Local Council Phone Numbers www.dlg.nsw.gov.au/dlg/dlghome/dlg_localgovdi rectory.asp)	
Fire and Rescue NSW	000
Marulan RFS	02 4841 1555
JR Richards and Sons Waste and Recycling Services Pty Ltd	1300 579 278
Emergency Spill Response	1300 579 278

Appendix B Pollution Incident
Response Test
Checklist

Date: 27/11/2024

Site: LYMWOOD

Address: Marulan

Pollution Incident Scenario: Fuel Spill In Workshop (HME Service)

Instructions

- 1. Select an Environmental Incident applicable to the site to test in a Pollution Scenario (this may include a major spill, equipment failure or breaches of license consent that may cause impacts onsite and to the surrounding community);
- 2. Using the scenario conduct a desktop review using the Test Checklist as a prompt to ensure that each component of the PIRMP is up to date;
- 3. Sign off the checklist, scan and send to the NSW Planning & Environmental Coordinator;
- 4. Planning & Environmental Coordinator will make amendments to the plans and submit these to the site managers for review and approval;
- 5. Site Managers to hold a tool box talk with staff on the details of the PIRMP and keep a copy of the PIRMP onsite for future reference.

Are all contact details within the plan current and up to date?	Phone Numbers	
	Currency	Updated Number
Individuals responsible for activating the plans and managing the response	Gordon Rippon	0497 757 226
Individuals Authorised to Notify and Coordinate Relevant Authorities	YES	
Emergency Services	YES	
EPA	YES	

The Ministry of Health via the local Public Health Unit	YES	
WorkCover Authority	YES	
Local Council	YES	
Fire and Rescue NSW	YES	
Additional Contacts relevant to the licensee's premises	N/A	
Other Organisations or agencies that need to be advised of the incident	N/A	

Environmental Hazards and Control Standards	Yes/ No	Actions
Are the descriptions of environmental hazards up to date?	YES	
Are the potential and likelihood of incidents that could occur still correct and relevant to the site operations?	YES	
Are the pre-emptive actions for risk management of the relevant activity correct and relevant to the site?	YES	
Is there an inventory of pollutants (including quantities of pollutants onsite)?	YES	
Is the listed safety equipment & PPE correct and up to date?	YES	

Is there a map/s located onsite detailing the following;	YES	
- The site and the surrounding area likely to be affected in the event of an incident		
- The Locations of storage/ holding points of pollutants		
- Stormwater drains and discharge points offsite		
Are the nature and objectives of staff training set out in the plan?	YES	
Are there details of mechanisms for providing early warnings and regular updates to the owners and occupiers?	YES	
Is there a copy of the plan onsite and up to date?	YES	

Has there been an evacuation drill in the last 12 months? Yes

Date: 08/08/2024

Notes: N/A

•	N/A
Comme	ents / Recommendations / Review
•	Review size and contents of spill kit on service cart. Review emergency shut off activation points on service cart Review shut emergency shut off procedures for service cart Review prestart procedures on HME in general
	on Incident Response Test Checklist Assessor:
2.534	

Improvements to the Pollution Incident Response Management Plan:

Appendix C – Community Notification Strategy

If there is an Environmental Incident that has the potential to cause harm to the following stakeholders they will be contacted by TELEPHONE

Stakeholder Component	Name	Contact Information
Neighbour to west of site (Lockyersleigh Creek Catchment)	Macca	Property Manager Macca on 0429 451 208
Neighbour to east of site (Joarimin Creek Catchment)	Burt Krause	0468 776 837
Council	Environmental Health	4823 4444
Orica	Brendan Wood	0412 108 571
Neighbour to the south	Bruce Dugan	0427 309 271